



PT. AMAN REJEKI INDONESIA

Integrated Solutions

No. : 026/ARI/E/IV/2021
Perihal : Penawaran ARI Simulator

Jakarta, 14 April 2021

Kepada Yth.

Bapak Dr. Capt. MASHUDI ROFIK, M.Sc

Direktur Politeknik Ilmu Pelayaran (PIP) Semarang

Jl. Singosari No. 2A, Semarang

Dengan hormat,

Berikut kami sampaikan penawaran harga untuk:

- Full Mission Ship Maneuvering Simulator (FMSMS) DNV Class A with Tug Handling
- Integration Full Mission Ship Maneuvering Simulator with Ship Stability Simulator

Demikian penawaran ini kami buat untuk informasi lebih lanjut, silahkan menghubungi **Aulivia Tandau** di No. HP: **085211213231** atau melalui email: **ats1982@gmail.com** Kami sangat senang untuk memberikan informasi lebih lanjut dan atau klarifikasi yang mungkin Anda butuhkan atas perhatiannya kami ucapkan terima kasih.

Hormat kami,

Aulivia Tandau Saksono

Direktur



PT. AMAN REJEKI INDONESIA

Integrated Solutions

Notification:

This is an official commercial offer from PT. AMAN REJEKI INDONESIA any changes in this document must be consult and authorized by the person which sign this document. Whole page in this document is CONFIDENTIAL and shall not be revealed to public

ARI and the ARI logo are trademarks of ARI. All other trademarks and copyrights are acknowledged

All picture in this proposal are only for indicative

All specification written in this proposal is minimum to run ARI Simulation

This proposal valid until 31 December 2021



1. FULL MISSION SHIP MANEUVERING SIMULATOR

1.1. BASIC SCOPE OF SUPPLY

INSTRUCTOR SOFTWARE CONSIST OF: • ARI Ship Maneuvering Simulator Instructor Station • ARI Ship Maneuvering Simulator Server Application • ARI GMDSS Module (Instructor) • ARI Assessment Module
SHIP TRAINEE STATION CONSIST OF: • Electronic Chart System Module • Radar/ARPA module Software • Visualization Software Modules • Advanced Visual System for Lookout View (Independent Viewing Station) • GMDSS Module • Navigational Light/Bridge Alarm module • Own Ship Conning/Steering console software based including autopilot, hand steering, NFU steering • Navigation aids simulation software module • Conning & Maneuvering Station software • Resource pack of sound databases • Resource pack for integration of hardware HMI components • Resources Ship and Exercise Area Package are: ☐ 20 own ship models ☐ 25 target ship models ☐ 10 exercise areas
ARI HARDWARE, HARDWARE INTERFACES CONSIST OF: • Maneuvering station • Steering Station • Radar Keyboard • ECDIS Keyboard • PTT Handsets • Screen Based Gyro • Azimuth Thruster Controls
INSTALLATION, COMMISSIONING & POWER UP, SYSTEM ACCEPTANCE TESTS • Project Consultancy • Site Layout, Design Drawings etc. • Power, Network Drawings • Factory Acceptance Test for Hardware Components • Integration with Engine Simulator • Site Acceptance
TRAINING AND HANDOVER [FIVE DAYS]
WARRANTY FOR 12 MONTHS
PACKING, FREIGHT AND TRANSIT INSURANCE FOR SHIPMENT



1.2. ADDITIONAL BRIDGE FEATURES

ADDITIONAL FEATURES:

- Anchoring and Mooring Module
- Ship to Ship
- Maneuvering using tugs
- Maneuvering with mooring lines fixed to jetty
- Maneuvering with mooring lines fixed to buoy
- Anti-Piracy Module
- Fire Control Detection Panel
- Bow/ Stern Monitoring System
- Hull Stress Monitoring
- Ballast Water Control Panel
- Torque Indicator
- Fire door/water tight door monitoring panel

1.3. TUG FEATURES

- Ship Assisting work
- Escort work
- High fidelity hydrodynamic modeling of tug behaviour
- Using custom tug controllers to perform Tug Handling Maneuvering
- Making fast and adjusting line length
- Making towage transit
- Basic rope behaviour under tension
- Visualisation with facility to 360° around the horizon
- Effect of wind and weather conditions
- Push/ Pull action by tug
- Procedural training in tug operations
- Conning and Maneuvering Station



2.1. INSTRUCTOR & INDICATIVE TRAINEE STATION

INSTRUCTOR STATION



Indicative Instructor Station

INSTRUCTOR CAPABILITIES

The Instructor Station is a PC based set up which allows control and monitoring of the exercise.

Instructor can Launch, Pause, Resume exercises including replays. Some of the available features for control and monitoring during exercises include:

- Control and monitoring of the available environmental conditions such as current, visibility, wind, swell, precipitation, clouds etc.
- Easy monitoring of the own-ship parameters in graph or log and student actions
- Start, stop, pause, continue, and restart of exercises
- Replay of recorded exercise data
- Control of the target ship shapes, signals, lights, etc.
- Control for target ships' course, speed, etc.
- Creating of hazardous and challenging conditions for trainee by fault injection in navigational equipment and machineries
- Control of tug deployment and operations of Tug
- Distress And Emergency Condition
- Distress/ Safety Signal from selected target vessel, including Parachute flare, Bouyant smoke, Red Star, White
- Assessment module for Trainee performance evaluation




2.2 TRAINEE BRIDGE LAYOUT & SPACE REQUIRE

Setup Bridge ARI Simulator dapat menggunakan layar TV LED dimana dalam penawaran ini sudah termasuk mock-up ruangan. Adapun untuk pelatihan (Training Center), kami menyarankan menggunakan bridge layout mulai dari 240°, menggunakan 7 LED TV dengan ukuran ruangan yang dibutuhkan **minimal 7m x 9m** namun jika dikemudian hari ingin dilakukan upgrade disarankan ruangan minimal 10m x 10m

Setup Tug Simulator ARI menggunakan layar TV LED dimana dibutuhkan 12 LED TV yang dipasang secara vertikal, dengan ukuran ruangan yang dibutuhkan **minimal 7m x 7m**.

Berikut adalah setup Field Of View (FOV) untuk Bridge Simulator dan Tug Simulator:

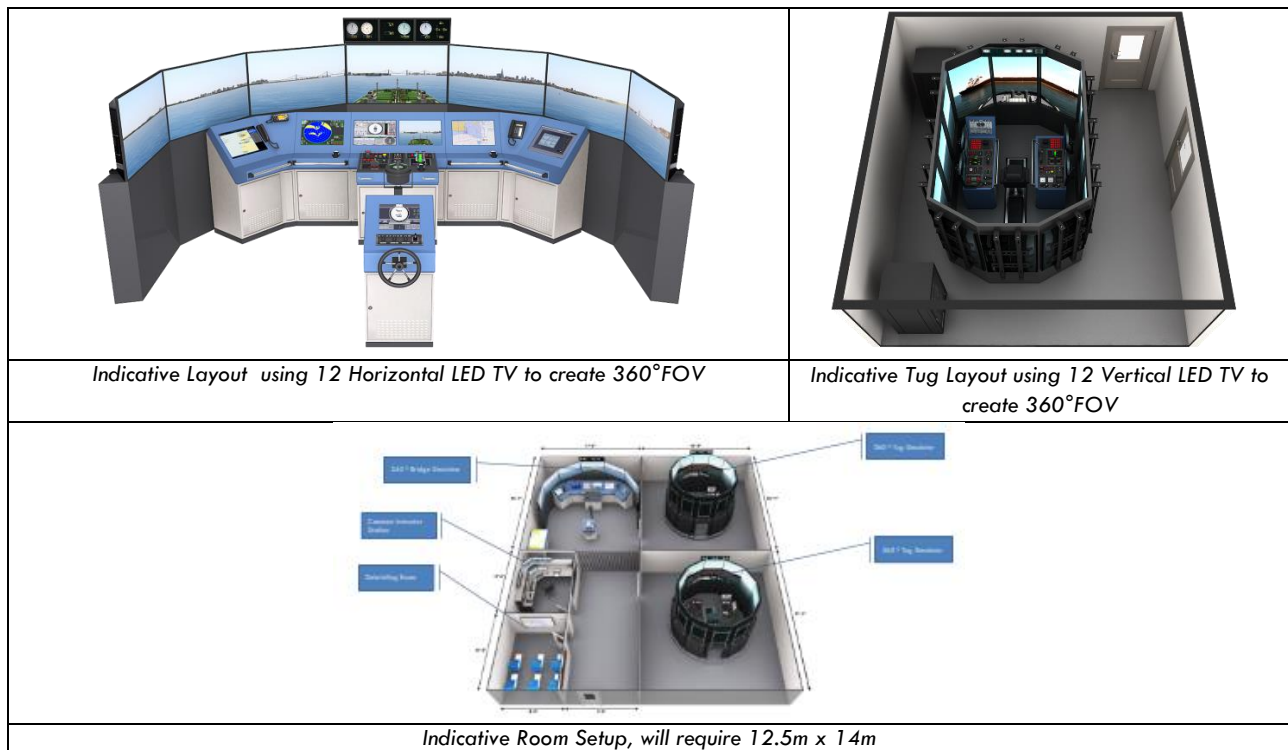



2.3. HARDWARE HMI CONTROL DEVICES AND OTHER COMPONENTS [PROVIDED BY ARI]

MANEUVERING & CONNING CONSOLE HARDWARE CLASS A




Indicative Setup for Maneuvering Console DNV Class A

The Conning and Manoeuvring hardware control includes:

- Thruster Control Panel with Alarms, Power Request, thruster ready status
- Dual Handle Engine Telegraph
- General Alarm Panel
- Winch Panel
- Anchor Panel
- Doppler Log
- Engine Panel consisting of Alarm Panel, Control Panel and Status Panel
- Sound Panel
- View Port Control with joystick
- Track Ball
- Lamp Test and Dimmer Panel
- CPP Pitch Controller



MANEUVERING CONSOLE AFT

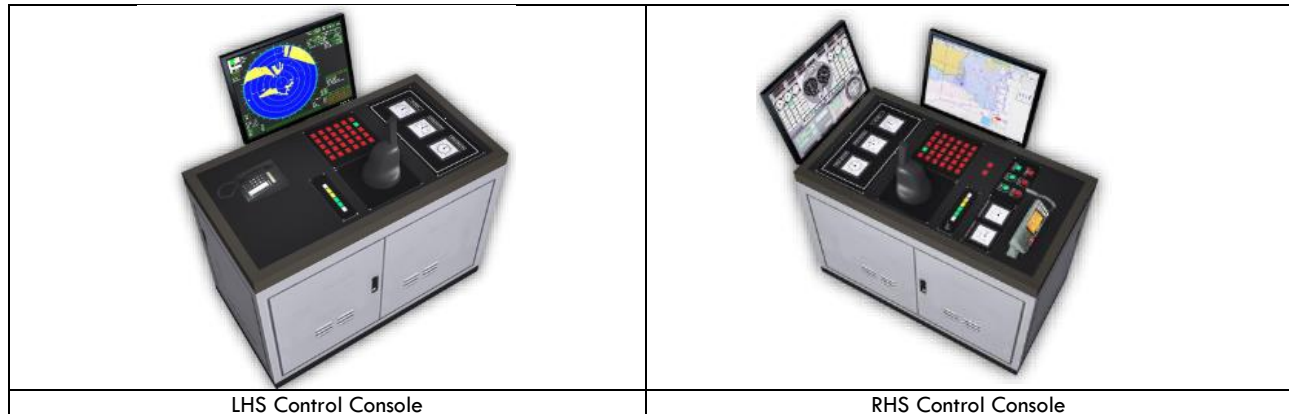

LHS Control Console

RHS Control Console

OWN SHIP STEERING HARDWARE CONSOLE

		• State of the art autopilot simulated panel • Main steering module display with Digital / Analogue Gyro/Magnetic compass display, steering motor/pump selectors, Digital/Analogue ROT and rudder angle, Fwd./Lateral speed displays, NFU Tiller, Auto, Hand, NFU and Remote Control steering modes, pump indicators and controls • Realistic Steering Wheel with main steering panel • Relevant alarms and indicators																		
Indicative picture of Ownship Screenbased Steering Hardware																				
		<table border="1"> <thead> <tr> <th colspan="2">Specification details basic versions</th> </tr> </thead> <tbody> <tr> <td>Materials / Finish</td> <td>Steel A2, Al, POM, alodine, powder coating</td> </tr> <tr> <td>Weight (net)</td> <td>Approx. 3 kg</td> </tr> <tr> <td>Movement, LF150-01-19 / LF150-01-30</td> <td>$\pm 60^\circ / \pm 155^\circ$</td> </tr> <tr> <td>Detent</td> <td>In zero</td> </tr> <tr> <td>Panel plate</td> <td>96 x 144 mm</td> </tr> <tr> <td>Wheel diameter / grip</td> <td>350 mm / steel or padded</td> </tr> <tr> <td>Potentiometers</td> <td>Single 5 kΩ, linear</td> </tr> <tr> <td>Termination</td> <td>16 pins contact with plug</td> </tr> </tbody> </table> For external dimensions and cut-out, customization and options see page 2	Specification details basic versions		Materials / Finish	Steel A2, Al, POM, alodine, powder coating	Weight (net)	Approx. 3 kg	Movement, LF150-01-19 / LF150-01-30	$\pm 60^\circ / \pm 155^\circ$	Detent	In zero	Panel plate	96 x 144 mm	Wheel diameter / grip	350 mm / steel or padded	Potentiometers	Single 5 k Ω , linear	Termination	16 pins contact with plug
Specification details basic versions																				
Materials / Finish	Steel A2, Al, POM, alodine, powder coating																			
Weight (net)	Approx. 3 kg																			
Movement, LF150-01-19 / LF150-01-30	$\pm 60^\circ / \pm 155^\circ$																			
Detent	In zero																			
Panel plate	96 x 144 mm																			
Wheel diameter / grip	350 mm / steel or padded																			
Potentiometers	Single 5 k Ω , linear																			
Termination	16 pins contact with plug																			
Indicative picture of Steering Hardware																				



RADAR/ARPA & ECDIS KEYBOARD SERTA PERALATAN KOMUNIKASI (Indicative Picture)

		Radar Keyboard
		MARIS ECDIS Keyboard
 PTT Handset	 Dummy VHF	Peralatan Komunikasi untuk GMDSS

3. COTS AND OTHER PEHRIPERALS FOR FULL MISSION SHIP MANEUVERING

No.	PENGUNAAN (MODULE)	SPESIFIKASI PC
COTS FOR BASIC SCOPE OF SUPPLY		
1	Radar/ARPA; ECDIS; NAVAIDS; GMDSS; Conning	11x Intel I Core 5, 4GB RAM, 1TB Internal HDD, OS – Windows (64bit) 11x Monitor LED 24"
2	Docking Module	1x Intel I Core 5, 8GB RAM, 1 TB Internal HDD, OS – Windows (64bit) with Nvidia Graphic Card 1x Monitor LED 24"
3	Overhead Instrument Module	3x Intel I Core 7, 8 GB RAM, 1TB Internal HDD, OS - Windows (64 bit) with Nvidia Graphic Card 9x monitor LED 20"
4	240° Visual (Optional)	6x Intel I Core 7, 8 GB RAM, 1TB Internal HDD, OS - Windows (64 bit) with Nvidia Graphic Card 12x LED TV 55"
5	Instructor Application Module	1x Intel I Core 7, 8 GB RAM, 1TB Internal HDD, OS - Windows (64 bit) with Nvidia Graphic Card 2x Monitor LED 24" 1x Printer (Print, Scan, Copy) 1x Keyboard + Mouse



6	Instructor GMDSS Module	1x Intel I Core 5, 4 GB RAM, 1TB Internal HDD, OS – Windows (64 bit) 1x Monitor LED 24"
7	Instructor Tug Application Module	2x Intel I Core 7, 8 GB RAM, 1TB Internal HDD, OS – Windows (64 bit) with Nvidia Graphic Card 2x Monitor LED 24"
8	Repeater	1x Radar Repeater LED 24" 3x Visual Repeater LED 24" (Bridge View) 1x Intel I Core 7, 8 GB RAM, 1TB Internal HDD, OS – Windows (64 bit) with Nvidia Graphic Card
		6x Visual Repeater LED 24" (Tug View) 2x Intel I Core 7, 8 GB RAM, 1TB Internal HDD, OS – Windows (64 bit) with Nvidia Graphic Card
9	Debriefing	1x Intel I Core 5, 4 GB RAM, 1 TB Internal HDD, OS – Windows (64bit) 1x Projector with 70" Screen
10	BRIDGE MOCK UP 240° and 2 TUG MOCK UP 360°	Yes completed with Console & Chart Table on the Bridge and Air Conditioner (AC)
11	Network	1x Switch min 24 port, 1 Gbps 2x Switch min 16 port, 1 Gbps
12	UPS with Stabilizer, Electrical & LAN Cabling	Yes
13	Instructor Furniture & Standard room partition (Room size minimum 2m x 3m)	Yes
14	CCTV	Yes

4. SHIP STABILITY SIMULATOR

Fasilitas simulator kestabilan kapal dengan jenis kapal Bulk Carrier, yang mampu untuk mensimulasikan fenomena fisis stabilitas kapal. Simulator stabilitas kapal adalah software simulasi yang berfungsi untuk mensimulasikan fenomena kestabilan sebuah kapal dalam 3 sumbu vector (roll, pitch and heave).

Dengan pembebanan yang diberikan maka akan terjadi perubahan orientasi kapal setiap saat. Orientasi arah kapal dalam 3 sumbu vector setiap saat akan dihitung oleh software simulasi, kemudian dilakukan juga perhitungan parameter-parameter kestabilan kapalnya, yang ditampilkan dalam mode 2D maupun 3D. Dimana tampilan representasi 3D animation dimaksud dapat diperlihatkan perubahan-perubahan besar gaya dan posisi titik-titik sentral mekanika (center of gravity, center of buoyancy, metacentric, dll) setiap saat sebagai akibat perubahan bobot dan letak beban, yang ditunjukkan titik posisis dan magnitude dari setiap vector. Selain itu computer juga akan menampilkan kurva-kurva parameter kestabilan kapal dari model kapal tersebut.

Dengan menggunakan simulator kestabilan kapal ini dapat diperkenalkan kepada siswa tentang:

- 1) Konsep displacement
- 2) Menghitung posisi G kapal sesungguhnya saat kosong atau Light-Ship



- 3) Menghitung posisi G dalam arah membujur (Longitudinal): LCG
- 4) Menentukan posisi G dalam arah tegak (Vertikal): KG
- 5) Menentukan posisi G dalam arah melintang (transversal, lateral): TCG
- 6) Menghitung posisi G kapal akibat mengangkut muatan
- 7) Menghitung posisi G kapal akibat membongkar muatan
- 8) Menghitung posisi G kapal akibat memindah muatan
- 9) Menggeser muatan arah membujur untuk mengubah trim
- 10) Menggeser muatan arah melintang untuk mengubah senget
- 11) Mengatur tangki ballast untuk mendapatkan kondisi draft tertentu
- 12) Menilai kapal dalam kondisi tender atau stiff
- 13) Effect of slack water

Model kapal akan mengacu pada model kapal bulk carrier dengan konfigurasi sebagai berikut:




- Memiliki ruang palka
- Memiliki tangki ballast
- Memiliki tangki freshwater
- Memiliki tangki bahan bakar

Model kapal ini sekaligus digunakan untuk model kapal pada bridge simulator, sehingga efek kestabilan tadi dapat dirasakan perbedaannya pada saat kapal bergerak dan terganggu ombak.



PT. AMAN REJEKI INDONESIA

Integrated Solutions

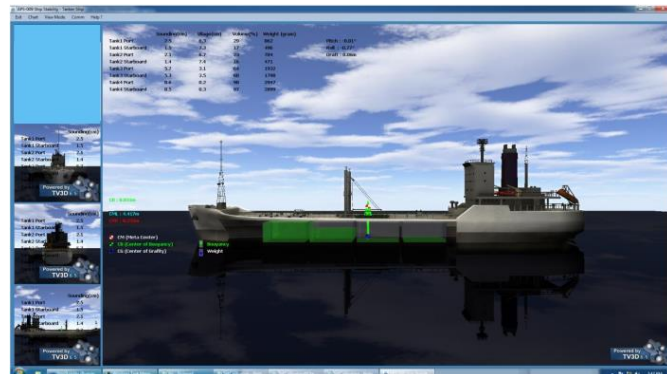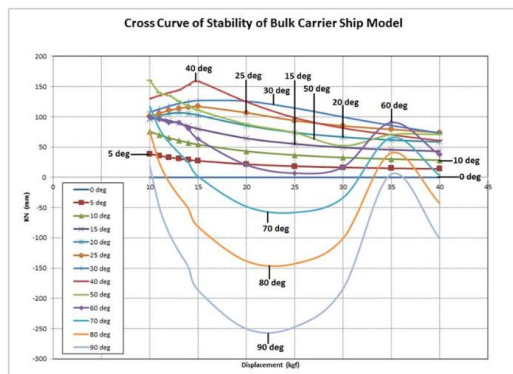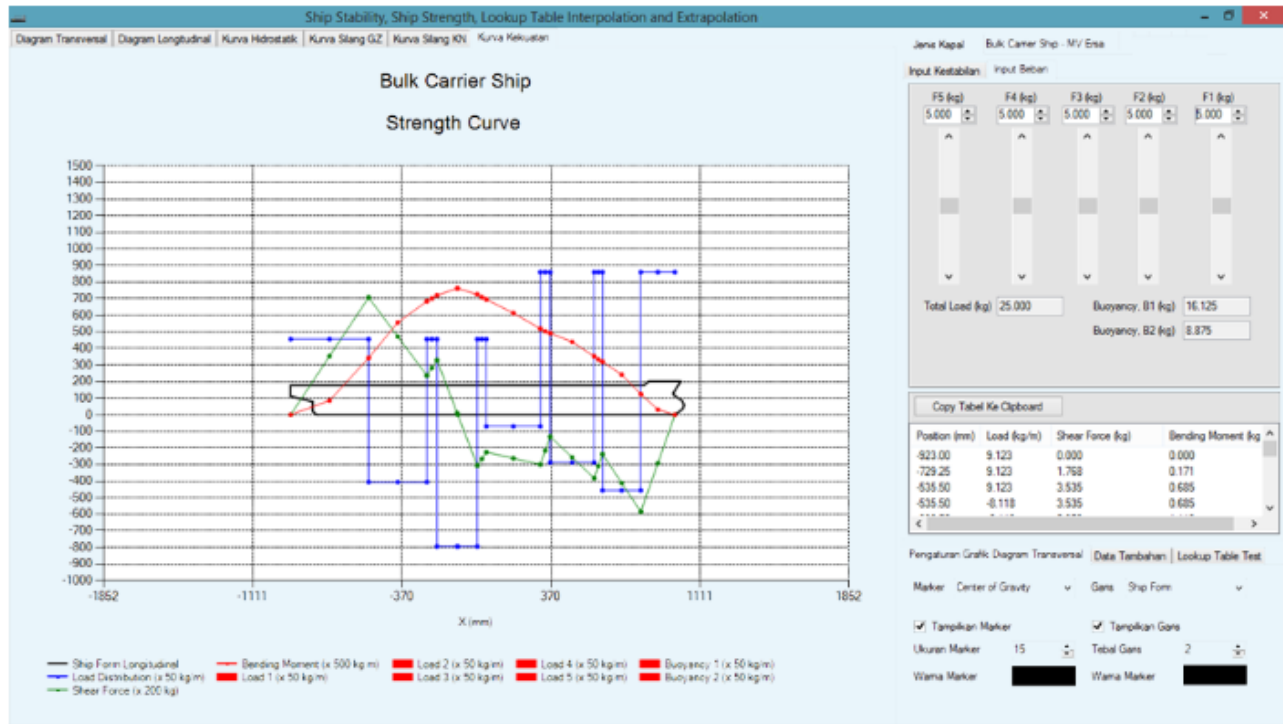

Indicative Picture of Ship Stability Simulator



5. COTS AND OTHER PEHRIPERALS FOR SHIP STABILITY SIMULATOR

No.	PENGUNAAN (MODULE)	Keterangan
1	Instructor Station Software with PC Instructor	Intel I Core 7, 8 GB RAM, 2TB Internal HDD + 256GB SSD, OS - Windows (64 bit) with Nvidia Graphic Card 1 x Monitor LED 24.5"
2	Studen Station with Student PC	6x Intel I Core 7, 8 GB RAM, 2TB Internal HDD + 256GB SSD, OS - Windows (64 bit) with Nvidia Graphic Card 6 x Monitor LED 24.5"
3	Module CBT: Ship Stability Simulator	6 x Intel I Core 7, 8 GB RAM, 1 TB Internal HDD, VGA Minimal 1GB, OS - Win 8 6 x Monitor LED 21,5"
4	Module CBT: Ship Stability Tutorial	Yes
5	Scoring Computation	Yes
6	Database for Trainee Data Entry, Instructor Data Entry, Exercise Result Print out	Yes
7	Console Station	Yes
8	Instructor Furniture	Yes
9	Trainee Furniture	Yes
10	Network	2x Switch min 8 port, 1 Gbps
11	UPS with Stabilizer, Electrical & LAN Cabling	Yes
12	Projector with Motorized screen	Yes

6. GARANSI

Garansi yang diberikan adalah untuk masa waktu 12 bulan setelah dilakukan instalasi dan berita serah terima terhadap simulator dari pihak kami kepada pengguna yang mana dalam proses tersebut telah dilakukan pemeriksaan bersama yaitu semua komponen tidak bercacat baik secara bentuk simulator itu sendiri, komponen didalamnya termasuk komponen penunjang seperti tampilan luar yang telah sesuai dengan spesifikasi yang diberikan oleh kami dan simulator tersebut telah berhasil disimulasikan pada kondisi normal pelatihan.

Keamanan kelistrikan dan tempat peletakan simulator bukan merupakan bagian dari Garansi. PT. ARI memberikan garansi pada lingkup pekerjaan pengadaan simulator didalam ruangan yang disediakan oleh klien.

PT. ARI memberikan tanggap layanan dalam waktu 3x24 jam atau maksimal 5x24 jam (LUAR JABODETABEK) untuk melakukan pemeriksaan awal terhadap kendala yang ada.



Garansi meliputi:

1. Garansi software, PT. ARI memberikan garansi bahwa instalasi yang terdapat didalam PC merupakan instalasi asli dan original dari pabrikan, baik WINDOWS maupun dari Applied Research International (ARI Simulatio) merupakan milik klien. *Upgrade software* merupakan opsional, terkecuali sifatnya **mandatory** yang terkait akibat perubahan pada peraturan IMO dan STCW atau WINDOWS yang sudah *End Of Life*.

Garansi akan hangus jika ditemukan:

- Virus yang diakibatkan oleh kelalaian pengguna, seperti memasukan *Flash Disc*, dll yang mengandung virus atau akibat pengaksesan internet yang tidak bertanggung jawab.

Catatan: *Virus dapat menyebabkan “down time”, sehingga pengerjaannya tidak terikat waktu*

- Crash pada software akibat kelalaian penggunaan seperti cara mematikan tidak sesuai prosedur dan juga mati mendadak akibat mati lampu), untuk itu disarankan pengguna menyiapkan UPS untuk mencegah kejadian diatas.
 - Melakukan *re-install* software simulator, tanpa memberitahukan ataupun berkoordinasi dengan pihak ARI Simulator
2. Garansi PC dan Hardware penunjang, PT. ARI memberikan garansi bahwa spesifikasi tertera telah mendapat persetujuan dan telah sesuai standar yang diminta oleh pihak ARI Simulation. Adapun jika spesifikasi yang tertera pada penawaran tidak lagi tersedia, maka kami akan memberikan **spesifikasi yang terbaru yang sesuai** untuk menjalankan aplikasi simulator. Garansi PC dan Hardware penunjang akan hangus jika terjadi hal-hal berikut ini:
 - PC dan Hardware penunjang tersiram air, kerusakan yang diakibatkan oleh hewan dan atau akibat kelalaian penggunaan lainnya yang tidak sesuai dengan *Standard Operating Procedure* (SOP) sehingga menyebabkan kerusakan pada PC dan hardware penunjang
 - Kerusakan yang diakibatkan sambaran petir, lonjakan voltase listrik kedalam ruangan simulator, kebakaran, serta kerusakan yang terjadi karena pergeseran konstruksi bangunan yang diakibatkan oleh perubahan struktur maupun bencana alam yang menyebabkan kerusakan pada PC dan Hardware penunjang

Catatan: *UPS tidak termasuk dalam garansi Hardware*

INSTALASI & KUNJUNGAN

Pekerjaan instalasi simulator di lokasi adalah sebagai berikut:

- Pembuatan jaringan internet dan kelistrikan didalam ruangan simulator
- Pembuatan *mock-up* ruangan dan penempatan alat simulasi
- *Setting up* LAN dan menghubungkan semua komputer kedalam jaringan
- *Loading of SW* pada komputer yang disediakan



PT. AMAN REJEKI INDONESIA

Integrated Solutions

- *Testing of Simulator*
- Penyerahan dan pelatihan

Catatan: *Remote support dari India, diperlukan koneksi internet minimal 1Mbps dan pekerjaan PT.ARI tidak termasuk menghubungkan simulator ke jaringan internet serta penarikan kabel listrik dari luar kedalam ruangan*

Selama masa garansi kami memberikan batasan kunjungan adalah 10 hari kerja sedangkan untuk *remote support* (langsung dari ARI Simulation) diberikan batasan 30 jam. Untuk kelebihan batasan kunjungan dikenakan biaya Rp. 3.000.000 per hari kunjungan dan untuk *remote support* dikenakan biaya Rp. 7.500.000 per hari. Untuk luar wilayah Jabodetabek, akan dikenakan biaya tambahan berupa akomodasi dan transportasi sesuai tagihan.

GARANSI HABIS

Setelah masa garansi habis, untuk menjaga agar peralatan tetap pada kondisi baik, maka kami menyarankan untuk melakukan perpanjangan masa garansi. Dengan memperpanjang masa garansi maka kami akan memastikan peralatan simulator tetap terjaga baik.

Jika klien tidak melakukan pembelian paket perpanjangan garansi atau jika telah melewati kuota waktu dari paket perpanjangan garansi, maka klien akan dikenakan biaya kunjungan Rp. 3.000.000,- per hari dan untuk *remote support* dari ARI Simulation dikenakan biaya Rp. 7.500.000 per hari. Untuk wilayah luar Jabodetabek, akan dikenakan biaya tambahan berupa akomodasi dan transportasi sesuai tagihan. Jika terdapat penggantian Hardware maupun Human Machine Interface (HMI), maka pembeli akan dibebankan biaya perbaikan atau penggantian sesuai harga barang ditambahkan 15%.

PELATIHAN

ARI Simulation akan menyediakan pelatihan, paska instalasi kepada pelatih (instruktur) maupun pihak yang bertanggung jawab terhadap operasi simulator. Rata-rata waktu pelatihan yang diperlukan adalah 4 hari kerja dan jika diperlukan perpanjangan waktu maka akan diberikan tambahan hari maksimal yaitu selama 2 hari kerja. Kegiatan pelatihan ini termasuk kegiatan peragaan alat simulasi (*commissioning*). Selain itu juga akan diserahkan manual penggunaan simulator kepada pengguna untuk dapat dipelajari lebih lanjut.

Perpanjangan masa pelatihan di Indonesia maka akan dikenakan biaya sebesar USD 1,350 per hari.

JAMINAN SUKU CADANG

PT. ARI menjamin ketersediaan suku cadang khususnya untuk suku cadang PC dan Hardware penunjang adalah selama 5 tahun. Selepas masa tersebut kami menyarankan untuk melakukan *upgrade* PC, yang mana bila *upgrade* dilakukan tidak akan menghilangkan *software* simulator yang telah dimiliki. Namun hal ini tidak berlaku jika WINDOWS sudah *End Of Life* (EOL), maka wajib dilakukan **Upgrade Software** ARI.



7. COMMERCIAL OFFER

Berikut adalah penawaran harga ARI Simulator dari kami:

No.	Keterangan	Harga
1	Full Mission Ship Maneuvering Simulator 240° Visual Class A with Tug Simulator and Integrated with Ship Stability Simulator	Rp. 20.286.947.000
	PPN 10%	Rp. 2.028.694.700
	Total Harga	Rp. 22.315.641.700

Keterangan:

1. Harga diatas sudah termasuk pajak
2. Harga diatas sudah termasuk biaya pengiriman sampai ke lokasi
3. Harga diatas sudah termasuk biaya *onsite installation*, integrasi, pelatihan dari ARI India selama 4 hari
4. Perkiraan waktu pekerjaan hingga pelatihan adalah 6 bulan
5. Harga berlaku sampai dengan tanggal 31 Desember 2021

8. BUYER PREPARATION

1. Ruangan yang memadai/ mencukupi untuk meletakkan simulator tanpa tiang ditengah ruangan
2. Listrik masuk kedalam ruangan minimal adalah 20.000 Watt
3. Tenaga pengajar serta teknisi (IT)



PT. AMAN REJEKI INDONESIA

Integrated Solutions

9. CERTIFICATION

DNV GL	
STATEMENT OF COMPLIANCE	
Statement No: 023/180511 DNV GL Id No: 142684	
Particulars of Product	
Function Area:	Bridge Operation Simulator
Class Notation	INTEGRATED SIMULATOR SYSTEM, NAUT AW (SIM), DYNPOS - AUT (SIM), HSC, TUG, ICE, AHTS, IN
Name and type designation:	ARI-NAVSIM100000λn Dry Cargo Ships, Container Ships, RO/RO Ships, Passenger Ships, Oil Tankers, Chemical Tankers, Liquefied Gas Tankers, Compressed Gas Tankers Naval, Naval Support, Naval Landing Craft Offshore Service Vessel - Anchor Handling, Towing, Supply, AHTS, Windfarm Maintenance, Standby Vessel, + Vessel of Special Operations - Crane Vessel, Cable Laying Vessel, Pipe Laying Vessel, Diving Support Vessel, Fire Fighter, Semi-Submersible Heavy Transport Vehicle, Icebreaker, Tug, Dredger, Pusher, Inland Water Craft, Fishing Vessel, Stern Trawler
Particulars of Manufacturer	
Manufacturer:	ARI Simulation
Manufacturer address:	Applied Research International
This is to confirm:	
That the above product is found to comply with Class A- Standard for Certification of Maritime Simulators No. DNVGL-ST-0033 April 2018.	
Application	
The above Standard is based on requirements in the STCW Convention, Regulation I/12 and corresponding Industry standard and guidelines.	
This Statement is valid until 2023-05-11 , provided the requirements for the retention of the Statement will be complied with.	
Issued at Sandefjord on 2018-05-11	
Nordholm, Aksel David	for DNV GL
Capt. Aksel David Nordholm Manager Simulator Certification	 Partha Basu Auditor
This Statement is subject to terms and conditions overleaf. Any significant change in simulation performance may render this Statement invalid.	
	Form code: MSS 301
	Revision: 2018-03
	www.dnvgl.com
	Page 1 of 3
© DNV GL 2014. DNV GL and the Horizon Graphic are trademarks of DNV GL AS.	

STATEMENT OF COMPLIANCE

Statement No:
003/180511
DNV GL Id No:
142684

Particulars of Product

Function Area:

Bridge Operation Simulator

Name and type designation:

ARI-NAVSIM10000λn
ECDIS, Radar/ARPA & Navigational Aids

Particulars of Manufacturer

Manufacturer:

ARI Simulation

Manufacturer address:

Applied Research International

This is to confirm:

That the above product is found to comply with Class A- Standard for Certification of Maritime Simulators No. DNVGL-ST-0033 April 2018.

Application

The above Standard is based on requirements in the STCW Convention, Regulation I/12 and corresponding industry standard and guidelines.

This Statement is valid until **2023-05-11**, provided the requirements for the retention of the Statement will be complied with.

Issued at **Sandefjord** on **2018-05-11**

Nordholm, Aksel
David

Digitally signed by Nordholm,
Aksel David
Date: 2018.05.11 07:53:08 +02'00'

for **DNV GL**

Capt. Aksel David Nordholm
Manager Simulator Certification

Partha Basu
Auditor

This Statement is subject to terms and conditions overleaf. Any significant change in simulation performance may render this Statement invalid.



Form code: MSS 301

Revision: 2018-03

www.dnvgl.com

Page 1 of 2

Application/Limitation

The simulator is capable of simulating a realistic environment for all of the applicable STCW competence requirements referred to in the column for Class A, B, C and S in Table 3-2.

Table 3-2 Competencies addressed by bridge operation simulator class					
<i>STCW reference</i>	<i>Competence</i>	<i>Class A (NAV)</i>	<i>Class B (NAV)</i>	<i>Class C (NAV)</i>	<i>Class S (NAV)</i>
Table A-II/1.3	Use of radar and ARPA to maintain safety of navigation	A	B	C	(S)
Table A-II/1.4	Use of ECDIS to maintain the safety of navigation	A	B	C	(S)
Table A-II/1.5	Respond to emergencies	A	B	C	(S)
Table A-II/1.6	Respond to a distress signal at sea	A	B	C	(S)
Table A-II/2.6	Maintain safe navigation through the use of information from navigation equipment and systems to assist command decision-making	A	B	C	(S)
Table A-II/2.7	Maintain the safety of navigation through the use of ECDIS and associated navigation systems to assist command decision making	A	B	C	(S)

This Statement of Compliance is for the manufacturer offering the simulator for examination or mandatory simulator training and complies with the requirements of DNVGL-ST-0033 Maritime Simulator Systems.

Based on this statement of compliance, maritime training providers in possession of simulators that comply with the requirements of the standard can apply for a product certificate for "Maritime simulator". The simulator's function area and the simulator class according to the standard will be stated on the certificate.

STATEMENT OF COMPLIANCE

Statement No:
005/180511
DNV GL Id No:
142684

Particulars of Product

Function Area:	Radio Communication Simulator
Name and type designation:	ARI-COMMSIM10000λn

Particulars of Manufacturer

Manufacturer:	ARI Simulation
Manufacturer address:	Applied Research International

This is to confirm:

That the above product is found to comply with Class A- Standard for Certification of Maritime Simulators No. DNVGL-ST-0033 April 2018.

Application

The above Standard is based on requirements in the STCW Convention, Regulation I/12 and corresponding industry standard and guidelines.

This Statement is valid until **2023-05-11**, provided the requirements for the retention of the Statement will be complied with.

Issued at **Sandefjord** on **2018-05-11**

Nordholm, Aksel
David

Digitally signed by Nordholm,
Aksel David
Date: 2018.05.11 07:55:46 +02'00'

for **DNV GL**



Capt. Aksel David Nordholm
Manager Simulator Certification

Partha Basu
Auditor



Application/Limitation

The simulator is capable of simulating a realistic environment for all of the applicable STCW competence requirements referred to in the column for Class A, B, C and S in Table 5-2.

Table 5-2 Competencies addressed by radio communication simulator class

<i>STCW reference</i>	<i>Competence</i>	<i>Class A (COM)</i>	<i>Class B (COM)</i>	<i>Class C (COM)</i>	<i>Class S (COM)</i>
Table A-IV/2.1	Transmit and receive information using GMDSS subsystems and equipment and fulfilling the functional requirements of GMDSS	A	B	C	
Table A-IV/2.2	Provide radio services in emergencies	A	B	C	

This Statement of Compliance is for the manufacturer offering the simulator for examination or mandatory simulator training and complies with the requirements of DNVGL-ST-0033 Maritime Simulator Systems.

Based on this statement of compliance, maritime training providers in possession of simulators that comply with the requirements of the standard can apply for a product certificate for "Maritime simulator". The simulator's function area and the simulator class according to the standard will be stated on the certificate.



PT. AMAN REJEKI INDONESIA

Integrated Solutions



Certificate of Registration

PT. Aman Rejeki Indonesia

Springhill Office Tower Suite 10E, Jl. Benyamin Sueb Ruas D7 Blok D6, Kemayoran,
Jakarta 14410, Indonesia.

Operate a management system that complies with the requirements of

ISO 9001:2015

With the scope:

Provision of Supply, Installation and Services of Maritime Educational
Product and Management Consultant

EA Code: 33 & 35


Certificate No. QS 4808

Originally Registered: 12th January 2017

Registered by WQA: 12th January 2017

Re-Certification: 12th January 2023

Latest Issue: 13th January 2020


Signed on behalf of WQA

Validity of this certificate can be checked by contacting:
Worldwide Quality Assurance Ltd
Severn House,
Mandale Business Park,
Durham,
DH1 1TH
www.worldwideqa.com



134

This certificate remains the property of Worldwide Quality Assurance Ltd and must be returned on request.

WQA 14C, Issue 8



PT. AMAN REJEKI INDONESIA

Integrated Solutions



Lloyd's
Register

Current issue date: 8 July 2020
Expiry date: 29 July 2023
Certificate identity number: 10280622

Original approval(s):
ISO 9001 - 30 July 2008

Certificate of Approval

This is to certify that the Management System of:

**Applied Research International Pvt.
Ltd.**

46/13, E-Block, Okhla Industrial Area, Phase-II, New Delhi, 110020, India

has been approved by Lloyd's Register to the following standards:

ISO 9001:2015

Approval number(s): ISO 9001 – 0048141

This certificate is valid only in association with the certificate schedule bearing the same number on which the locations applicable to this approval are listed.

The scope of this approval is applicable to:

The design and development of software, simulators, computer and model based training aids.

Luis Cunha

Area Operations Manager - SAMEA

Issued by: Lloyd's Register Quality Assurance Limited



Lloyd's Register Group Limited, its affiliates and subsidiaries, including Lloyd's Register Quality Assurance Limited (LRQA), and their respective officers, employees or agents are, individually and collectively, referred to in this clause as 'Lloyd's Register'. Lloyd's Register assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract. Issued by: Lloyd's Register Quality Assurance Limited, 63-64, Kalpataru Square, 6th floor, Kondivita Lane, Off Andheri-Kurla Road, Andheri (E), Mumbai, 400059, India for and on behalf of: Lloyd's Register Quality Assurance Limited, 1 Trinity Park, Bickenhill Lane, Birmingham B37 7ES, United Kingdom

Page 1 of 2



SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL	
		JML	SATUAN			
A	BRIDGE AND TUG SIMULATOR SOFTWARE					
1	Instructor Station Perangkat Lunak Instruktur 1.1 Perangkat Lunak Instruktur Stasiun instruktur menggunakan pada PC yang memungkinkan untuk mengendalikan dan memonitor simulasi pelatihan. Instruktur dapat menjalankan, melakukan jeda/berhenti sejenak, dan melanjutkan kembali simulasi pelatihan. Beberapa Kemampuan yang tersedia untuk mengendalikan dan mengawasi jalannya simulasi 1.2 Assesment Tool Modul penilaian didesain berdasarkan kemampuan dari peserta pelatihan, Sistem penilaian ini didasarkan pada kemampuan individu untuk menimbang dan berperilaku sesuai kebutuhan operasional lapangan secara 'real time' Moda pembelajaran ini menggunakan berbagai metode penilaian dalam bentuk angka untuk menilai dan mengukur kemampuan dari setiap peserta pelatihan. 1.3 Additional Features <i>For Bridge Including :</i> Anchoring and Mooring Module Ship to Ship Maneuvering using tugs Maneuvering with mooring lines fixed to jetty Maneuvering with mooring lines fixed to buoy Anti-Piracy Module Fire Control Detection Panel Bow/ Stern Monitoring System Hull Stress Monitoring Ballast Water Control Panel Torque Indicator Fire door/water tight door monitoring panel <i>For Tugs Including :</i> • Ship Assisting work • Escort work • High fidelity hydrodynamic modeling of tug behaviour • Using custom tug controllers to perform Tug Handling Maneuvering • Making fast and adjusting line length • Making towage transit • Basic rope behaviour under tension • Visualisation with facility to 360° around the horizon • Effect of wind and weather conditions • Push/ Pull action by tug • Procedural training in tug operations • Conning and Maneuvering Station	1	Lot	ARI SIMULATION	Rp	8,220,000,000
		1	Lot	ARI SIMULATION	Rp	150,000,000
		1	Lot	ARI SIMULATION	Rp	250,000,000
2	GMDSS Instruktur - VHF-DSC - MF/HF-DSC - NBDP - Inmarsat-SES - NAVTEX - EPIRB - Fleet 77 - AIS Sart - Portable VHF - Battery Panel - Remote Distress Alarm Panel - Intercom & PA	1	Lot	ARI SIMULATION	Rp	125,000,000



SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL	
		JML	SATUAN			
3	<u>Trainee Station</u> ECDIS - Fungsi dasar Navigasi - Fungsi pengecekan Perencanaan Rute - Fungsi Pengawasan Rute	1	Lot	ARI SIMULATION	Rp	150,000,000
4	RADAR/ARPA - Mampu memahami karakteristik <i>Radar LOTS</i> dan faktor yang mempengaruhi kemampuan kerjanya - Meningkatkan dan memelihara <i>radar display</i> - o Tombol <i>Standby – On</i> - o Mengubah <i>pulse length</i> - o Menyesuaikan kontrol untuk mendapatkan gambar yang optimal (<i>tuning, gain</i>) - o Menyesuaikan kontrol tampilan (<i>brilliance, range selector, range ring, VRM, EBL, heading marker, anti-clutter</i>) - o Menyesuaikan tampilan mode (<i>true motion, relative motion – unstabilised, relative motion – stabilized, north up, course up, head up</i>) - o Verifikasi <i>input compass</i> untuk tampilan yang relatif stabil, <i>compass</i> dan <i>log input</i> untuk tampilan gerakan yang sesungguhnya - o Menggunakan fungsi <i>centre offLot, centre reLot</i> - o Meningkatkan dan mengubah skala range - o Mengukur <i>ranges</i> dan <i>bearings</i> - Menunjukkan <i>manual radar plotting</i> : - o Menentukan <i>course, speed</i> dan aspek kapal lainnya - o Menentukan CPA dand TCPA - Menentukan posisi yang akurat kapal dengan radar - Identifikasi bantuan terhadap radar navigasi dan <i>safety</i> - Menggunakan <i>parallel indexing</i> pada radar navigasi - Menggunakan Radar untuk menghindari tabrakan atau senggolan - Mengamati efek/akibat curah hujan terhadap kemampuan deteksi Radar - Identifikasi <i>blind area s</i> dan <i>shadow areas</i> - Mengamati bagaimana <i>clutter</i> menutupi targets (sea clutter, rain clutter) - Meningkatkan dan memelihara tampilan pada ARPA - Memperoleh targets menggunakan fungsi ARPA - o Menggunakan <i>auto-acquisition zone(s)</i> - o Menghapus <i>acquired targets</i> - Mengamati proses penundaan dalam mendapatkan informasi target - Memperoleh informasi target - o <i>Course, speed, CPA, TCPA, BCR etc.</i> - Menggunakan ARPA untuk membantu menerapkan <i>COLREGS</i> - Mengamati dan interpretasi <i>True vectors</i> dan <i>Relative vectors</i> - Menggunakan tampilan <i>target history</i> - Mengamati dan intrepertasi peringatan dan <i>alarm</i> yang terhubung ke fungsi Radar dan ARPA - Menggunakan layar <i>performance</i> <i>Lot up</i> dand menggunakan <i>PI line</i> - Menggunakan lebih dari satu <i>PI line</i> - Menggunakan fungsi <i>Nav Marks</i> - Interpretasi gerakan sesungguhnya pada kapal dari rekaman <i>tracked echo</i> - Mengamati berbagai bentuk error pada tampilan RADAR/ARPA, termasuk contoh: - o <i>Heading marker error, variable range marker, gyro error</i> dan lain-lainnya - Mengamati faktor yang disebabkan oleh kesalahan interpretasi pada gambar radar seperti <i>interference, side echoes, multiple echoes, second trace echoes</i>, dan lain-lainnya	1	Lot	ARI SIMULATION	Rp	150,000,000
5	Visualisasi 225°	7	Lot	ARI SIMULATION	Rp	455,000,000



SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL
		JML	SATUAN		
	Visualisasi dapat menampilkan luasan visual sebesar 225° dengan kapal ownship dan kapal target yang dihitung berdasarkan hidrodinamika model kapal, sehingga mampu memberikan tingkat realisme yang sesuai dengan kekuatan, kondisi, objek, situasi, dan tindakan pengguna dari kapal tersebut.				
6	Conning/ Docking - Kontrol Rudder dan indikator - Indikator rate of Turn - Magnetic compass dan Gyro compass repeaters - Engine controls termasuk RPM dan thruster control - Doppler Log - Indikator waktu, kecepatan angin, jarak layar,serta kedalaman - Tampilan kendali lampu navigasi dari Own ship - Kontrol pada Own Ship Fog Horn (secara Auto/Manual) - Tampilan pilot card dan karakteristik Manuver dari kapal yang digunakan - Docking view - Panel Engine Alarm - Panel Engine Control - Tampilan Kontrol Telegraph (untuk kecepatan mesin dan arah)	1	Lot	ARI SIMULATION	Rp 105,000,000
7	Navigation Equipment - GPS - ECHO Sounder - Course Recorder - Automatic Identification System (AIS) - Doppler Log - Anchoring Mooring	1	Lot	ARI SIMULATION	Rp 105,000,000
8	Overhead Display - Rudder Angle Indicator - Rate of Turn Indiator - RPM Indicators - Anemometer - Time (simulation time of the day) - Doppler Log speeds	1	Lot	ARI SIMULATION	Rp 105,000,000
9	GMDSS Trainee - VHF-DSC - MF/HF-DSC - NBDP - Inmarsat-SES - NAVTEX - EPIRB - Fleet 77 - AIS Sart - Portable VHF - Battery Panel - Remote Distress Alarm Panel - Intercom & PA	1	Lot	ARI SIMULATION	Rp 125,000,000
10	TUG Visual 360° Visualisasi dapat menampilkan visual kapal tug dan kapal target yang dihitung berdasarkan hidrodinamika model kapal, sehingga mampu memberikan tingkat realisme yang sesuai dengan kekuatan, kondisi, objek, situasi, dan tindakan pengguna dari kapal tersebut.	24	Lot	ARI SIMULATION	Rp 1,560,000,000
11	TUG Radar	2	Lot	ARI SIMULATION	Rp 300,000,000



SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL
		JML	SATUAN		
	- Mampu memahami karakteristik <i>Radar LOTS</i> dan faktor yang mempengaruhi kemampuan kerjanya - Meningkatkan dan memelihara <i>radar display</i> - o Tombol <i>Standby – On</i> - o Mengubah <i>pulse length</i> - o Menyesuaikan kontrol untuk mendapatkan gambar yang optimal (<i>tuning, gain</i>) - o Menyesuaikan kontrol tampilan (<i>brilliance, range selector, range ring, VRM, EBL, heading marker, anti-clutter</i>) - o Menyesuaikan tampilan mode (<i>true motion, relative motion – unstabilised, relative motion – stabilized, north up, course up, head up</i>) - o Verifikasi <i>input compass</i> untuk tampilan yang relatif stabil, <i>compass</i> dan <i>log input</i> untuk tampilan gerakan yang sesungguhnya - o Menggunakan fungsi <i>centre offLot, centre reLot</i> - o Meningkatkan dan mengubah skala range - o Mengukur <i>ranges</i> dan <i>bearings</i> - Menunjukkan <i>manual radar plotting</i> : - o Menentukan <i>course, speed</i> dan aspek kapal lainnya - o Menentukan CPA dand TCPA - Menentukan posisi yang akurat kapal dengan radar - Identifikasi bantuan terhadap radar navigasi dan <i>safety</i> - Menggunakan <i>parallel indexing</i> pada radar navigasi - Menggunakan Radar untuk menghindari tabrakan atau senggolan - Mengamati efek/akibat curah hujan terhadap kemampuan deteksi Radar - Identifikasi <i>blind area s</i> dan <i>shadow areas</i> - Mengamati bagaimana <i>clutter</i> menutupi targets (sea clutter, rain clutter) - Meningkatkan dan memelihara tampilan pada ARPA - Memperoleh targets menggunakan fungsi ARPA - o Menggunakan <i>auto-acquisition zone(s)</i> - o Menghapus <i>acquired targets</i> - Mengamati proses penundaan dalam mendapatkan informasi target - Memperoleh informasi target - o <i>Course, speed, CPA, TCPA, BCR etc.</i> - Menggunakan ARPA untuk membantu menerapkan <i>COLREGS</i> - Mengamati dan interpretasi <i>True vectors</i> dan <i>Relative vectors</i> - Menggunakan tampilan <i>target history</i> - Mengamati dan intrepertasi peringatan dan <i>alarm</i> yang terhubung ke fungsi Radar dan ARPA - Menggunakan layar <i>performance</i> <i>Lot up</i> dand menggunakan <i>PI line</i> - Menggunakan lebih dari satu <i>PI line</i> - Menggunakan fungsi <i>Nav Marks</i> - Interpretasi gerakan sesungguhnya pada kapal dari rekaman <i>tracked echo</i> - Mengamati berbagai bentuk error pada tampilan RADAR/ARPA, termasuk contoh: - o <i>Heading marker error, variable range marker, gyro error</i> dan lain-lainnya - Mengamati faktor yang disebabkan oleh kesalahan interpretasi pada gambar radar seperti <i>interference, side echoes, multiple echoes, second trace echoes</i>, dan lain-lainnya				
12	TUG ECDIS - Fungsi dasar Navigasi - Fungsi pengecekan Perencanaan Rute - Fungsi Pengawasan Rute	2	Lot	ARI SIMULATION	Rp 300,000,000
13	TUG Conning LHS/RHS - Kontrol Rudder dan indikator - Indikator rate of Turn - Magnetic compass dan Gyro compass repeaters	2	Lot	ARI SIMULATION	Rp 130,000,000



SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL	
		JML	SATUAN			
14	Ownship and Sailing Area 5 Indonesia Sailing Area (Tj. Priok, Tj Perak, Selat Sunda, Selat Makasar, Sorong) 5 International Sailing Area (Singapore, Selat Malaka, Felixstowe, Gilbralta, Bosphorus) 20 Kapal Ownship 25 Kapal Target	1	Lot	ARI SIMULATION	Rp	100,000,000
BRIDGE AND TUG SIMULATOR HARDWARE						
1	Instruktur Bridge - Intel I Core 9, 8 GB RAM, 1TB Internal HDD, Nvidia Graphic Card - Windows 10 (64 bit) - Monitor LED 24" - Printer (Print, Scan, Copy) - Keyboard + Mouse	1	Unit	Unbranded	Rp	57,000,240
		2	Unit	LG 24MK430H	Rp	4,440,000
		1	Unit	Epson L3150	Rp	3,960,000
		1	Unit	Logitech MK220	Rp	300,000
2	Instruktur GMDSS - Intel I Core 5 , 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit) - Monitor LED 24" - Keyboard + Mouse - PTT Handset - Speaker 2.0	1	Unit	Unbranded	Rp	8,580,000
		1	Unit	LG 24MK430H	Rp	2,220,000
		1	Unit	Logitech	Rp	300,000
		1	Unit	ARI SIMULATION	Rp	600,000
		1	Unit	Logitech Z120	Rp	240,000
3	Instruktur Tug - Intel I Core 9, 8 GB RAM, 1TB Internal HDD, Nvidia Graphic Card - Windows 10 (64 bit) - Monitor LED 24" - Keyboard + Mouse	1	Unit	Unbranded	Rp	57,000,240
		2	Unit	LG 24MK430H	Rp	4,440,000
		1	Unit	Logitech MK220	Rp	300,000
4	Repeater Visualization Bridge - Intel I Core 9, 8 GB RAM, 1TB Internal HDD, Nvidia Graphic Card - Windows 10 (64 bit) - Monitor LED 24" Tug - Intel I Core 9, 8 GB RAM, 1TB Internal HDD, Nvidia Graphic Card - Windows 10 (64 bit) - Monitor LED 24"	1	Unit	Unbranded	Rp	8,580,000
		3	Unit	LG 24MK430H	Rp	6,660,000
		1	Unit	Unbranded	Rp	57,000,240
		3	Unit	LG 24MK430H	Rp	6,660,000
5	Repeater Radar Trainee - Monitor LED 24"	1	Unit	LG 24MK430H	Rp	2,220,000
6	Trainee Station ECDIS - Intel I Core 5 , 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit) - Monitor LED 24" - ECDIS Keyboard	1	Unit	Unbranded	Rp	8,580,000
		1	Unit	LG 24MK430H	Rp	2,220,000
		1	Unit	Logitech MK220	Rp	30,000,000
6	RADAR ARPA - Intel I Core 5 , 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit) - Monitor LED 24" - Radar Keyboard	1	Unit	Unbranded	Rp	8,580,000
		1	Unit	LG 24MK430H	Rp	2,220,000
		1	Unit	ARI SIMULATION	Rp	30,000,000



SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL	
		JML	SATUAN			
7	- Speaker 2.0	1	Unit	Logitech Z120	Rp	240,000
	VISUALISASI 240°					
	- Intel I Core 9, 8 GB RAM, 1TB Internal HDD, Nvidia Graphic Card - Windows 10 (64 bit)	4	Unit	Unbranded	Rp	228,000,960
8	- TV LED 65"	7	Unit	Samsung 55TU7000	Rp	151,200,000
	CONNING					
	- Intel I Core 5 , 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit)	1	Unit	Unbranded	Rp	8,580,000
9	- Monitor LED 24"	1	Unit	LG 24MK430H	Rp	2,220,000
	- Mouse Trackball	1	Unit	Logitech M570	Rp	1,140,000
	DOCKING					
10	- Intel I Core 5, 4 GB RAM, 1TB Internal HDD, Nvidia Graphic Card - Windows 10 (64 bit)	1	Unit	Unbranded	Rp	19,980,000
	- Monitor LED 24"	1	Unit	LG 24MK430H	Rp	2,220,000
	- Mouse	1	Unit	Logitech M170	Rp	150,000
11	NAVIGATION EQUIPMENT					
	- Intel I Core 5 , 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit)	1	Unit	Unbranded	Rp	8,580,000
	- Monitor LED 24"	1	Unit	LG 24MK430H	Rp	2,220,000
12	- Mouse	1	Unit	Logitech M170	Rp	150,000
	- Speaker 2.0	1	Unit	Logitech Z120	Rp	240,000
	OVERHEAD					
13	- Intel I Core 5, 8 GB RAM, 1TB Internal HDD, Nvidia Graphic Card - Windows 10 (64 bit)	1	Unit	Unbranded	Rp	19,980,000
	- Monitor LED 20"	3	Unit	LG20MK400H	Rp	5,130,000
	GMDSS TRAINEE					
14	- Intel I Core 5 , 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit)	1	Unit	Unbranded	Rp	8,580,000
	- Monitor LED 24"	1	Unit	LG 24MK430H	Rp	2,220,000
	- Keyboard + Mouse	1	Unit	Logitech MK220	Rp	300,000
15	- PTT Handset	1	Unit	ARI SIMULATION	Rp	600,000
	- Speaker 2.0	1	Unit	Logitech Z120	Rp	240,000
	Tug Station					
16	VISUALIZATION					
	- Intel I Core 9, 8 GB RAM, 1TB Internal HDD, Nvidia Graphic Card - Windows 10 (64 bit)	8	Unit	Unbranded	Rp	456,001,920
	- TV LED 55"	24	Unit	Samsung 55TU7000	Rp	259,200,000
17	ECDIS					
	- Intel I Core 5, 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit)	2	Unit	Unbranded	Rp	1,760,000
	- Monitor LED 24"	2	Unit	LG 24MK430H	Rp	4,440,000
18	- Mouse	2	Unit	Logitech M170	Rp	300,000
	RADAR					
	- Intel I Core 5, 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit)	2	Unit	Unbranded	Rp	17,160,000
19	- Monitor LED 24"	2	Unit	LG 24MK430H	Rp	4,440,000
	- Speaker 2.0	2	Unit	Logitech Z120	Rp	480,000
	- Mouse	2	Unit	Logitech M170	Rp	300,000
20	CONNING					
	- Intel I Core 5, 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit)	2	Unit	Unbranded	Rp	17,160,000
	- Monitor LED 24"	2	Unit	LG 24MK430H	Rp	4,440,000
21	- Mouse	2	Unit	Logitech M170	Rp	300,000
	GMDSS TRAINEE					
	- Intel I Core 5 , 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit)	2	Unit	Unbranded	Rp	17,160,000
22	- Monitor LED 24"	2	Unit	LG 24MK430H	Rp	4,440,000
	- Keyboard + Mouse	2	Unit	Logitech MK220	Rp	600,000



SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL	
		JML	SATUAN			
	- PTT Handset	2	Unit	ARI SIMULATION	Rp	1,200,000
	- Speaker 2.0	2	Unit	Logitech Z120	Rp	480,000
18	OVERHEAD					
	- Intel I Core 5, 8 GB RAM, 1TB Internal HDD, Nvidia Graphic Card - Windows 10 (64 bit)	2	Unit	Unbranded	Rp	39,960,000
	- Monitor LED 20"	6	Unit	LG 20MK400H	Rp	10,260,000
19	DEBRIEFING					
	- Intel I Core 5, 4GB RAM, 1 TB Internal HDD – Windows 10 (64bit)	1	Unit	Unbranded	Rp	8,580,000
	- Monitor LED 24"	1	Unit	LG 20MK400H	Rp	2,220,000
	- Projector with 70" Motorized Screen	1	Set	Infocus IN116XA	Rp	25,800,000
20	PERALATAN SIMULATOR					
	<u>Bridge Simulator</u>					
	- Sebuah Perangkat panel dalam kesatuan yang memiliki : General Alarm Panel Lamp Test Sound Signal Panel Bow Thruster Engine Order Telegraph Anchoring Panel Engine Telegraph View Port Controls Pitch Controller - Dual Telegraph Control - Bow Thruster Control	1	Lot	ARI SIMULATION	Rp	100,000,000
	<u>Tug Simulator</u>					
	- Sebuah Perangkat panel dalam kesatuan yang memiliki : Alarm Indicators M/E Speed Propeller Speed Thrust Direction Azimuth Thruster Controls Break pump prerssure indicator Main pump pressure indicator Towing Hook Nature	2	Unit	ARI SIMULATION	Rp	200,000,000
21	PERALATAN PENDUKUNG					
	- Speaker 5.1 Dolby® Digital 5.1 decoding Total watts: (RMS) 500-W Subwoofer: 165-W Satellites: 5 x 67-W System Frequency response: 35 Hz-20 KHz	3	Unit	Microlab	Rp	9,000,000
	- Switch 24 Port Standards and Protocols: IEEE 802.3, IEEE 802.3u, IEEE 802.3ab , IEEE 802.3x Interface: 24 10/100/1000Mbps RJ45 Ports (Auto Negotiation/Auto MDI/MDIX) Network Media: 100BASE-TX, 1000BASE-T : UTP CAT 5/5e (maximum 100m) EIA/TIA-568 100-ohm STOP (maximum 100m) RAM Buffer : 3.5 Mbits Power Supply: 100-240VAC, 50/60Hz Power Consumption: Maximum: 15.7 Watts	1	Unit	D-link	Rp	1,050,000
	- Switch 16 Port Standards and Protocols: IEEE 802.3, IEEE 802.3u, IEEE 802.3ab , IEEE 802.3x Interface: 16 10/100/1000Mbps RJ45 Ports (Auto Negotiation/Auto MDI/MDIX) Network Media: 10BASE-T: UTP CAT 3, 4, 5/5e cable (maximum 100m) EIA/TIA-568 100-ohm STOP (maximum 100m) RAM Buffer : 2 Mbits	2	Unit	D-link	Rp	1,908,000



SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL	
		JML	SATUAN			
22	Power Supply: 100-240VAC, 50/60Hz	1	Set	HIKVISION	Rp	13,320,000
	Power Consumption: Maximum: 9.00 Watts	3	Unit	Motorola	Rp	7,200,000
	- CCTV 8 Camera					
	- Walkie Talkie					
	BRIDGE AND TUG FURNITURE					
	Adapun pekerjaannya sebagai berikut:					
	- Instructor Furniture					
	Terdiri atas:					
	- Meja Custom Made (disesuaikan dengan ruangan)	1	Unit	SELF MADE	Rp	12,600,000
	- Kursi direktur	1	Unit	SELF MADE	Rp	3,600,000
	- Kursi Debriefing	20	Unit	Chitose	Rp	21,600,000
SUBTOTAL A					Rp	14,341,031,600
B	SHIP STABILITY					
23	SHIP STABILITY SOFTWARE					
	<u>SW Instructor Station</u>	1	Lot	SS ARI SIMULATION	Rp	529,868,250
	Meliputi :					
	- Exercise Data					
	- Mode Test					
	- Mode Training					
	- Ship Selection					
	- Requestable Assistant					
	- Scoring & Evaluation					
	- Object Payload Selection					
	- User Privileges					
	- Shutdown & Boot Up Automation System					
	<u>SW Student Station</u>	6	Lot	SS ARI SIMULATION	Rp	1,766,741,625
	Meliputi :					
	- Visual 3D					
	- Environment / scenery					
	- Camera View					
	- 2D Lighting and Materials Effect					
	- Animation Object					
	- Render Surface FX Effect (water, clouds)					
	- Inclinator Visualization (Pitching and Rolling)					
	- Objects Collision					
	- Objects Payload					
	- Vehicle Traffic					
	- Physics Calculation					
	- Buoyancy Effect					
	<u>Sound Effect</u>	1	Lot	SS ARI SIMULATION	Rp	58,984,575
	Meliputi :					
	- 3D Sound Effect					
	- Frequency Effect					
	<u>Visual DataBase</u>	1	Lot	SS ARI SIMULATION	Rp	361,118,250
	1. Port Area					
	Meliputi :					
	- Land size 1 x 1 km2					
	2. Ships Model					
	Meliputi :					
	- 3650 DWT Generic Cargo					
	- 4180 DWT Full Container Cargo					
	- 50000 DWT Bulk Carrier					
	3. Static Object					
	Meliputi :					



SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL
		JML	SATUAN		
	- Building - Vehicle - Fence - Trees - Human 4. Dynamic Object Meliputi : - Ship - Human - Boat - Animal 5. Texture Meliputi : - Texture - Texturing				
	Scoring Computation	1	Lot	SS ARI SIMULATION	Rp 127,500,000
	1. Accuracy Meliputi : - Object Payload Positioning - Weight and Balance - Stability on Rolling and Pitching 2. Speed Meliputi : - Simulation Accomplishing - Decision Marking of Object Payload Positioning 3. Safety Meliputi : - Volume and Dimension 4. Result Meliputi : - Passed / Failed				
	Data Base	1	Lot	SS ARI SIMULATION	Rp 112,500,000
	Meliputi : - Trainee Data Entry - Instructor Data Entry - Exercise Result Print Out				
24	SHIP STABILITY HARDWARE				
	1. PC Instructor Processor Type : Core I7 HDD : 2 TB + SSD : 256 GB VGA : 6GB Memory : 8GB DDR3 Monitor 24" Keyboard + Mouse OS Windows 10 Original	1	Lot	HP	Rp 33,331,800
	2. PC Student Processor Type : Core I7 HDD : 2 TB + SSD : 256 GB VGA : 6GB Memory : 8GB DDR3 Monitor 24" Keyboard + Mouse OS Windows 10 Ultimate Original	6	Lot	HP	Rp 199,990,800



SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL	
		JML	SATUAN			
	3. Projector with Motorized Screen - Projector : Bright (Lumens) : 3300 Contrast Ratio : 16000:1 Resolution : WXGA Lamp & Filter Life (Hours) : Up to 10000 Connection : HDMI Power Speaker (W) : 10 Short Projection Distance at 0.60m (inch) : 18 Power Supply (V) : AC 100 - 240 Frequency (Hz) : 50/60 Power Consumption (W) : 300 - Screen Projector Motorized 4:3 / Wide Screen Screen Size 2,0 x 1,5 M Remote	1	Lot	EPSON	Rp	25,800,000
	4. Sound System Indoor Speaker Passive 15 inch Mic Wireless Power Mixer	1	Lot	SONY	Rp	14,351,500
	5. Headset Wireless Headphone	6	Set	Logitech	Rp	6,840,000
	6. Network System Switch Hub UTP Cable Conduit	1	Lot	Custom	Rp	12,000,000
	7. Deck Console and Chair Solid Wood Painting	7	Lot	CUSTOM	Rp	50,400,000
25	SHIP STABILITY FURNITURE 1. Meja Instruktur Ukuran : 120 x 75 x 75 cm Class COD 128	1	Unit	CUSTOM	Rp	2,760,000
	2. Kursi Instruktur Ukuran w x d x h = 465 x 610 x 870 Frame Finishign : Powder Coating, Frame Colour : Black, Pholstery Material : Fabric	1	Unit	CUSTOM	Rp	1,500,000
	3. Almari Dokumen Material Plat besi bertutup kaca Ukuran 205 x 90 x 40 cm Sliding Glass Doors	1	Unit	CUSTOM	Rp	8,400,000
26	KOMPONEN PENDUKUNG SHIP STABILITY 1. Modul CBT : Ship Stability Simulator 100 Frame Content Multimedia : Animation Cathegory 2D & 3D Web Based Size 1366 x 1768 pixel	1	Modul	SS ARI SIMULATION	Rp	337,500,000




PT. AMAN REJEKI INDONESIA

Integrated Solutions

SPEFISIKASI SIMULATOR BRIDGE, TUG AND SHIP STABILITY

NO	URAIAN PEKERJAAN	KUANTITAS		MERK	TOTAL	
		JML	SATUAN			
	Naration / text indonesia version					
	2. Modul CBT : Panduan Praktikum "Ship Stability" (Tutorial) <u>Content Multimedia :</u> Animation Cathegory 2D & 3D Web Based Size 1366 x 1768 pixel Naration / text indonesia version	1	Lot	SS ARI SIMULATION	Rp	260,000,000
	3. PC Set with UPS 650 VA - Core I7, RAM Minimal 8Gb, HDD Minimal 1TB, Monitor Minimal 24" LED, Win 8, DVD RW, VGA Minimal 1GB, Wireless Keyboard, Wireless Mouse - UPS 650 VA	6	Set	HP	Rp	135,000,000
	4. Computer System for Instructure with UPS 650 VA - Core I7, RAM Minimal 8Gb, HDD Minimal 1TB, Monitor Minimal 24" LED, Win 8, DVD RW, VGA Minimal 1GB, Wireless Keyboard, Wireless Mouse - UPS 650 VA	1	Unit	HP	Rp	22,500,000
	5. Multimedia projector with Motorized Screen <u>Spesifikasi :</u> WXGA (1280 x 800) 3000 Lumens ANSI, 1,7 Kg 3 LCD Technology Screen, 120" wall mounted, motorized	1	Set	EPSON	Rp	30,000,000
SUBTOTAL B					Rp	4,097,086,800
C	KELISTRIKAN, JARINGAN DAN RENOVASI					
27	INTEGRASI, KELISTRIKAN, JARINGAN & RENOVASI					
	- Integrasi Bridge, Tug and Ship Stability	1	Lot	ARI SIMULATION	Rp	381,103,600
	- UPS 10 KVA	3	Unit	APC	Rp	294,840,000
	- Kelistrikan Instalasi dan Panel Listrik ke dalam gedung	1	Lot	CUSTOM	Rp	221,150,000
	- Lokal Power Network Distribution	1	Lot	CUSTOM	Rp	194,535,000
	- Penyekatan ruangan, Mockup & Console	1	Set	SELF MADE	Rp	666,000,000
	- Mock up Bridge & Tug					
	- Console Bridge & Tug					
	- Console Ship Stability					
	- CBT Console					
	- AC 1 PK	3	Unit	Daikin	Rp	28,800,000
	- AC 2 PK	4	Unit	Daikin	Rp	62,400,000
SUBTOTAL C					Rp	1,848,828,600
TOTAL A+B+C					Rp	20,286,947,000
PPN 10%					Rp	2,028,694,700
GRAND TOTAL					Rp	22,315,641,700

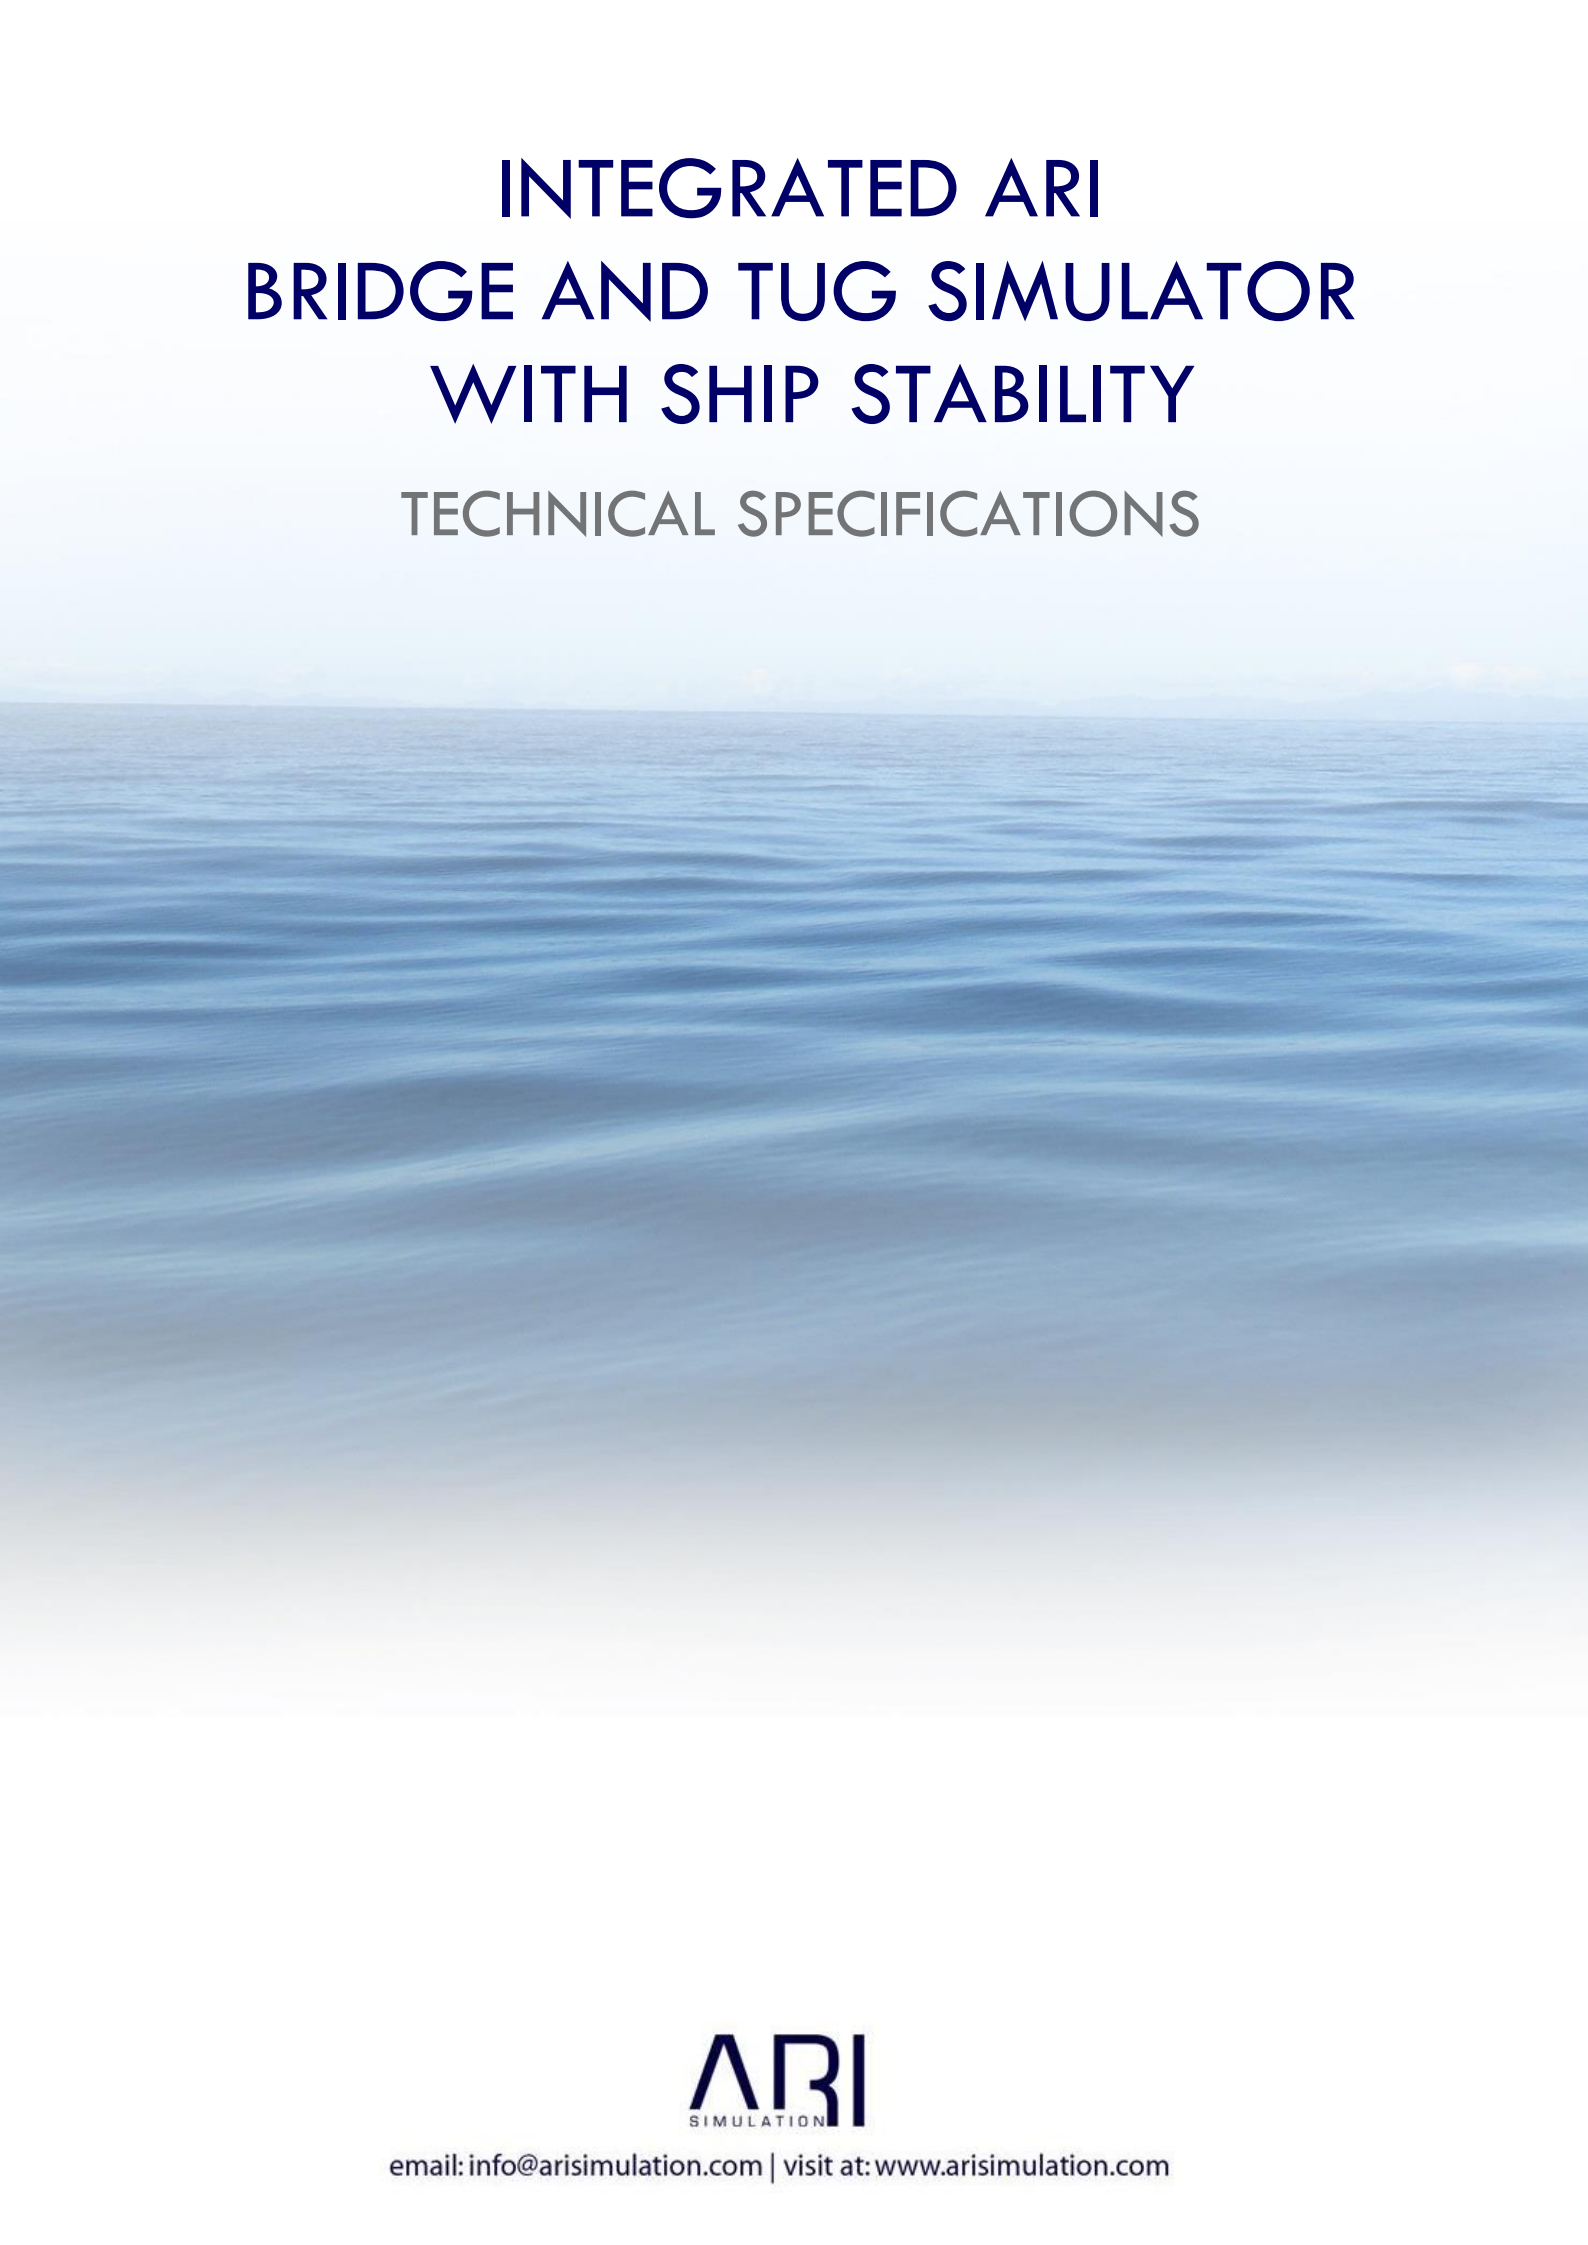

INTEGRATED ARI BRIDGE AND TUG SIMULATOR WITH SHIP STABILITY

TECHNICAL SPECIFICATIONS



email: info@arisimulation.com | visit at: www.arisimulation.com

Document Description	:	Technical Specifications - ARI Bridge & Tug Simulator
Document Submitted By	:	ARI Simulation B-1, Hauz Khas, New Delhi – 110016 India
	:	Unit # 9 14320 Saratoga – Sunnyvale Road, Saratoga, CA 95070, USA
	:	Representative Office 8-10-10 Arinodai, Kita-ku Kobe-city, 651-1321, 0 Japan
Document Id	:	MAR-2016-708/SK
Version	:	1.0

CONTENTS

ABOUT ARI	3
ARI BRIDGE SIMULATOR.....	4
TUG HANDLING SIMULATOR FEATURES	51
BRIDGE EQUIPMENT	54
CERTIFICATION AND APPROVALS.....	69

All computer generated images are indicative and for the purposes of illustration only.

ABOUT ARI

ARI Simulation is a leading global provider of simulation products and virtual reality training solutions across a broad range of industries including marine, offshore, E&P, construction and defence. Our offshore products include simulators for drilling rigs, offshore cranes, offshore vessel handling, dynamic positioning, anchor handling, subsea support, ROVs and more.

ARI's Marine and Offshore Simulation products are certified by DNV-GL to the highest Class A Standard.

ARI's range of simulators extends from desktop PC & kit based personal trainers and multipurpose trainers to full mission solutions in Ship Handling, Marine Communications, Liquid Cargo Handling, Propulsion and Power Management, Integrated Offshore Operations, Advanced Crane Handling (in both ship and shore environments) and Oil Exploration & Drilling Operations.

Besides its proven strengths in simulating processes and control systems and creating powerful real time visualizations, customization is a key strength at ARI. ARI offers customized, immersive and interactive virtual worlds to its clients, backed with a guarantee of reliable and comprehensive post installation support.

ARI Simulation has operations in US, India and Japan and representative offices across the globe.



ARI BRIDGE SIMULATOR

PHYSICAL REALISM


- Equipment and consoles are installed, mounted, and arranged in a ship-like manner.
- Controls for propulsion plant operations are provided. There are indicators for shaft(s) revolutions and pitch of propeller(s) along with controls for propeller(s) and thruster(s).
- Steering console, including facilities for hand steering and automatic steering with controls for switch over; indicators of rudder angle and rate of turn.
- Steering compass repeater with an accuracy of better than 1 degree.
- Simulated Radars in both 10 cm and 3 cm options.
- GPS, echo-sounder and speed log displays are available.
- Indication of relative wind direction and force is provided.
- Facility for generating “sound signal” according to the “Rules of the road” is provided.
- Facility for operation of Navigation Lights is provided.
- Control for General alarm is provided.
- Alarm Panel for machinery failure is provided.



Full mission Ship Manoeuvring Simulator – Physical realism

BEHAVIOURAL REALISM

- The model realistically simulates own ship dynamics in 6 degrees of freedom.
- The model realistically simulates own ship hydrodynamics in open water conditions.
- The radar simulation equipment is capable of demonstrating weather effects, shadow sectors, spurious echoes and other propagation effects, and generates coastlines, navigational buoys and search and rescue transponders
- The ARPA simulation equipment incorporates the facilities for:
 - Manual and automatic target acquisition
 - Past track information
 - Use of exclusion sector
 - Vector/graphic time-scale and data display
 - Trial manoeuvres
- The simulator provides own ship engine sound, reflecting the power output.
- The simulation includes the depth according to charts used.
- The simulator provides capabilities for realistically conduct anchoring and mooring operations.

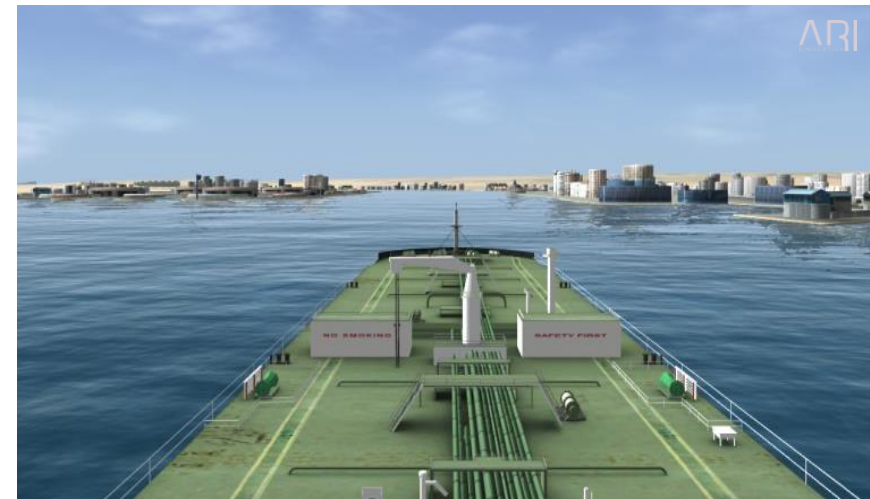

Ship in Restricted waters (Suez Canal)

TYPE OF TRAINING

Training Levels

The ARI Ship Manoeuvring Simulator can be used for training at various levels including:

- Basic or familiarization training
- Operational training
- Advanced training at the management level

Navigation Training

It can be used for conducting the following kinds of navigational training that includes but is not limited to:

- Navigation in open waters/Deep Sea Navigation
- Navigation in shallow waters
- Navigation in restricted waterways and channels
- Coastal navigation
- Navigation in high traffic density situations
- Approaching harbours
- Approaching mooring positions
- Berthing
- Passage planning and execution
- Collision regulations (COLREGS)



Approaching berth




Berthing/Mooring

- Radar & ARPA operations
- Radar operations under conditions of blind navigation
- Electronic navigation systems
- Use of ECDIS in conjunction with Radar and other navigational aids
- Search & rescue
- Bridge watch keeping procedures
- Mooring
- Anchoring

Manoeuvring Training

The ARI Ship Manoeuvring Simulator is suitable for use in Manoeuvring training including but not limited to:

- Free Manoeuvring
- Berthing and un-berthing
- Manoeuvring using thruster(s)
- Mooring and unmooring
- Manoeuvring using tugs

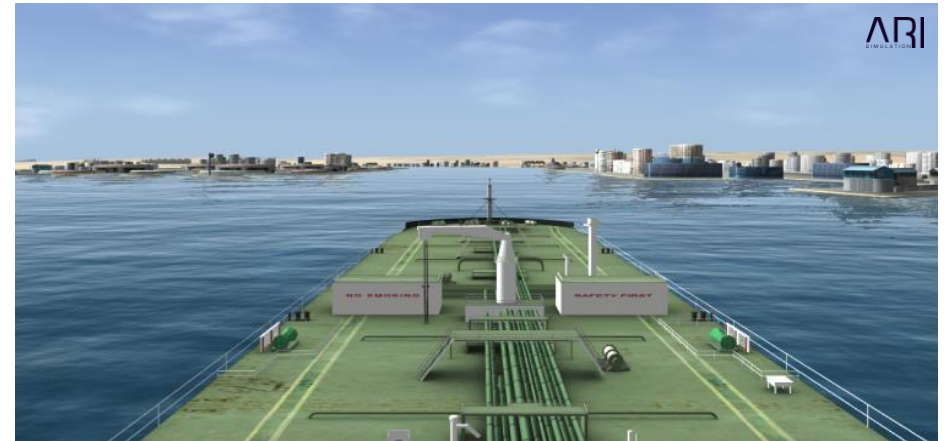

Ship in Restricted waters (Suez Canal)



Use of Tug to assist vessel berthing

Exceptional Environment Navigation Training

The ARI Ship Manoeuvring Simulator is suitable for training use in exceptional environment including but not limited to:

- Night Navigation
- Navigation in poor visibility
- Navigation in heavy rain, strong wind, strong currents
- Navigation in areas of large tidal range



Instructor control for environment

NAVIGATION SIMULATOR COURSES

ARI Navigation simulators can be used to run several kinds of courses including but not limited to:

- Ratings forming part of navigational watch
- Helmsman training
- Ship handling
- Navigating ships in straits and traffic separation schemes with varying traffic density
- Collision avoidance for watch-keeping officers; Rules of the road – practical applications
- Bridge simulator Instructor training
- Radar observation and plotting; use of ARPA
- ECDIS training
- Bridge team training
- Bridge resource management training

INTERNATIONAL COMPLIANCES

The ARI Ship Manoeuvring Simulator can be used to demonstrate the following STCW 2010 competencies

Table A II/1.1	Plan and conduct a passage and determine position
Table A II/1.2	Maintain a safe navigational watch
Table A II/1.3	Use of radar and ARPA to maintain safety of navigation
Table A II/1.4	Use of ECDIS to maintain the safety of navigation
Table A II/1.5	Respond to emergencies
Table A-II/1.6	Respond to a distress signal at sea
Table A-II/1.8	Transmit and receive information by visual signalling
Table A-II/1.9	Manoeuvre the ship
Table A-II/2.1	Plan a voyage and conduct navigation
Table A-II/2.2	Determine position and the accuracy of resultant position fix by any means
Table A-II/2.3	Determine and allow for compass errors
Table A-II/2.4	Co-ordinate search and rescue operations
Table A-II/2.5	Establish watch keeping arrangements and procedures
Table A-II/2.6	Maintain safe navigation through the use of information from navigation equipment and systems to assist command decision-making
Table A-II/2.7	Maintain the safety of navigation through the use of ECDIS and associated navigation systems to assist command decision making
Table A-II/2.10	Manoeuvre and handle a ship in all conditions

INTERNATIONAL COMPLIANCES

Table A-II/2.11	Operate remote controls of propulsion plant and engineering systems and services
Table A-II/3.1	Plan and conduct a coastal passage and determine position
Table A-II/3.2	Maintain a safe navigational watch
Table A-II/3.3	Respond to emergencies
Table A-II/3.4	Respond to a distress signal at sea
Table A-II/3.5	Manoeuvre the ship and operate small ship power plants
Table A-II/5.2	Contribute to berthing, anchoring and other mooring operations

In addition, the following international standards have been taken into consideration while designing this full mission ship handling simulator

- International Regulations for Preventing Collisions at Sea, 1972
- International Convention on the Safety of Life at Sea, 1974
- International Convention on Standards for Training, Certification and Watch keeping, 1978, 1995 with 2010 amendments
- Automatic Radar Plotting Aids Course. REGULATIONS AND GUIDE (Department of Trade, London 1981)
- IMO Resolution A. 477(12). Performance standards for radar equipment. Adopted on 19 November 1981
- IMO Resolution A. 482(12)
- IMO Resolution A. 483(12)
- IMO Resolution A. 823(19). Performance standards for automatic radar plotting aids. Adopted on 23 November 1995
- IMO Resolution MSC 64 (67). Recommendation on performance standards for radar equipment. Adopted on 04 December 1996
- IMO Model Course 1.07
- IMO Model Course 1.08
- IMO Model Course 1.09
- IMO Model Course 1.22
- IMO Model Course 1.27

ARI SHIP LIBRARY – SAMPLE IMAGES OF OWN SHIPS AND TARGET SHIPS



Fishing Vessel



Very Large Crude Carriers (VLCC)



Offshore Supply Vessel



Harbour Tug



ULCC



VLCC



Product Carrier



LNG Tanker – Q Flex



LPG Tanker



Chemical Tanker



Container vessel



Bulk Carrier



Suez Max Bulk Carrier



Passenger Vessel




Trawler

SHIP MODELS AND BEHAVIOUR

- The simulator is provided with different types of own ships.
- The simulator is able to present multiple target ships at the same time, where the instructor is able to program voyage routes for each target ship individually.
- The target ships are equipped with navigational lights, shapes and sound signals, according to “Rules of the road”.
- The model realistically simulates own ship dynamics in 6 degrees of freedom.
- The model realistically simulates own ship hydrodynamics in open water conditions, including the effects of wind forces, wave forces, tidal stream and currents.
- The simulation includes the depth according to charts used.
- The model realistically simulates own ship hydrodynamics in restricted water-ways.

Own Ship Simulation

- Modelling in 6 degrees of freedom – yaw, roll, pitch, surge, heave, sway
- Propellers
- Rudders
- Thrusters
- Autopilot functions
- Wind effect
- Tides
- Sea wave disturbance
- Currents

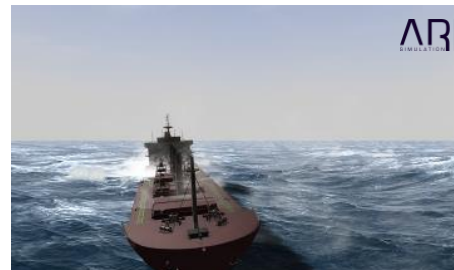

Traffic Ship Simulation

- Proceed under pre-programmed instructions
- Control parameters can be altered in real time by Instructor
- Instructor can introduce and remove traffic ships from scenario
- Similar to own ships – operate in 6 DOF

Others

- SART activation
- AIS Transponder deactivation
- Man overboard
- Sailboats
- Liferaft etc.



Ship to Ship interaction

MODEL CUSTOMISATION

ARI can customize ship models according to client requirements based on client's own ship data.



Real Vessel




Simulated Vessel

Vessel Modelling


The hydrodynamic vessel model of the simulator provides a high degree of behavioural realism. The model provides results that are accurate, consistent, and predictable under a multitude of combinations of forces, conditions, objects, situations, and user actions.

At the highest level, the vessel model will account for forces and moments arising out of:


- Hydrostatics and Damaged stability conditions
- Hydrodynamics and aerodynamics
- Propulsion - propellers, pods and thrusters
- Control surfaces – rudders and fins
- External forces – environment wind, current, waves, narrow channels, low under keel clearance and conditional forces – e.g., mooring ropes, anchors, chains, wires, fenders, berths and quays, etc.

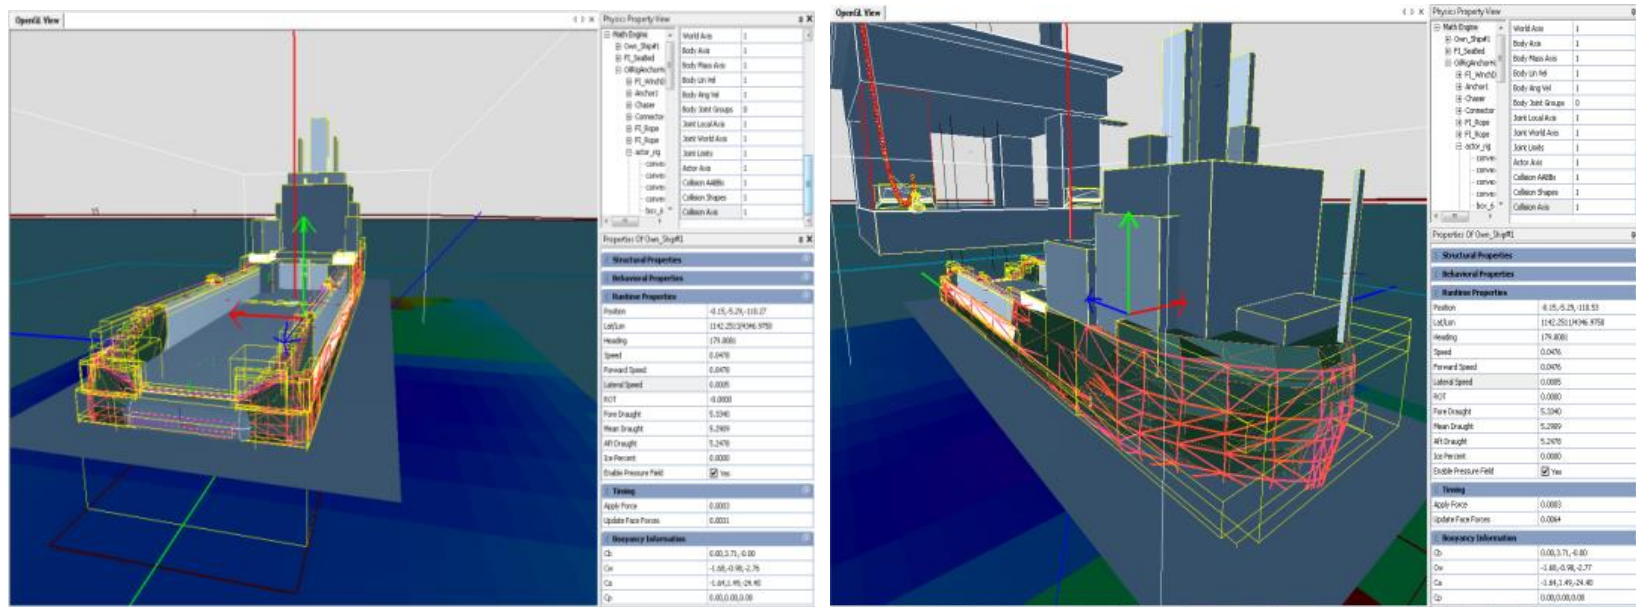

Sample images from Simulation Server

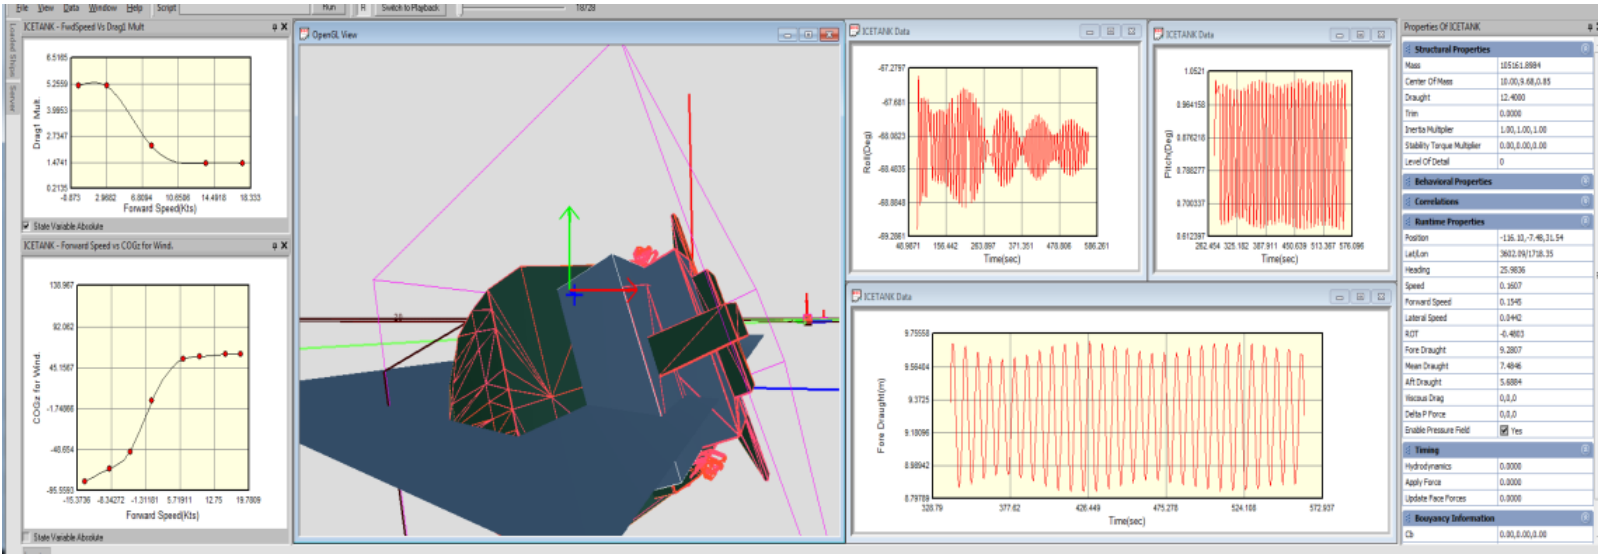

Snapshots of computational view

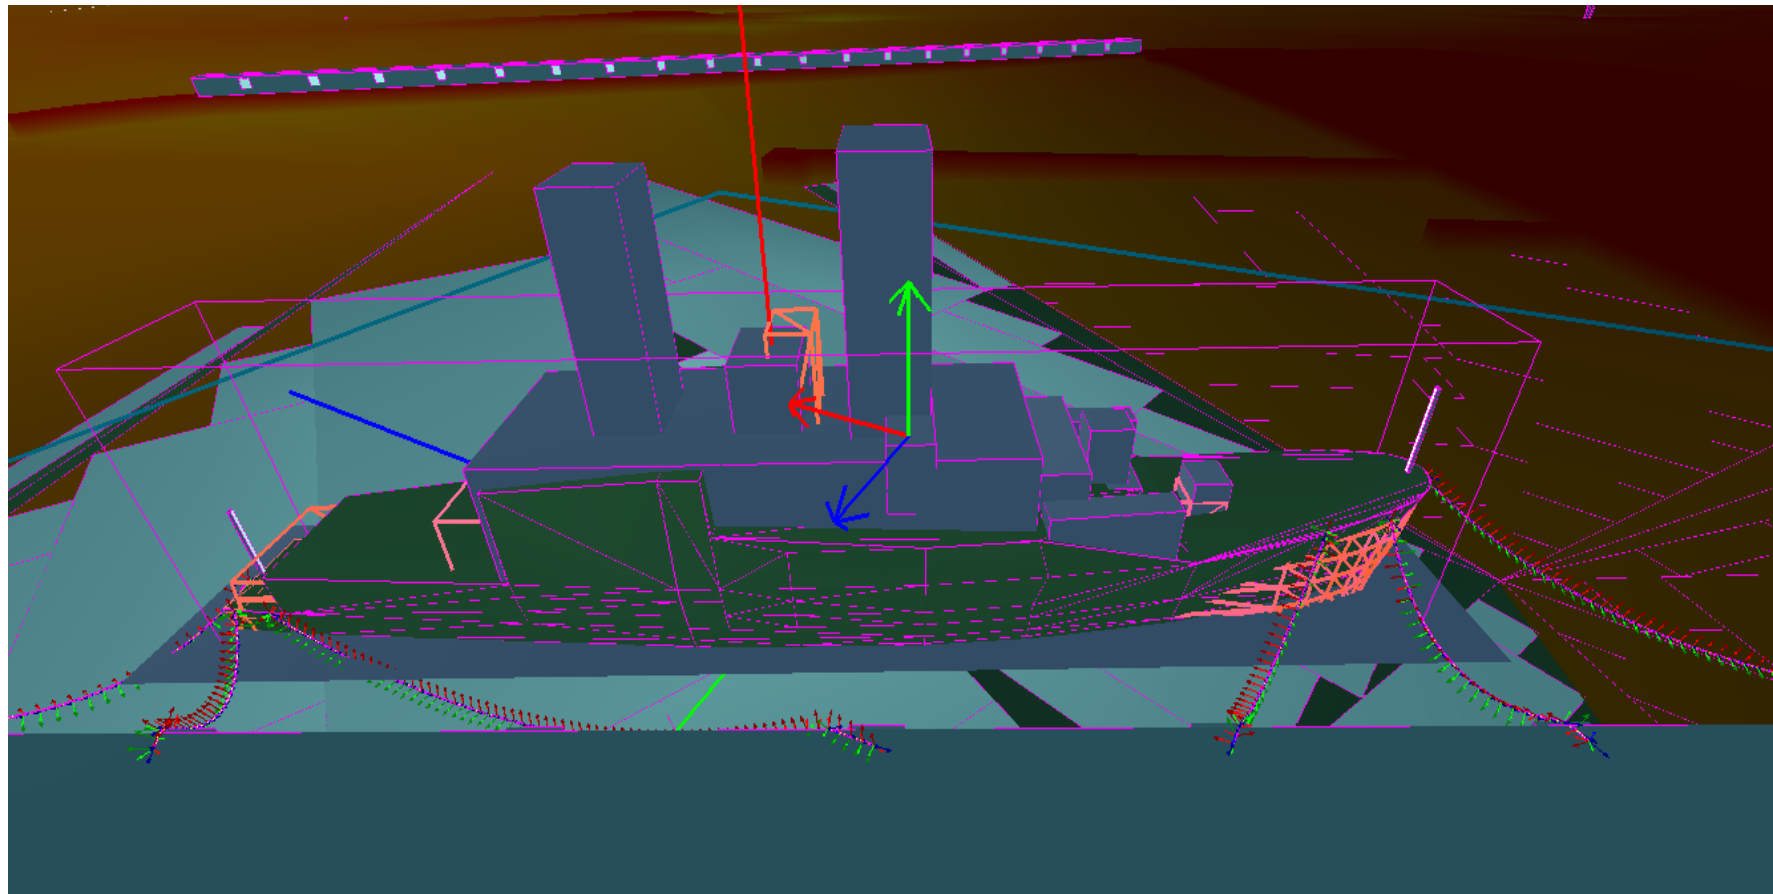


Sample computational views showing modeled entities and surfaces


Results from Simulator for a Turn test performed on Tanker (260 K DWT)




Turning Circle

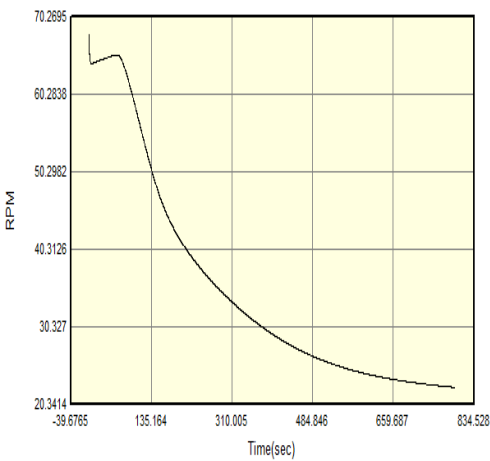

Change of RPM during turn

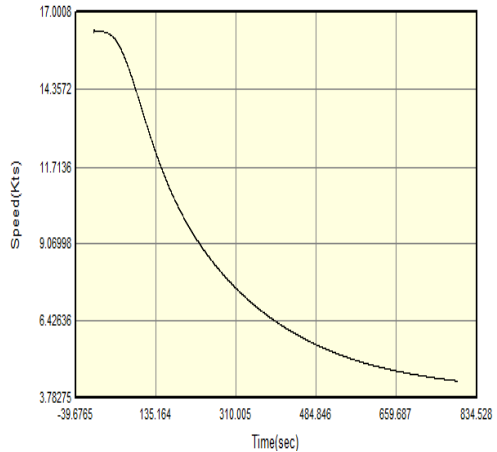


Change of speed during turn

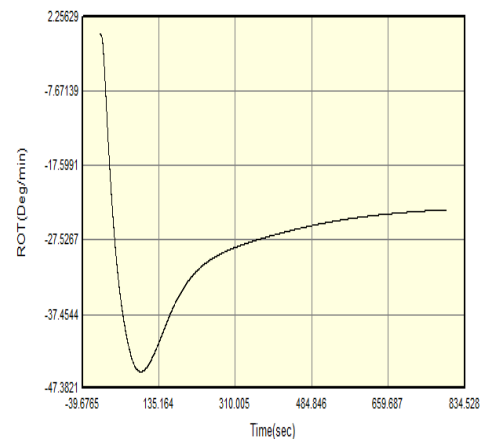


Change of ROT during turn

TURNING ANGLE (deg.)	PORT		STBD	
	Time	Speed	Time	Speed
90.0	159.7	9.1	167.8	8.7
180.0	346.2	5.2	368.1	5.4
270.0	592.1	3.6	613.0	4.4
360.0	870.0	2.6	885.0	4.0

Vessel turn data (from Sea Trials)

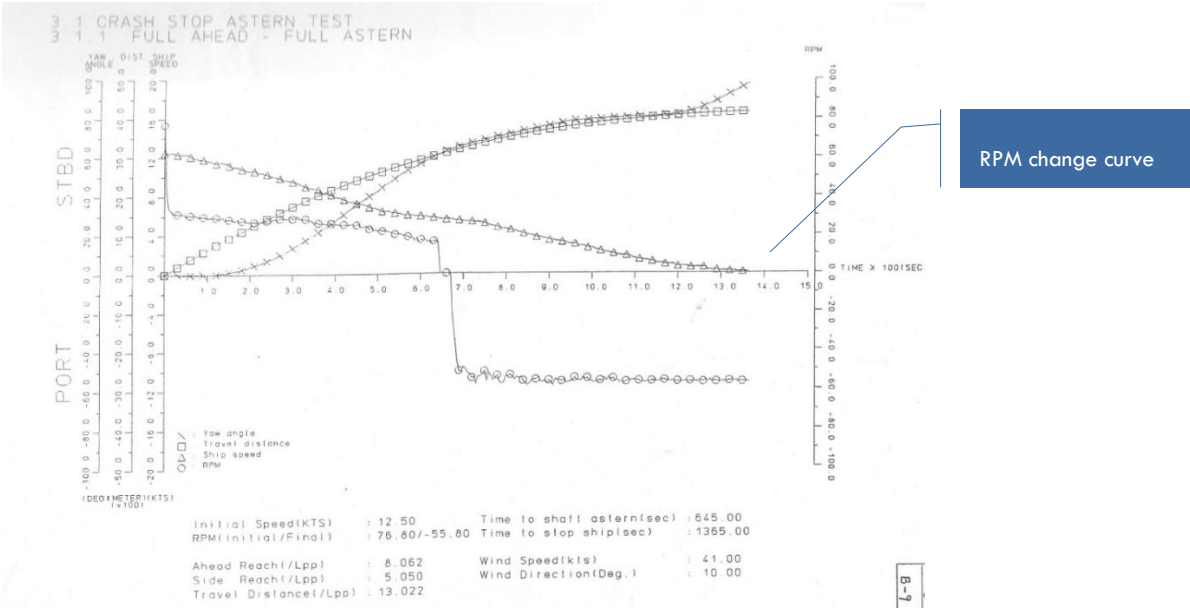


Crash Stop data (from Sea Trials)

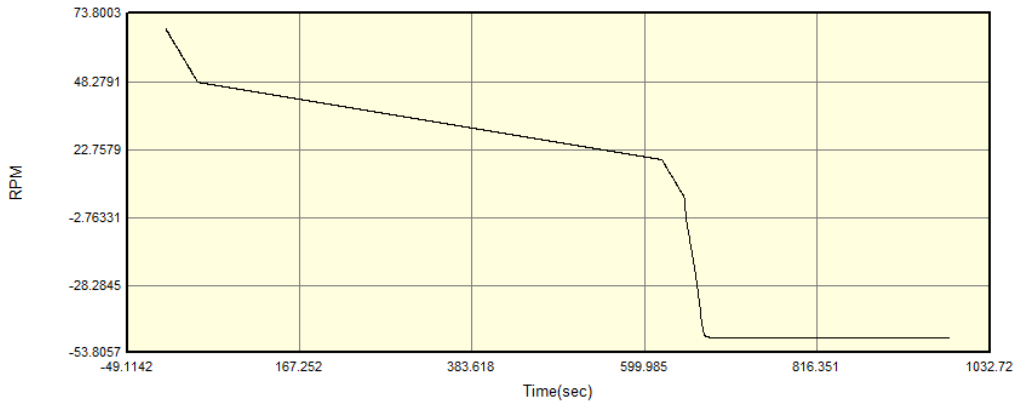


Simulator output of RPM change during Crash stop test for above vessel model


Effect of changes of model Constants

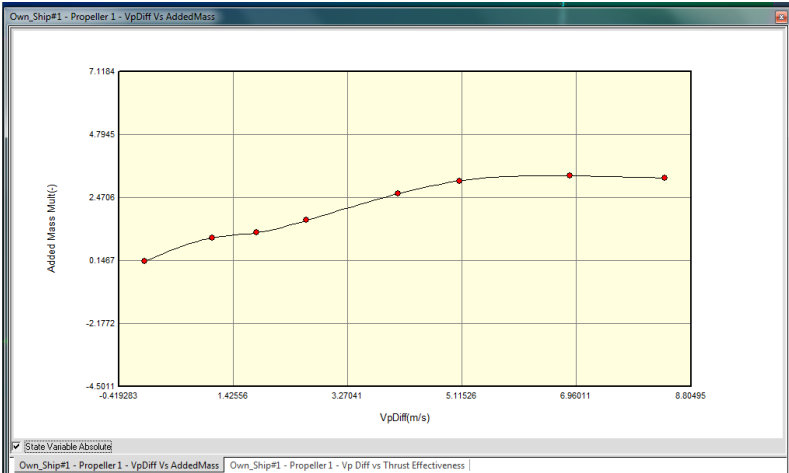


Propeller advance vs. Added mass

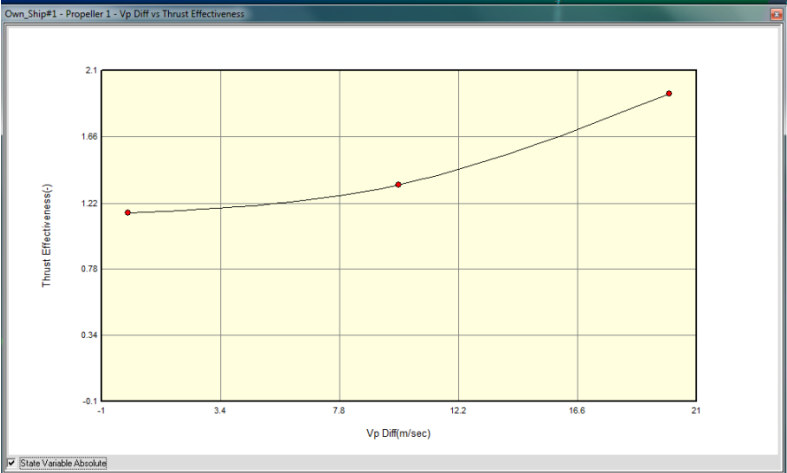

Propeller advance vs. Effective thrust

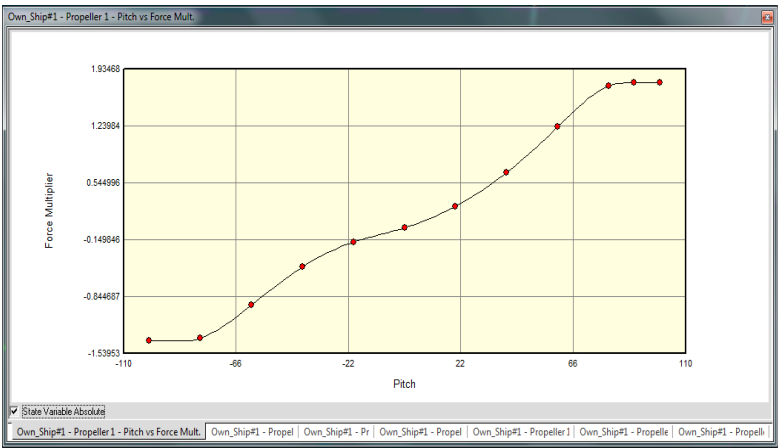

Pitch vs. Transverse force

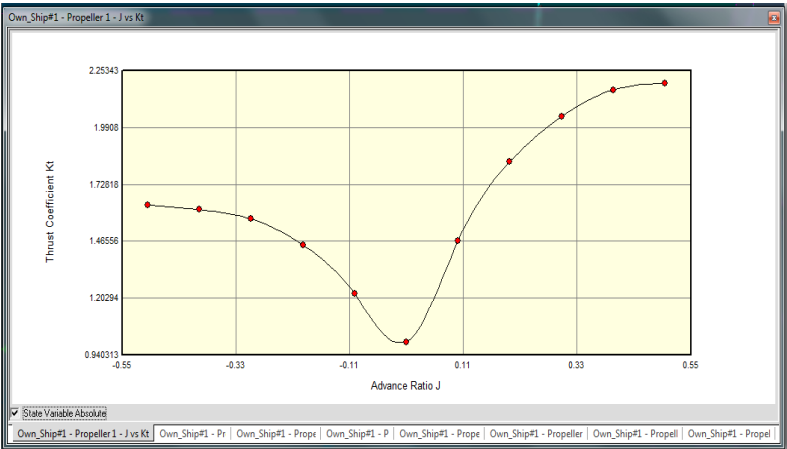

Advance ratio vs. Thrust

SIMULATED EXERCISE AREAS

The ARI port and sea areas library includes a large number of ports and areas. The Exercise Areas library includes a number of navigable area types, including for example:

- Coastal navigation areas
- Approaches to Ports
- High density traffic areas
- Rivers and Canals
- Open sea areas
- Traffic separation schemes
- Narrow channels
- Harbour entrances
- Inner harbours
- Berths
- Anchorages



Singapore harbour



Europort harbour



Bosphorus strait (Turkey)



Gibraltar



Felixstowe



Southampton



Hongkong



Houston



Milford haven




Rio de Janeiro



Map ta Phut



Texas

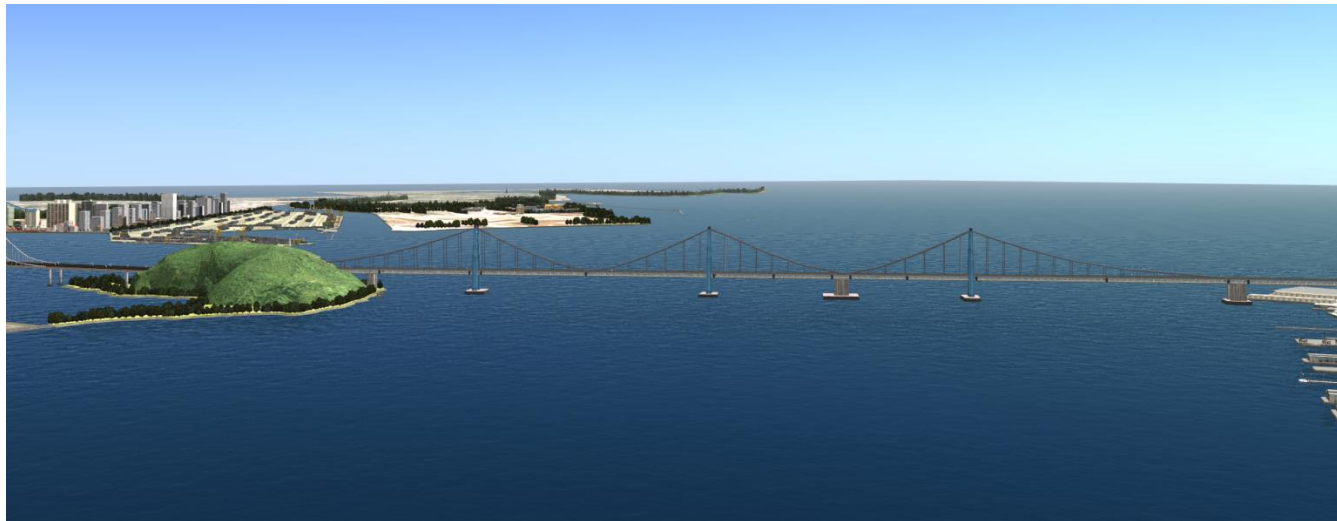

San Francisco


Visualization

The own ships and target vessels are provided with realistic 3 Dimensional bow wave and propeller wash. The propeller wash is directly related to the RPM of the engine selected by the user.

High resolution textured visual scenes of harbours, aids to navigation, and ships contribute to the simulation's realism. These colour visual scenes can be set for day, night, dusk, dawn or other conditions of ambient lighting and include limited visibility conditions.

The primary elements of the visualisation scenario include the following:

- Own ship deck view as seen from the 'Bridge Portholes'
- Own ship views (wings, stern etc.) as seen from the Bridge using panning function
- Water surface
 - o Variable appearance with time of day, wind speed (and direction), waves
 - o Reflection of sun in water
 - o Variable colour
 - o Wash and wake from own vessel and targets
- Sky - Variable appearance with cloud cover, time of day
- Target vessels
 - o Multiple types / size
 - o Underway, anchored, making way
 - o Day shapes, signals, flags
 - o Rotating radar scanners
- Navigation objects
 - o Buoys, beacons, lighthouses

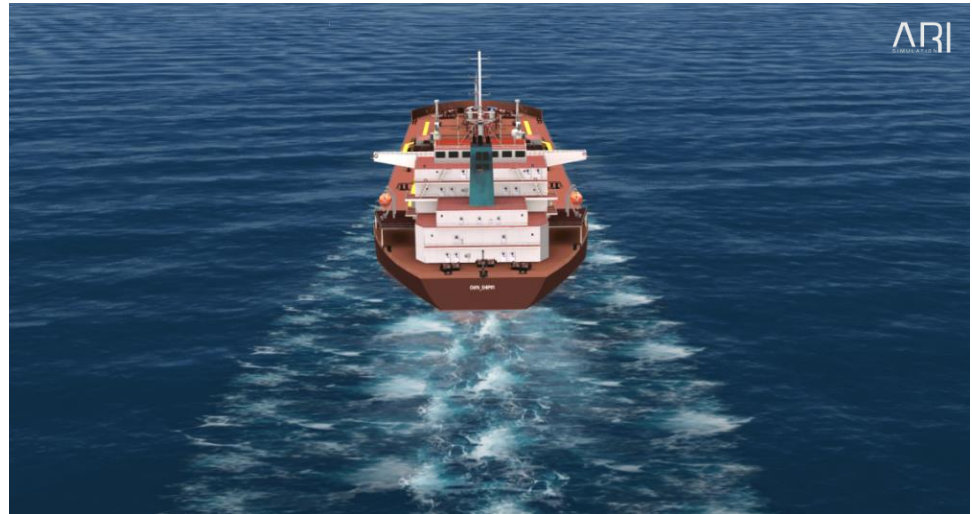


Propeller wash



Beacon

- Land / Shore
 - Variable landmass appearance
 - Vegetation
 - Cultural objects – buildings, roads, bridges, towers, chimneys
 - Conspicuous objects (recognisable structures / buildings)
- Lights
 - Navigation lights on own vessel and target vessels
 - Buoys, beacons, lighthouses
 - Cultural lights ashore
 - Deck lights on anchored vessels
 - Signal lights (NUC, deep draft vessel etc.)
 - Steering light
 - Shapes / Day signals / Flags - Buoys, Target vessels
- Variable visibility – rain, snow, mist fog
- Wipers
- Variable ambient lighting – day, dusk, dawn, night
- Smoke, Fire, oil spill
- 3D depth perception of objects
- Varied colours and textures of objects
- Shadows

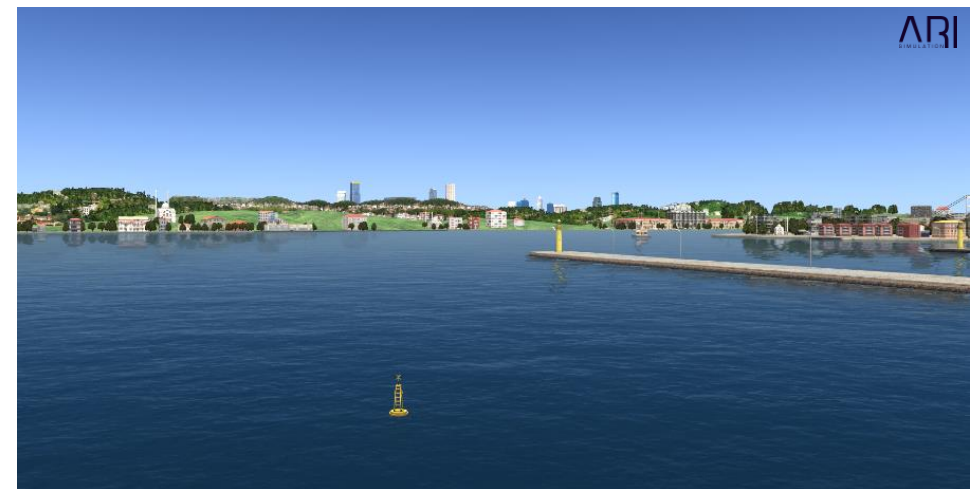
*Cultural objects**Buoys, Lighthouses*




Reflection of sun in water



Restricted visibility

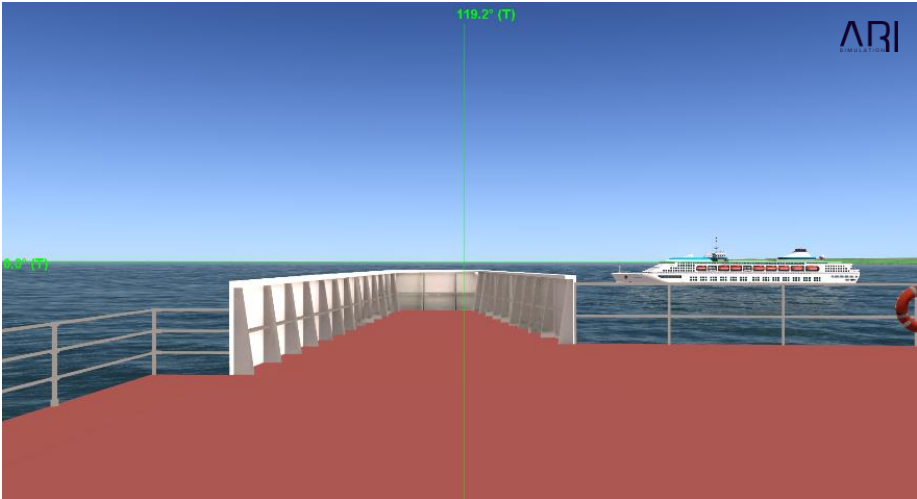

Bearing view

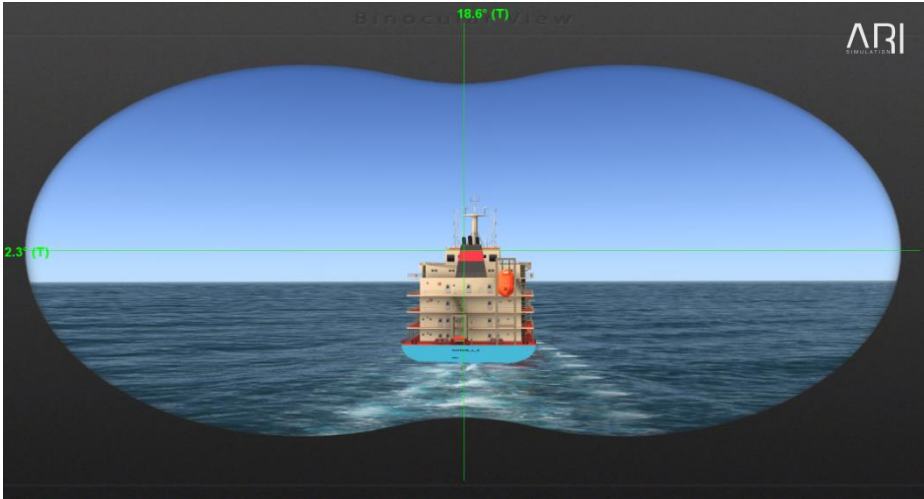

Binocular view




Variable colours of water surface



Day Signals



Day time visualisation

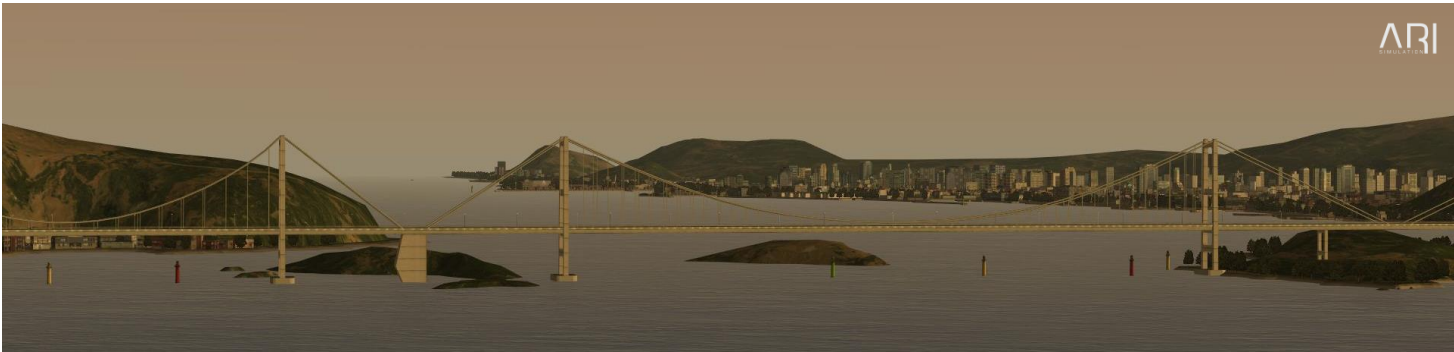

Dusk/dawn visualisation



Night time Visualisation

INSTRUCTOR CAPABILITIES

The Instructor Station is a PC based set up which allows control and monitoring of the exercise.

The Instructor station includes:


- Instructor & server applications
- Instructor Visuals
- Instructor GMDSS¹

Instructor can Launch, Pause, Resume exercises including replays. Some of the available features for control and monitoring during exercises include:

- Control and monitoring of the available environmental conditions such as current, visibility, wind, swell, precipitation, clouds etc.
- Easy monitoring of the own-ship parameters and student actions.
- Start, stop, pause, continue, and restart of exercises.
- Control of the target ship shapes, signals, lights, etc.
- Control for target ships' course, speed, etc.
- Creating of hazardous and challenging conditions for trainee by fault injection in navigational equipment and machineries.




Instructor Station

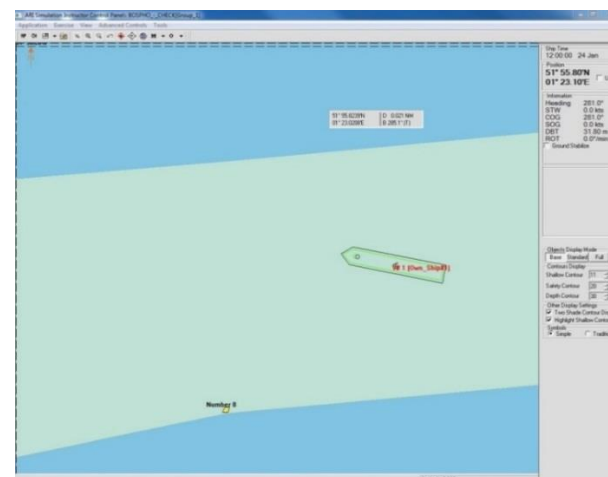

Instructor chart interface

¹ Configuration dependent

LIGHTS AND SHAPES CONTROL – TARGET VESSELS

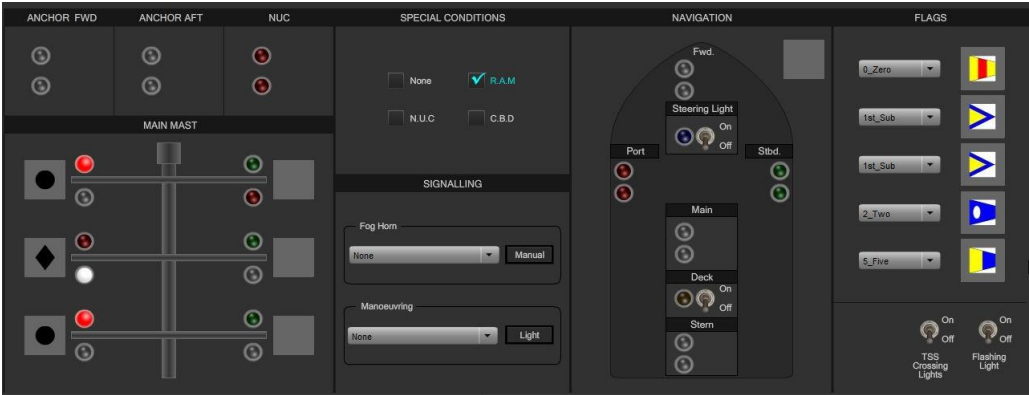

Instructor Control of Lights and Shapes for Target Vessels



Day Shapes



Flags



Navigation Lights on target vessel

ARI SIMULATION

Vessels **Environment** Nav. Equipment Failure Machinery Failure Lights Tugs AIS < >

ID / Name	Type	Dimensions(LOA,Bm,d(Mn))	Max Speed/RPM	Position	Heading(True)	SOG(k)	Steering Mode	Status	CPA/TCPA	Set Course	MMSI	IMO Number
V# 1 (Own_Ship#1)	Tanker 2	274.00m,48.00m,16.00m	14.7kts / 87	40° 59.99'N 28° 59.70'E	359.8°	0.88	Hand	Makingway		0°	636009820	9009138
V# 2 (Tanker 1)	Tanker 1	240.00m,41.00m,11.00m	13.9kts / 105	40° 58.32'N 28° 58.47'E	000.0°	0.00	Hand	Underway	0.93NM/-113.5min	0°	636011454	9225342

SELECTED SHIP ENVIRONMENT

CURRENT **WIND**

Rate Direction Rate Direction

Disable Tidal Current Tide Settings Zones Disable Sea Waves Sea Color Enable Birds Wind Gust

SWELL 1 **CURRENT** **VISIBILITY**

Height (mtrs.) Period (sec.) Current Rate (kts) Visibility

SWELL 2 **WIND - BF SCALE** **CHANGE RATE** **DAY, TIME & MOON PHASES**

Height (mtrs.) Period (sec.) Wind Scale Change Rate (Min) Day/Time/Moon

PRECIPITATION & THUNDER **CLOUD SETTINGS**

Rain Drizzle Slight Moderate Heavy Thunder Snow Slight Moderate Heavy Clouds Sky Cover

ARI Instructor Graphical User Interface

ENVIRONMENTAL CONTROL

Tide

TIDE SETTINGS

TIME (HH:MM)	TIDAL HEIGHT(m)	CURRENT SPEED (kts)	CURRENT DIRECTION
LL 3:5 - HR + - MIN +	0 0 1 2 3 4 5 6 7 8 9 10	0 0 1 2 3 4 5 6 7 8 9 10	0°
LH 9:5 - HR + - MIN +	0.1 0 1 2 3 4 5 6 7 8 9 10	0 0 1 2 3 4 5 6 7 8 9 10	0°
HL 15:5 - HR + - MIN +	0 0 1 2 3 4 5 6 7 8 9 10	0 0 1 2 3 4 5 6 7 8 9 10	0°
HH 21:5 - HR + - MIN +	0.1 0 1 2 3 4 5 6 7 8 9 10	0 0 1 2 3 4 5 6 7 8 9 10	0°

Apply

Instructor control of Tidal times and heights with tidal current



Low tide



High Tide

Visual effects of tidal height variation


Wind speed and Direction



Instructor control of Wind direction and speed, with Swell



Wind force "0" – Calm

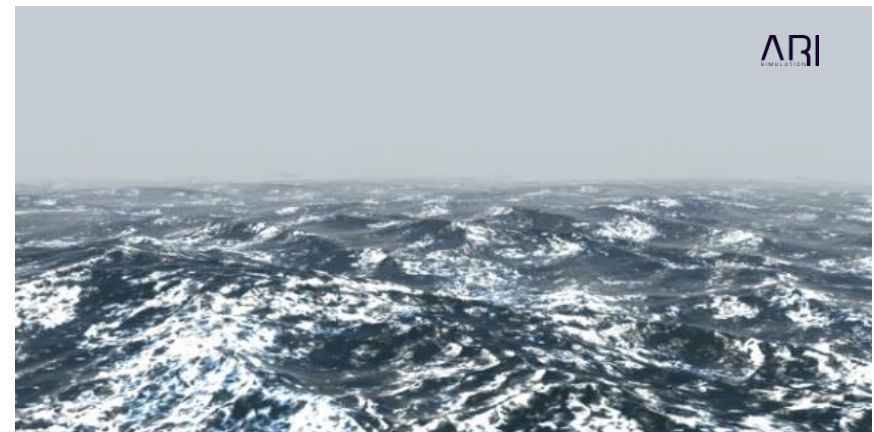

Wind force "9" – Strong Gale

Visibility




Instructor control of visibility




Clear Visibility




Reduced visibility condition – 3 NM

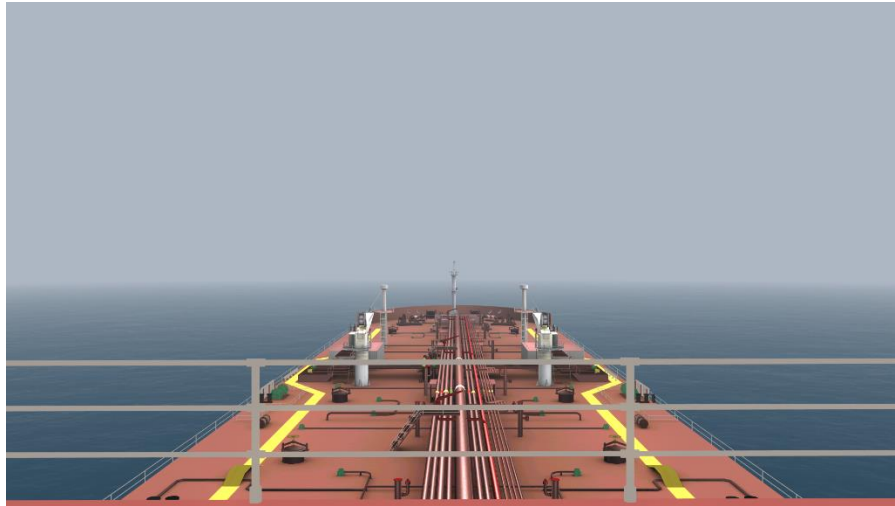

Reduced visibility condition – 0.5 NM

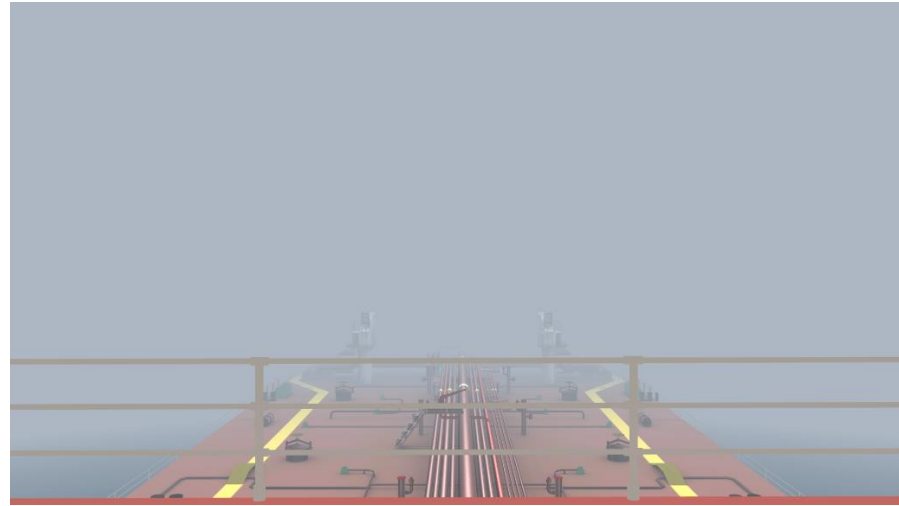


Reduced visibility condition – 100 Metres

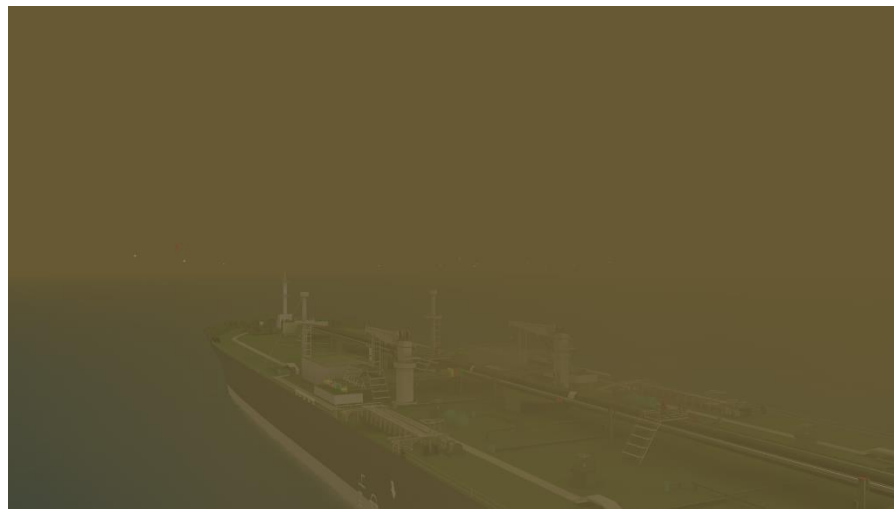


Reduced visibility condition – Dust Storm

Clouds

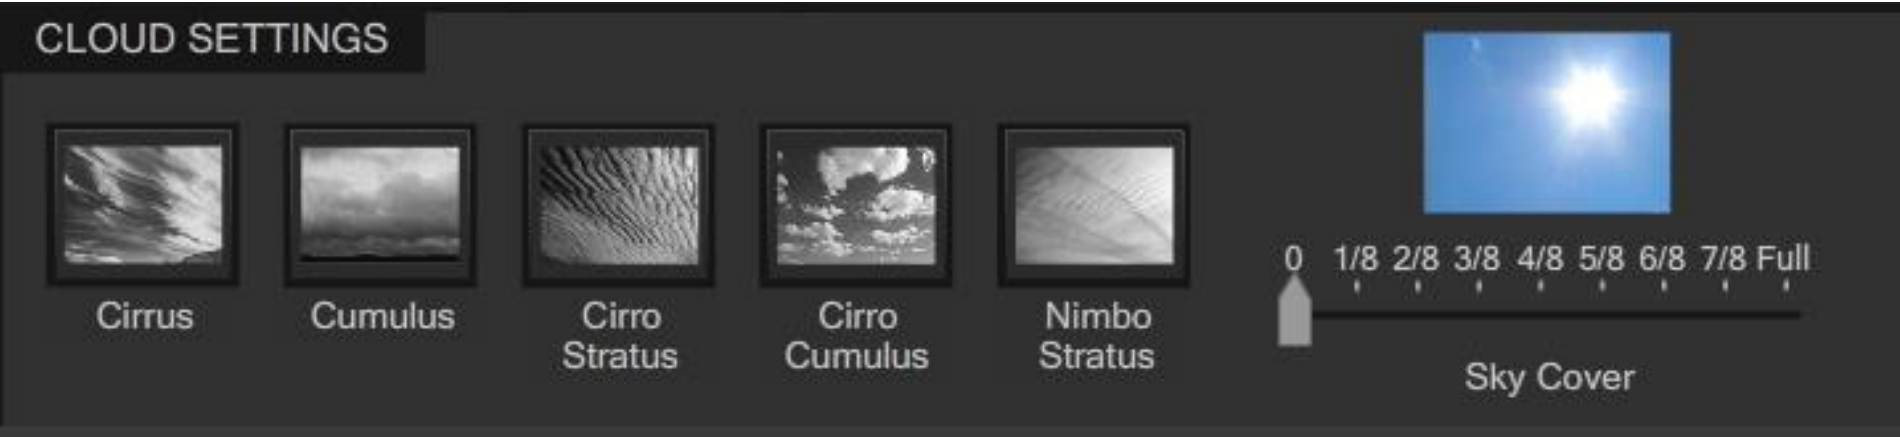

Instructor control of cloud types and cover

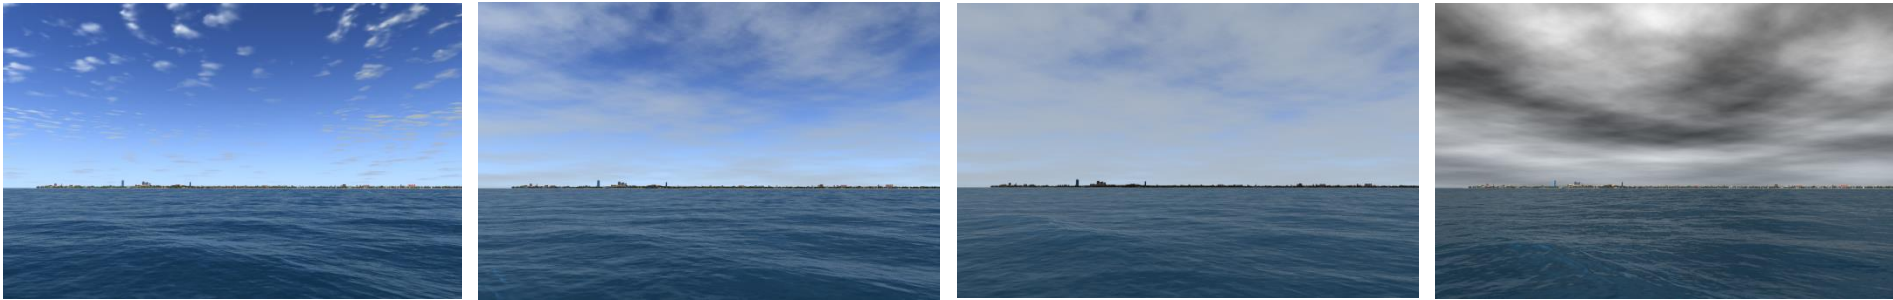

Various Cloud types and Variable sky cover

Precipitation and Thunder



Instructor Control for Precipitation (Rain and Snow) and Thunder




Lightning and rain

Vessel Movement




Sample images from simulator showing vessel movement in heavy seas


FAULTS AND MALFUNCTIONS

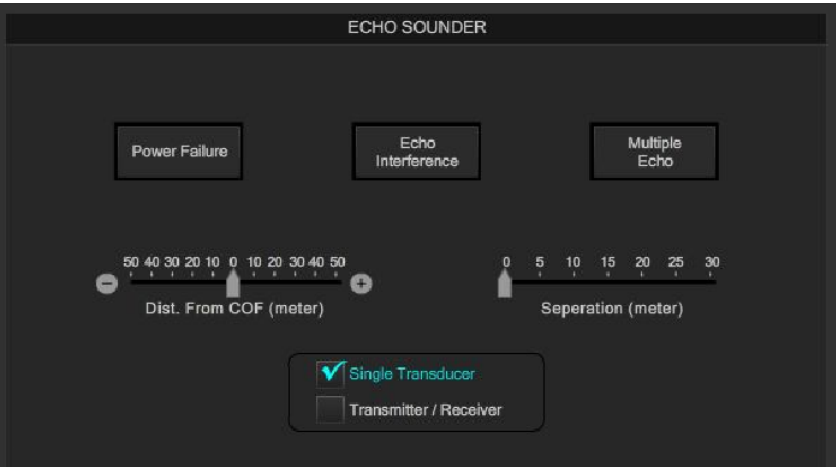


Errors of echo Sounder

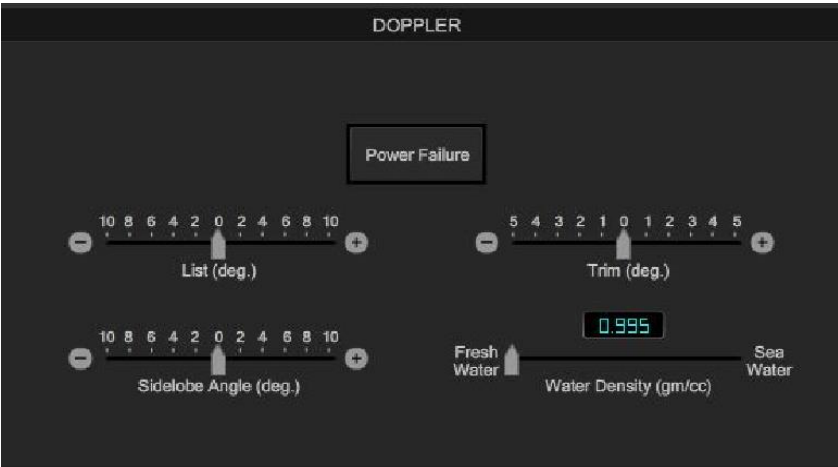

Errors and Malfunctions of Doppler speed log

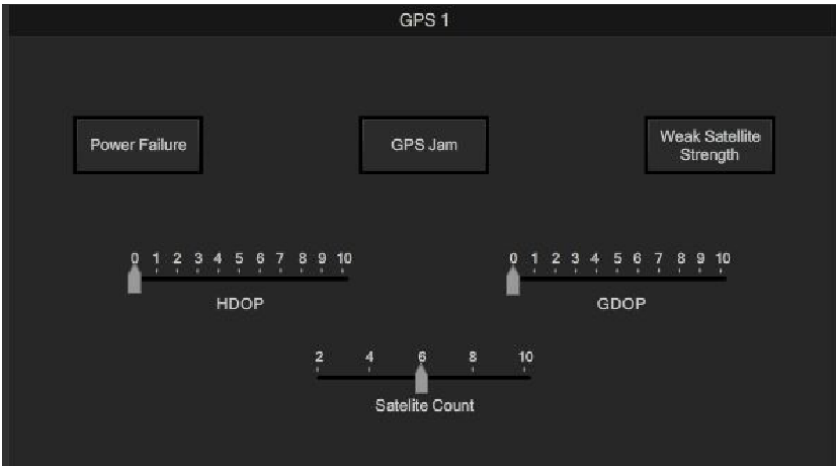


Errors of GPS / DGPS

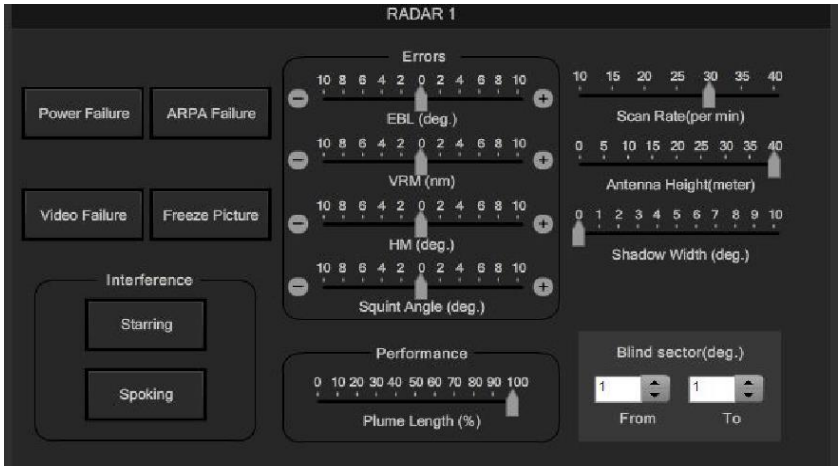


Various errors of Radar and ARPA

TUG CONTROL AND TOWING

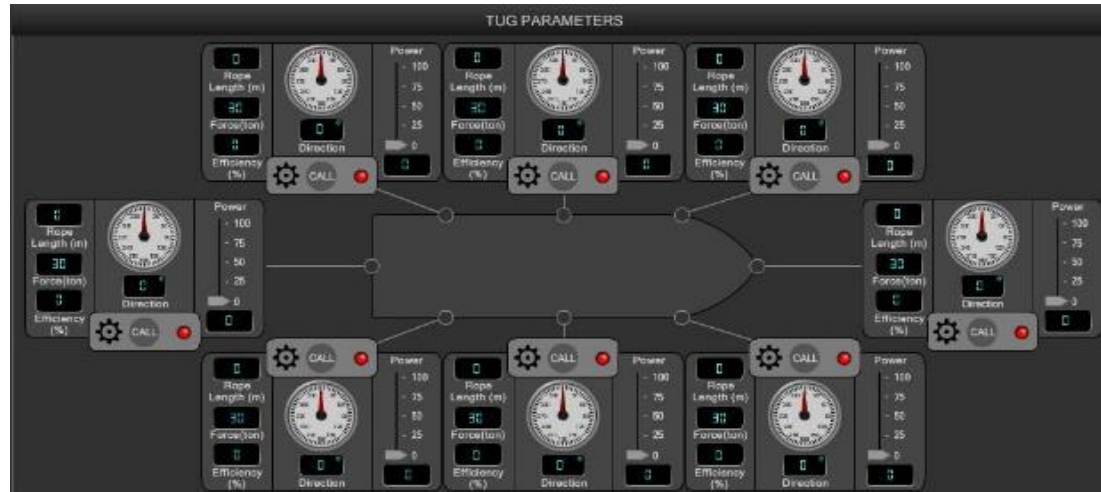

Instructor control of tug deployment and operation

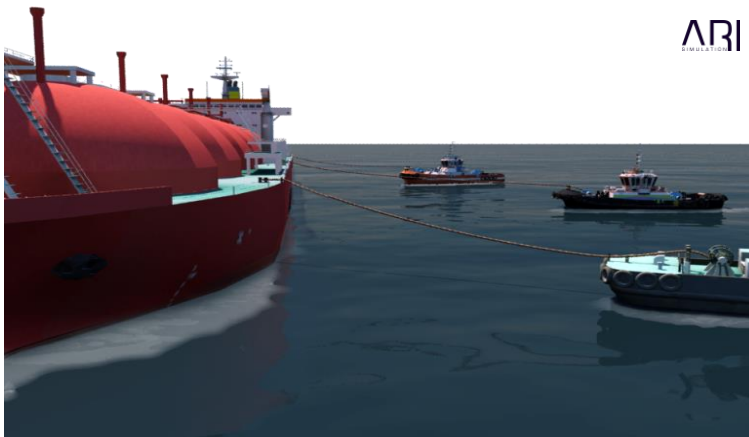


Sample images of Tug(s) in use for vessel manoeuvring assist

DISTRESS AND EMERGENCY CONDITIONS

These include, for example:


- Fire on selected target vessel (different locations on vessel)
- Excessive List / Trim condition on target vessel (to simulate a possible capsizing vessel)
- Oil spill from selected target vessel
- Orange dye marker from selected target vessel
- Distress / Safety signals from selected target vessel – these include: Parachute flare, Buoyant smoke flare, Red Star, White Star, and others.

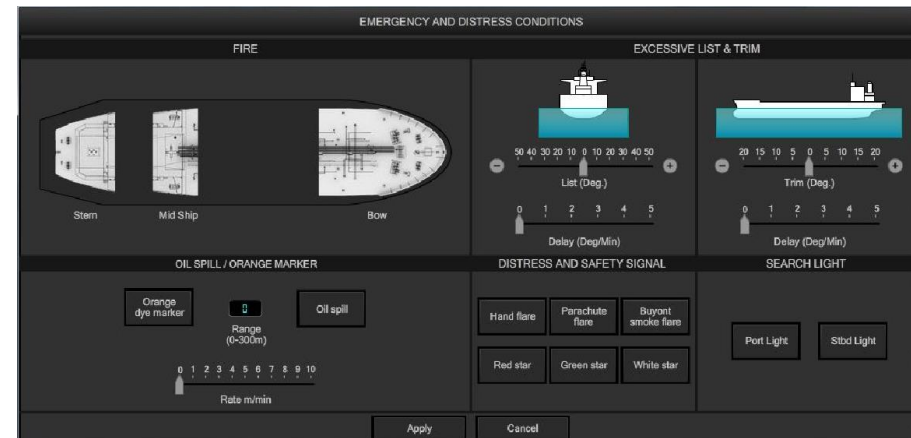

Instructor interface for creating several distress and emergency conditions.



Fire on board Target vessel

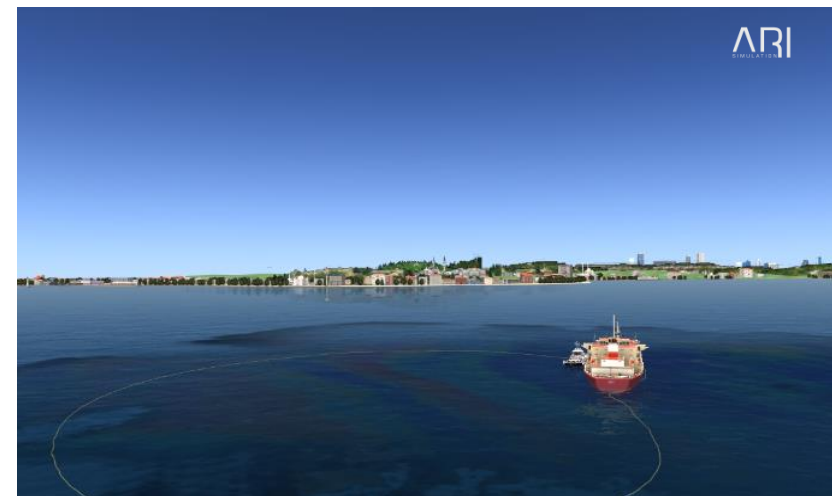


Oil Spill



Excessive list on target vessel



Excessive Trim on target vessel

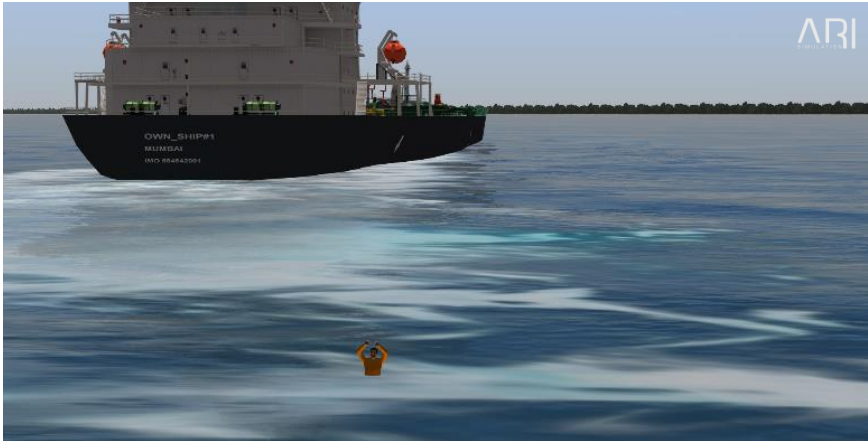

Man Over-board



Target ship reflection



Distress Signals from target vessel – Green star

TUG HANDLING SIMULATOR FEATURES

SPECIFIC FEATURES

Own Ship (Tug)

- ASD Tug

Azimuth thruster controls will be provided with ARI Tug Handling Simulator²

(Other Tug models are available in the ARI own tug library).



Azimuth thruster controller – Lilas or similar

² If customized tug handling controls (Aquamaster or similar) are required, these can be procured by buyer.

Target Ship

3 target ships of different sizes / types from the ARI Target vessels library will be provided in the simulator.



Ship Models

Exercise Areas

One exercise area will be provided.



Sample Exercise Area

FUNCTIONAL FEATURES

- Ship Assisting work
- Escort work
- High fidelity hydrodynamic modeling of tug behavior
- Using custom tug controllers (Aquamaster or similar as provided by buyer) to perform Tug handling maneuvers
- Making fast and adjusting line length
- Making towage transit
- Basic Rope behaviour under tension
- Visualisation with facility to pan 360 degree around the horizon
- Effect of wind and weather conditions
- Push/Pull action by tug
- Procedural training in tug operations


BRIDGE EQUIPMENT

RADAR/ ARPA

The ARI Radar/ARPA simulator meets the requirements of simulators as per IMO Regulations I/12 regarding the use of simulations in training and exercise. Additionally, it incorporates the features that are demanded from radar equipment installed on board after 1st January 1999 as per MSC Resolution 64 (67) and ARPA equipment installed after 1st January 1997 as per MSC Resolution A.823 (19). It also meets the STCW recommendations for Radar simulators.



Primary features of the Radar/ARPA Simulator:

- Understanding Characteristics of radar sets and factors affecting performance
- Set up and maintain radar display
 - o Switch Standby – On
 - o Alter pulse length
 - o Adjust controls to give an optimal picture (tuning, gain etc.)
 - o Adjust display controls (brilliance, range selector, range ring, VRM, EBL, heading marker, anti-clutter etc.)
 - o Adjust display modes (true motion, relative motion – unstabilised, relative motion – stabilized, north up, course up, head up)
 - o Verify compass input for relative stabilized display, and compass and log input for true motion display
 - o Use centre offset, centre reset functions
 - o Set and alter range scale
 - o Measure ranges and bearings
- Perform manual radar plotting:
 - o Determine course, speed and aspect of other ships
 - o Determine CPA and TCPA
- Fix vessels position by radar
- Identify aids to radar navigation and safety
- Use parallel indexing in radar navigation
- Use Radar to Avoid Collisions or Close Encounters

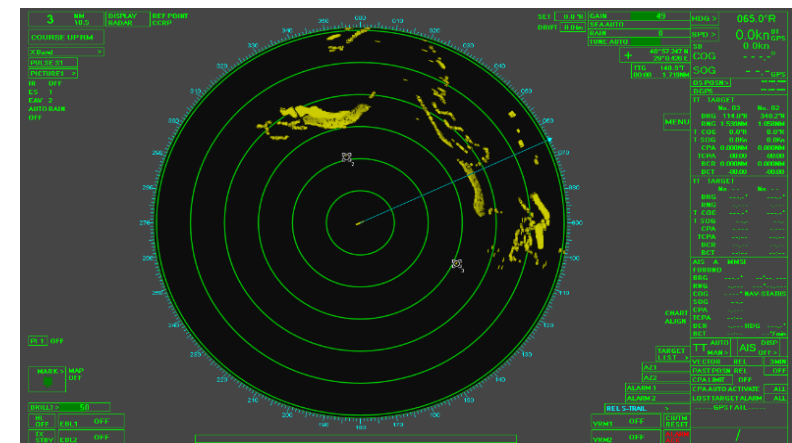

Radar Display

- Observe the effect of precipitation on radar detection
- Identify blind areas and shadow areas
- Observe how clutter may mask targets (sea clutter, rain clutter)
- Set up and maintain an ARPA display
- Acquire targets using ARPA function
 - o Use auto-acquisition zone(s)
 - o Delete acquired targets
- Observe processing delays in obtaining target information
- Obtain target information
 - o Course, speed, CPA, TCPA, BCR etc.
- Use ARPA to assist in applying COLREGS
- Observe and interpret True vectors and Relative vectors
- Use target history display
- Observe and interpret warnings and alarms related to Radar and ARPA functions
- Use performance monitor
- Set up and use a PI line
 - o Use more than one PI line
- Use Nav Marks function
- Interpret real motion of vessel from a tracked echo
- Observe errors to RADAR/ARPA display, including for example:
 - o Heading marker error, variable range marker, gyro error etc.
- Observe factors which might cause faulty interpretation of the radar picture, for example, interference, side echoes, multiple echoes, second trace echoes, etc.

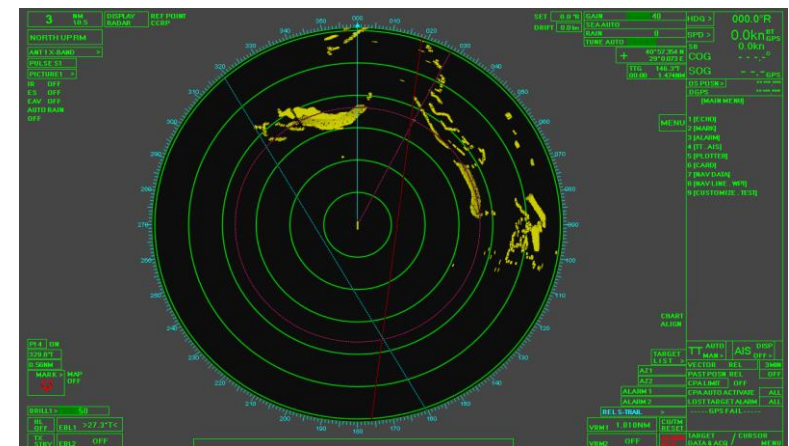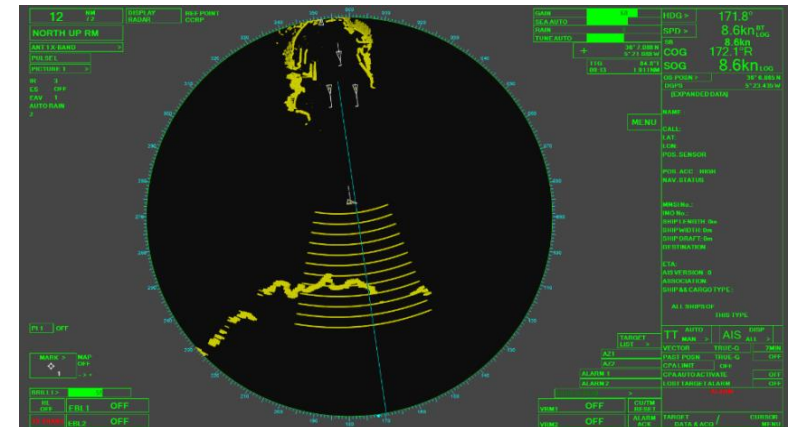


ECDIS

The ARI ECDIS Simulator is a comprehensive training solution designed to comply with the relevant requirements of STCW 2010 under section(s) A-I/12, A-II/1 and A-II/2 and it meets the objectives and training requirements as specified in the IMO modular course 1.27. In addition to being used as a training tool for familiarization and operational training, it can also be used to demonstrate competence in accordance with the STCW 2010 requirements.

The simulator includes ECDIS software providing the functionality of a ship-board ECDIS system.

Some of the available features are as follows:

- Basic navigational functions and settings
- Operation of Electronic Charts, ARCS, C-Maps etc. & Chart updating
- Route planning check functions
- Route monitoring functions
- Required indications and alarms
- Display of navigational sensor information
- Overlay of ARPA target information
- RADAR overlay function
- Overlay of AIS information
- Typical Sensor Faults & Failures
- Data recording & playback
- Presentation of ECDIS data in accordance with the requirements
- Route Planning and Monitoring functions

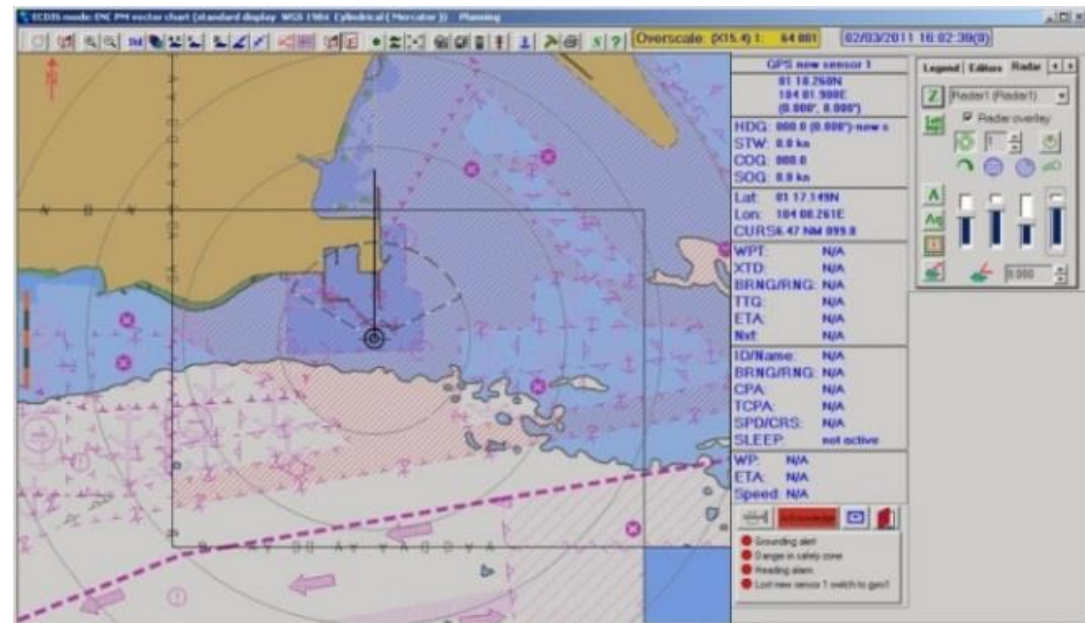

ECDIS Display

CONNING AND MANOEUVRING STATION

Own Ship controls and displays include:

- Rudder controls and indicators
- Rate of Turn indicator
- Magnetic compass and Gyro compass repeaters
- Engine controls including RPM and thruster control
- Doppler Log
- Time, wind, distance sailed, depth indicators
- Own ship navigational lights display control
- Own Ship Fog Horn (Auto/Manual) controls
- Pilot card and Manoeuvring characteristics for own vessel
- Engine Alarm Panel
- Engine Control Panel
- Telegraph control display (for engine speed/direction control)



On-screen conning controller station



Gyro Compass display



Magnetic Compass display

GMDSS

GMDSS Module includes the following simulated equipment:

- VHF DSC
- MF-HF DSC
- NBDP
- INMARSAT C, B
- Fleet 77
- Navtex
- EPIRB
- AIS SART
- Portable VHF
- Battery Panel
- Remote Distress Alarm Panel
- Intercom & PA



ELECTRONIC NAVIGATION EQUIPMENT (NAV-AIDS)



ECHO Sounder



DGPS



Automatic Identification System (AIS)




Doppler Log


CONNING AND MANOEUVRING HARDWARE HMI

The Conning and Manoeuvring hardware control includes:

- Engine Telegraph
- Bow Thruster Control Panel
- General Alarm Panel
- Engine control
- Engine Status
- Sound Panel
- NFU Lever
- Lamp Test and Dimmer Panel
- Auto pilot control

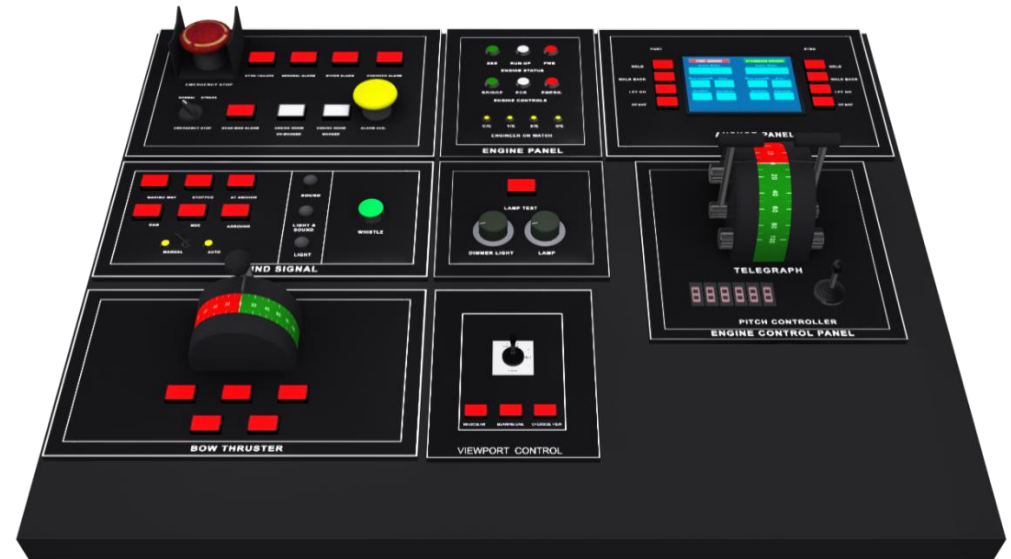


Conning and Manoeuvring Hardware HMI

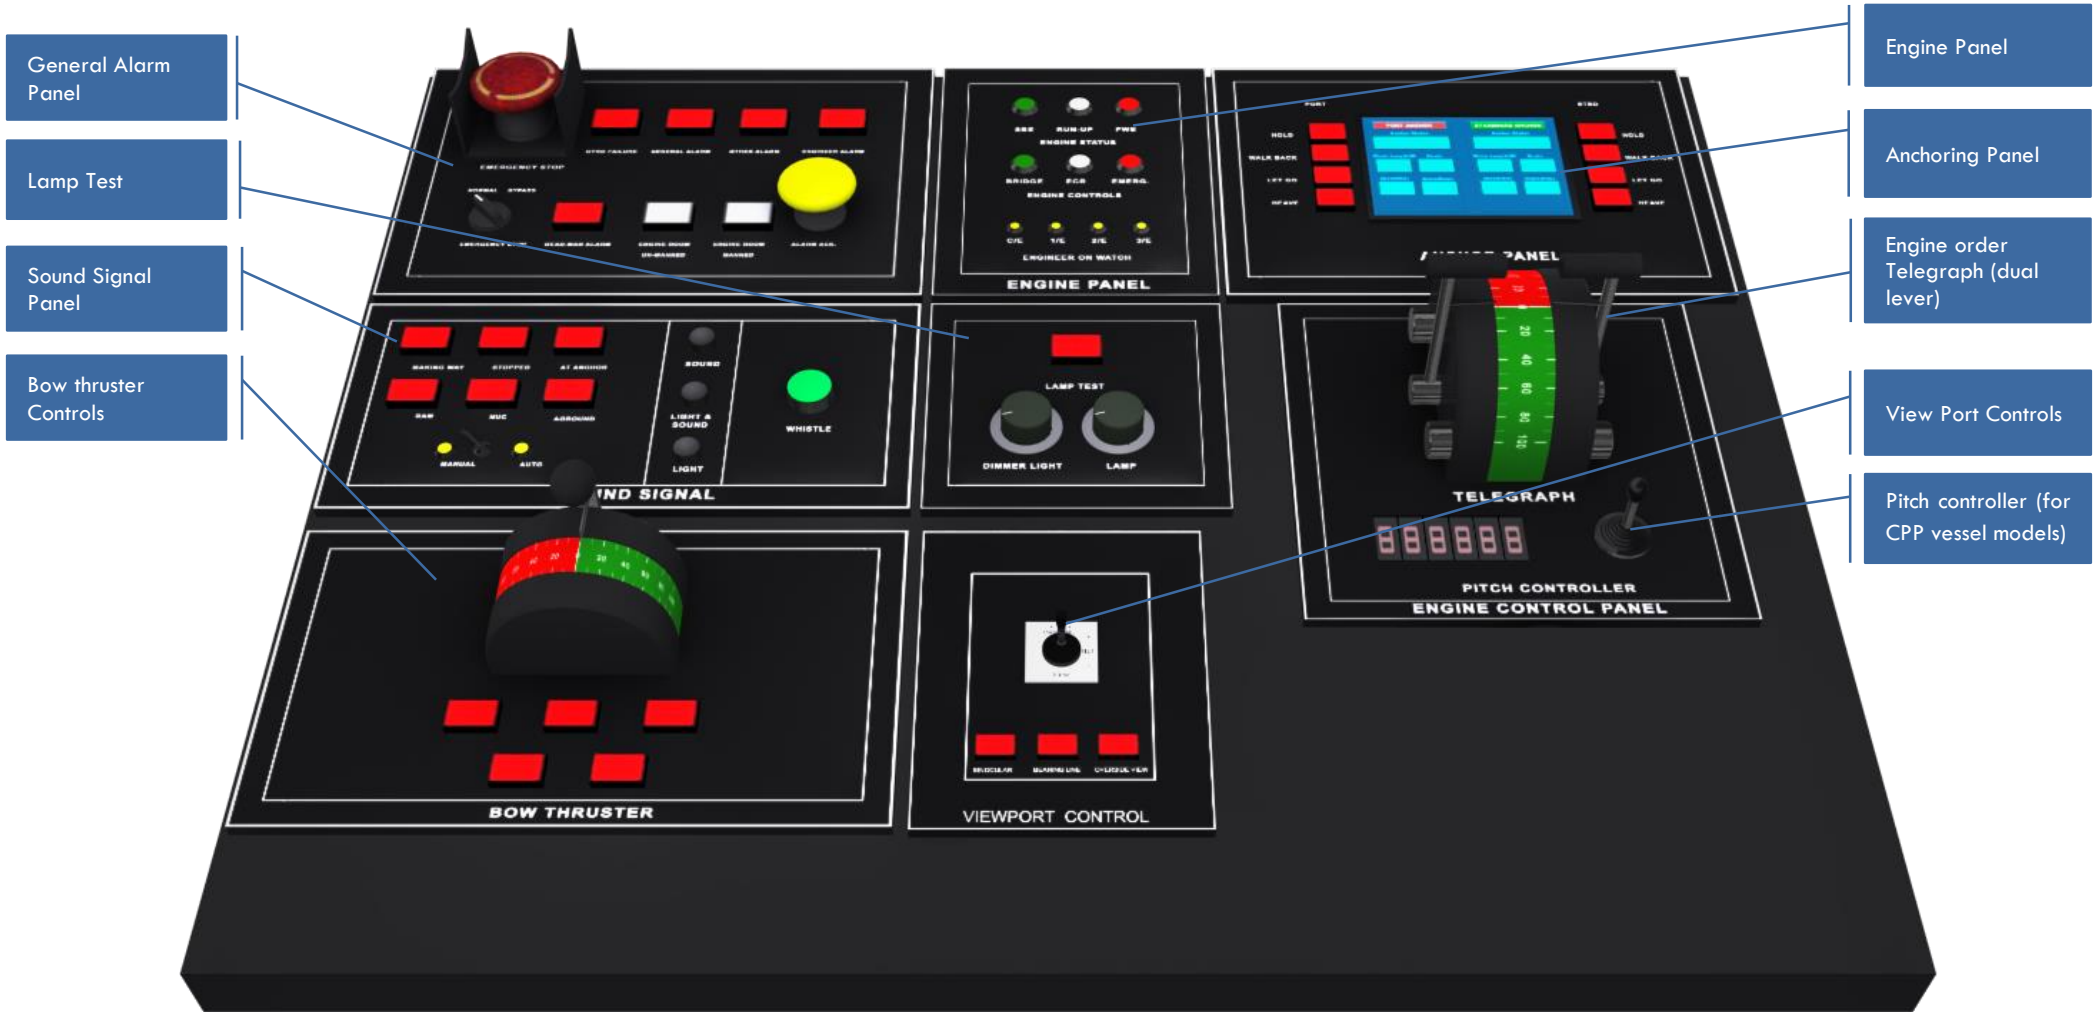

Conning and Manoeuvring Control Panel


MOORING AND ANCHORING

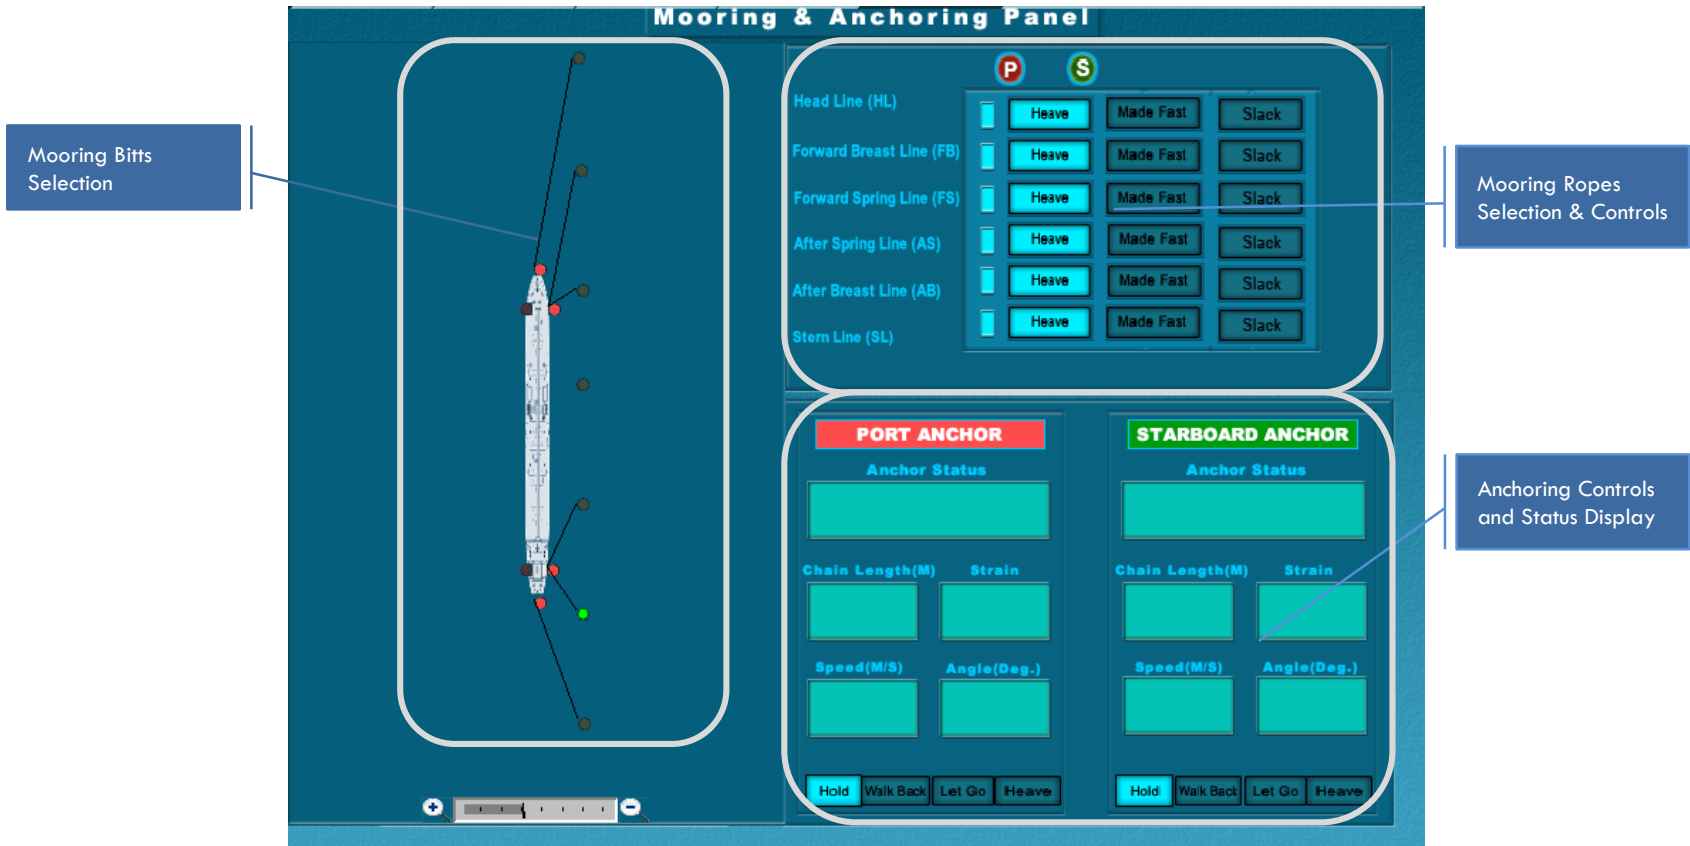


Mooring and Anchoring User Interface





ICE NAVIGATION MODULE (OPTIONAL)



The Ice module provides full out of the window view of real world ice environment selectable by the user. The world created on Ice module is based on real world ice conditions and accurately reflects actual conditions to be encountered by a vessel transiting in the ice region. Complete set of ice and weather data is included for better understanding of the navigation passage.

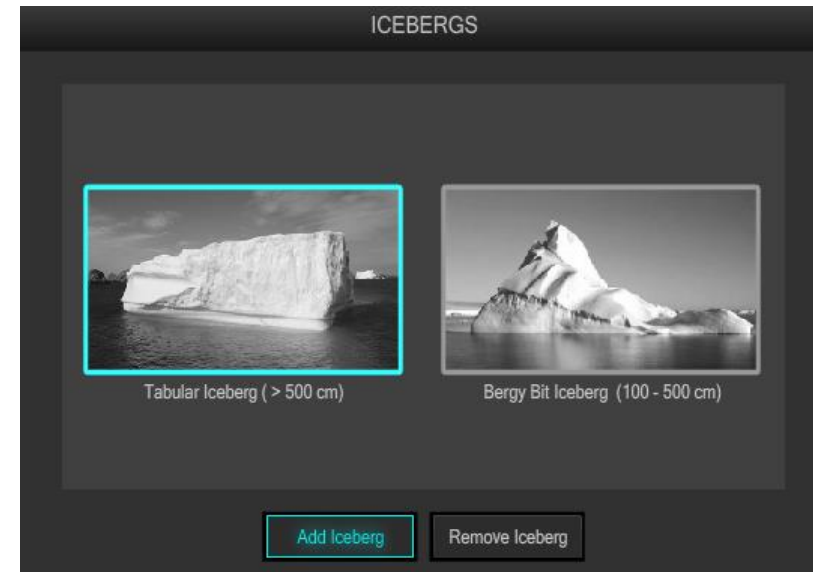

Instructor interface screen for Ice navigation control

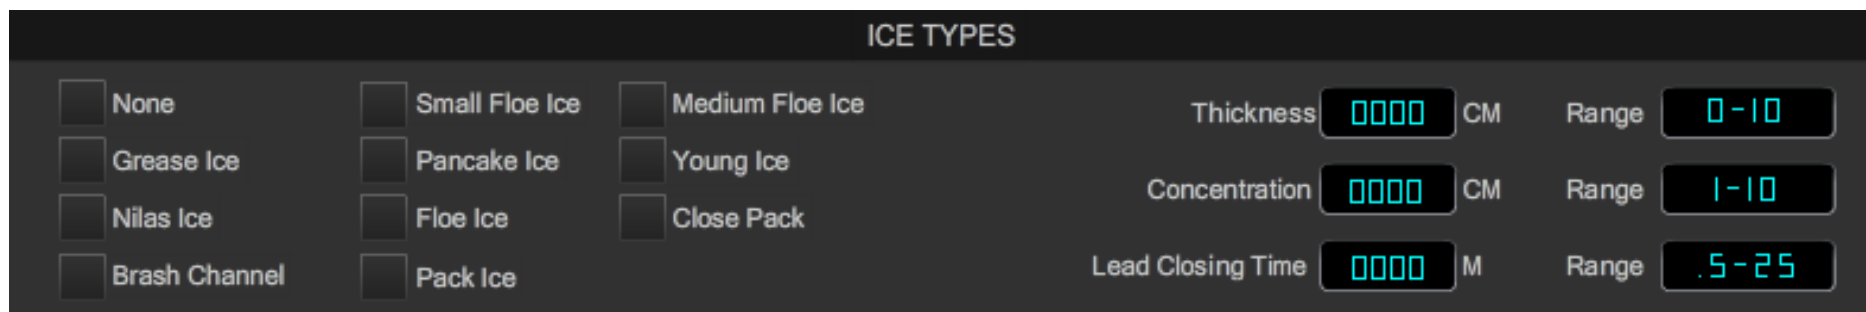

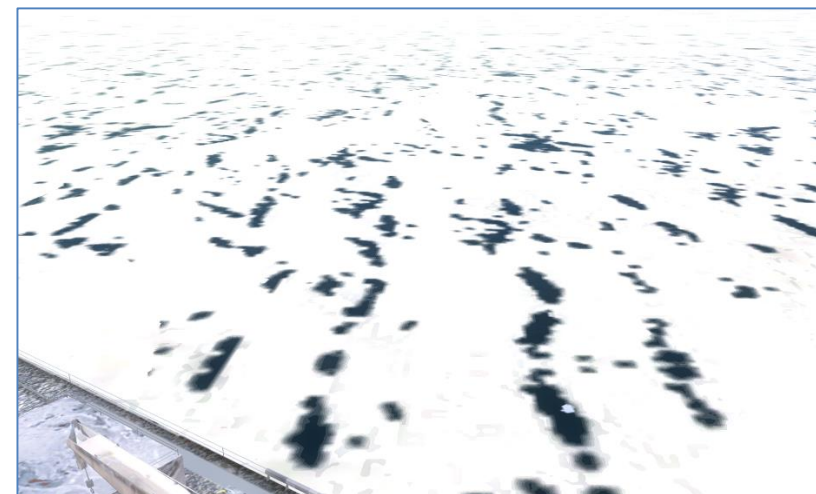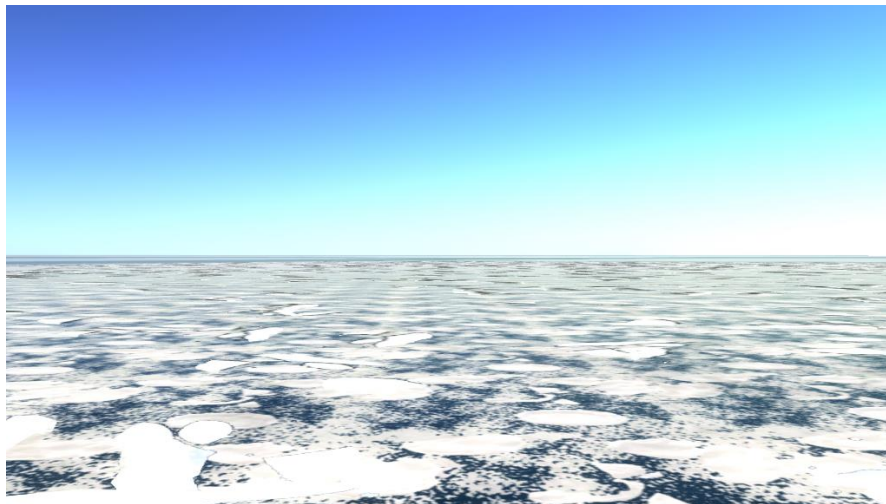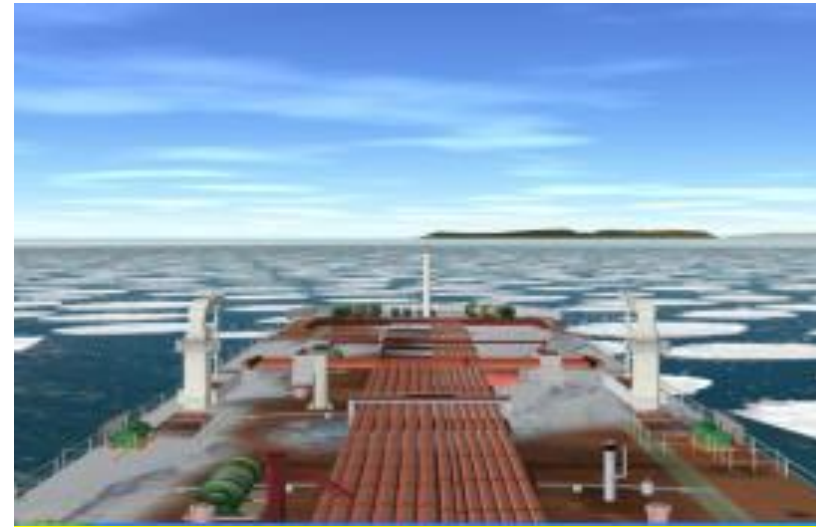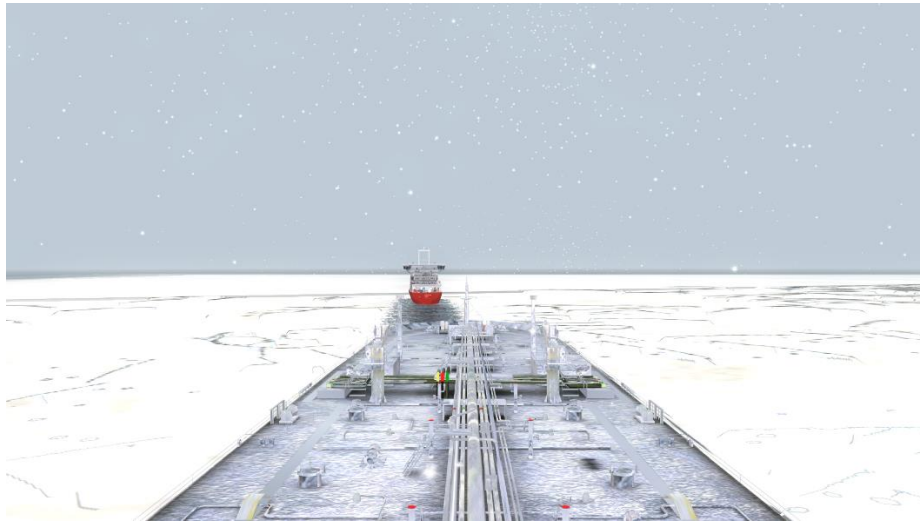

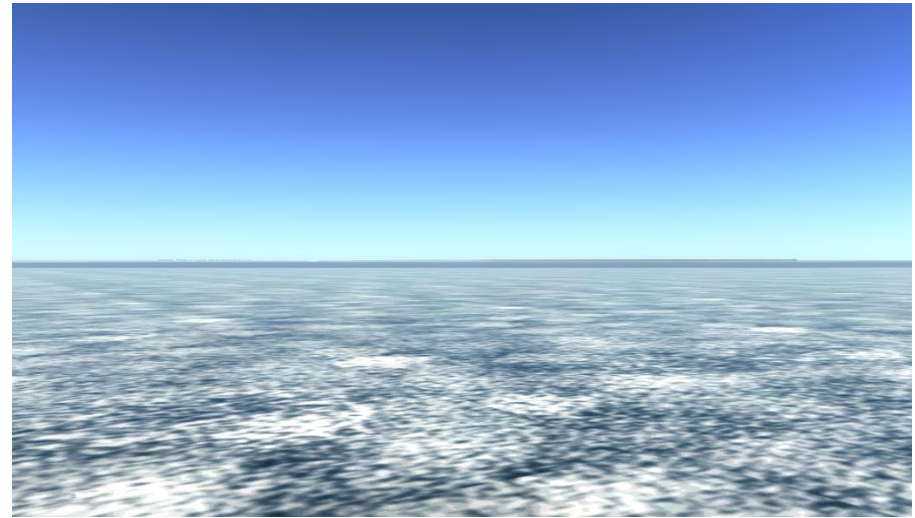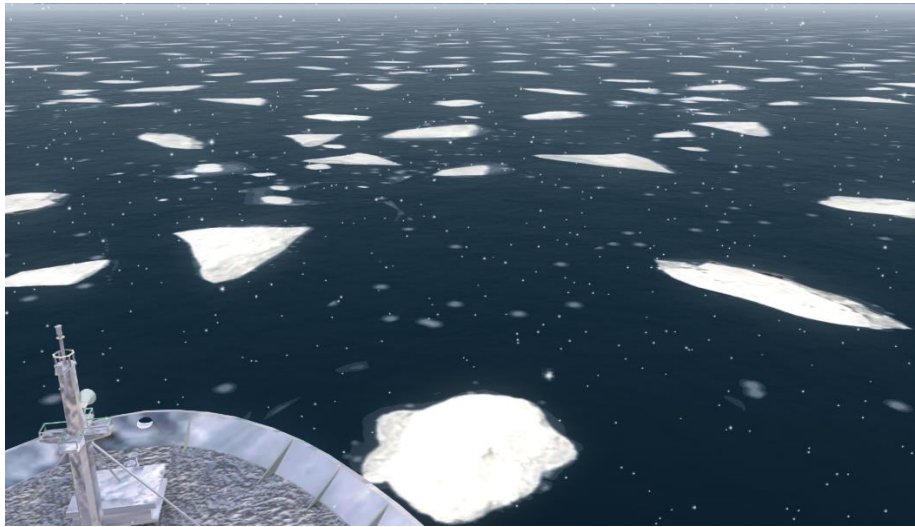

Sample images from Ice Navigation module

RESCUE OPERATIONS

Search and Rescue Patterns

Using the ECDIS based SAR Module, the navigator can create SAR routes using selected options to plan for SAR operation. Different route patterns can be created, for example:


- Expanding square
- Sector
- Parallel line

To create the Expanding Square search pattern on the ECDIS for example, the Trainee will follow these steps:


The start point of the route is either the position of the ship.

- Select the direction of search
- Select the speed to proceed the route
- Select the search area with the parameter Radius of search
- Select the space between leg with the parameter Route spacing


The system will create the pattern automatically using these parameters. The trainee can monitor the position on the route by observing the position of the vessel as it is automatically updated on the Chart (ENC).

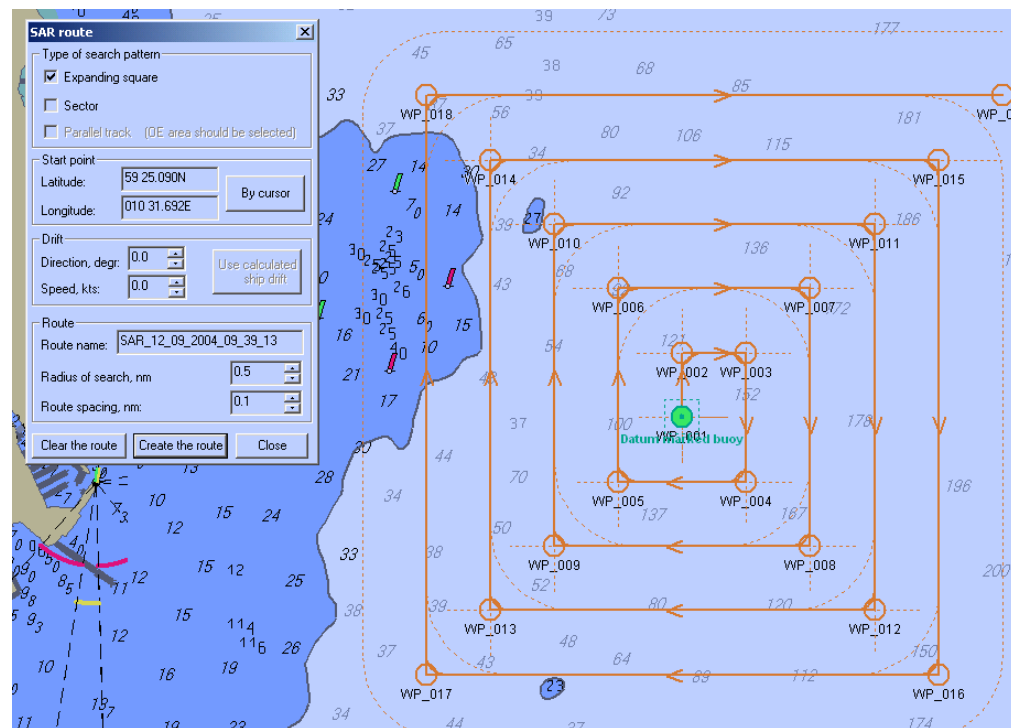


Example of an Expanding Square Search Pattern

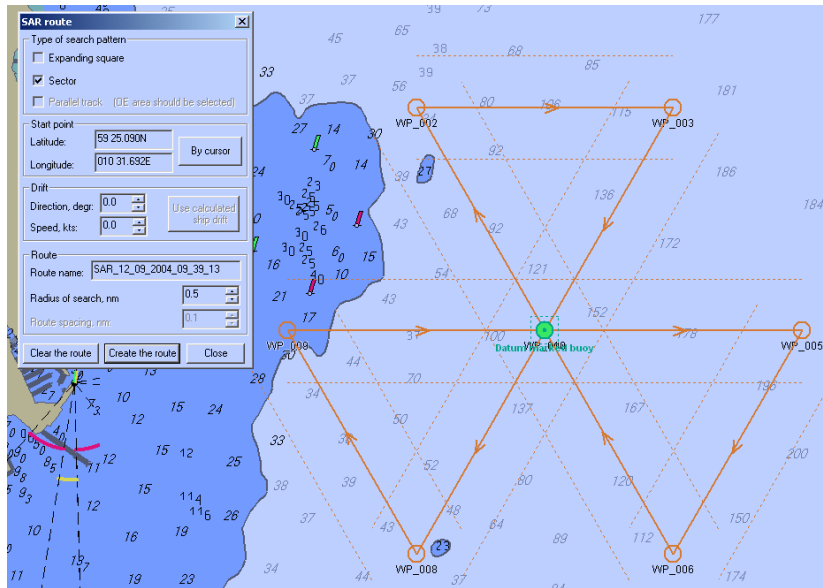

Example of a Sector Search Pattern

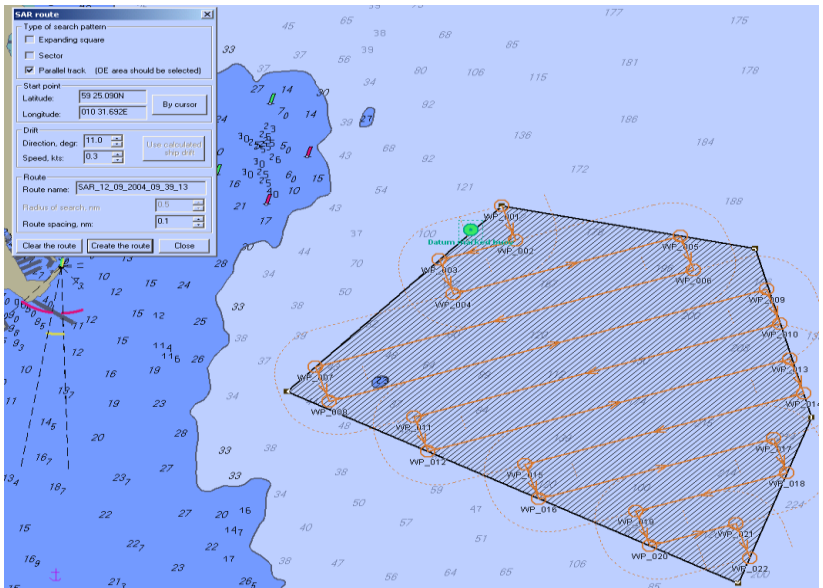

Example of a Parallel Line Search Pattern

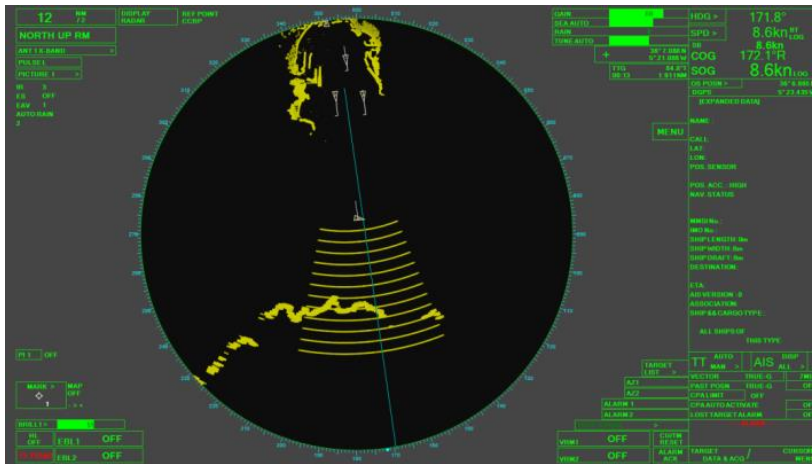

SART




Coloured Smoke

EVALUATION / ASSESSMENT MODE

Assessment tool has been designed keeping in mind competent based assessment of the trainee i.e. a carefully considered judgement of the workplace performance to demonstrate that the individuals can perform or behave in accordance with the real time and operational requirements.

The facility includes possibilities to Set up a scoring method to assess performance of the learner.

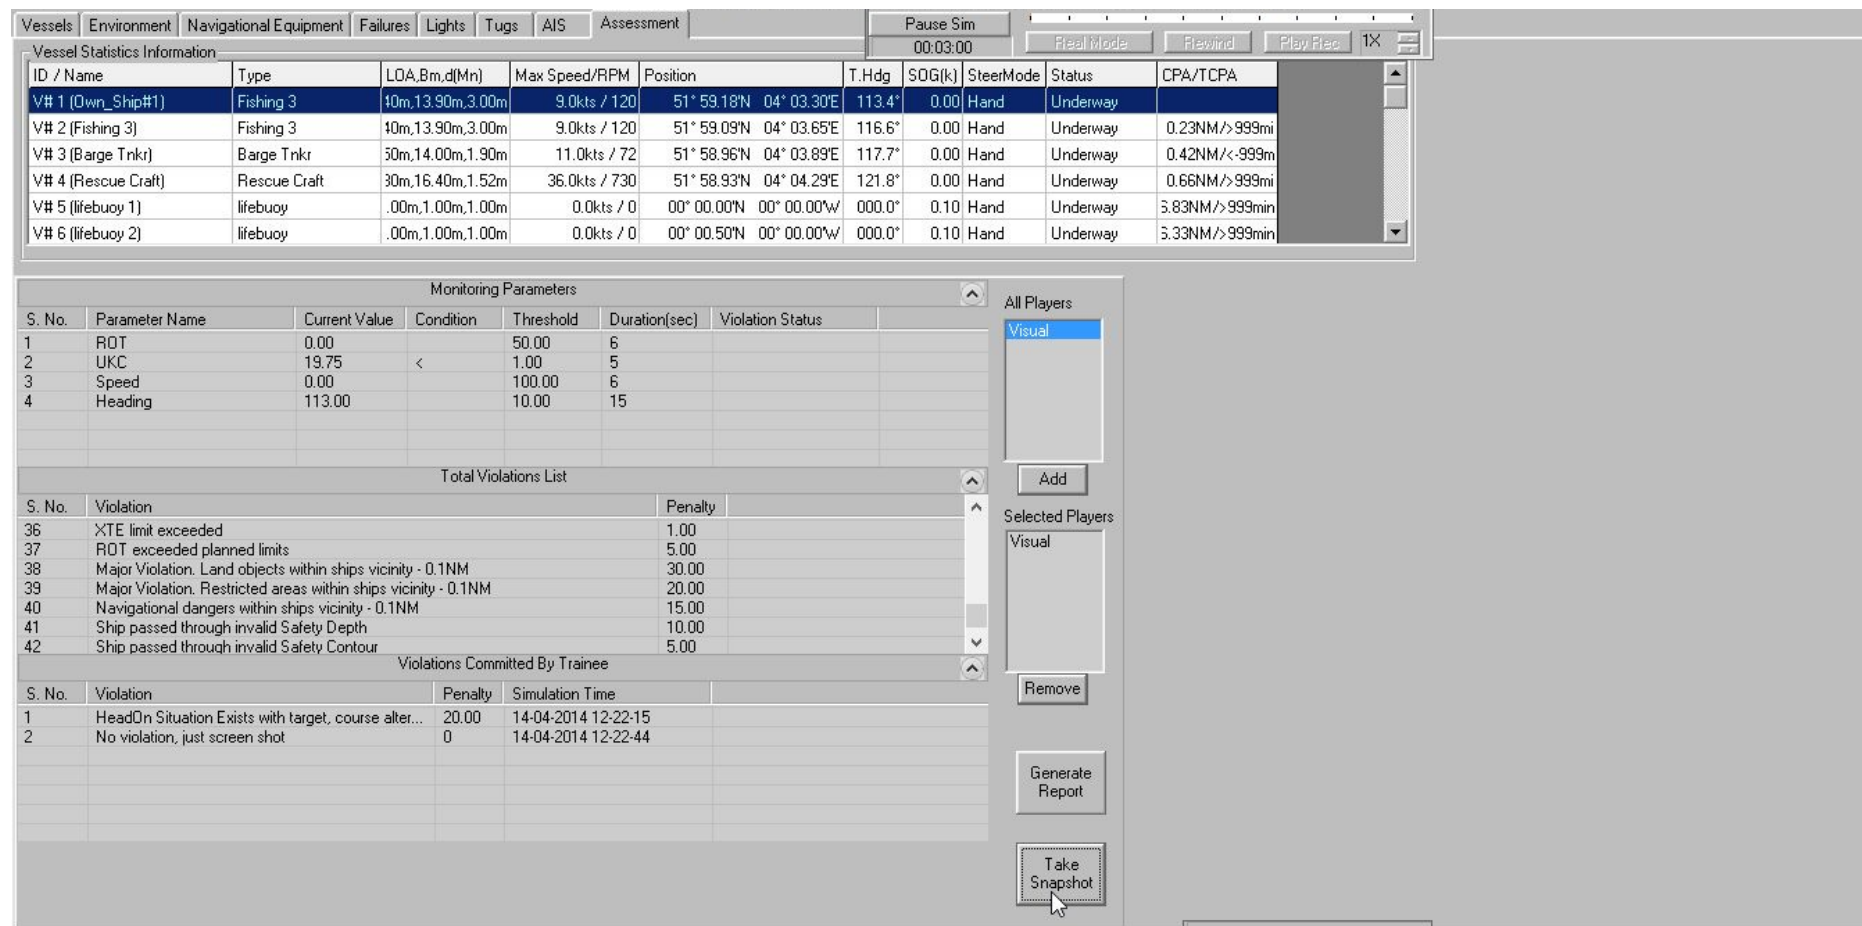

Vessel Statistics Information

ID / Name	Type	LOA,B,m,d(Mn)	Max Speed/RPM	Position	T.Hdg	SOG(k)	SteerMode	Status	CPA/TCPA
V# 1 (Own_Ship#1)	Fishing 3	40m,13.90m,3.00m	9.0kts / 120	51° 59.18'N 04° 03.30'E	113.4°	0.00	Hand	Underway	
V# 2 (Fishing 3)	Fishing 3	40m,13.90m,3.00m	9.0kts / 120	51° 59.09'N 04° 03.65'E	116.6°	0.00	Hand	Underway	0.23NM/>999mi
V# 3 (Barge Tnkr)	Barge Tnkr	50m,14.00m,1.90m	11.0kts / 72	51° 58.96'N 04° 03.89'E	117.7°	0.00	Hand	Underway	0.42NM/<999m
V# 4 (Rescue Craft)	Rescue Craft	30m,16.40m,1.52m	36.0kts / 730	51° 58.93'N 04° 04.29'E	121.8°	0.00	Hand	Underway	0.66NM/>999mi
V# 5 (lifebuoy 1)	lifebuoy	.00m,1.00m,1.00m	0.0kts / 0	00° 00.00'N 00° 00.00'W	000.0°	0.10	Hand	Underway	3.83NM/>999min
V# 6 (lifebuoy 2)	lifebuoy	.00m,1.00m,1.00m	0.0kts / 0	00° 00.50'N 00° 00.00'W	000.0°	0.10	Hand	Underway	3.33NM/>999min

Monitoring Parameters

S. No.	Parameter Name	Current Value	Condition	Threshold	Duration(sec)	Violation Status
1	ROT	0.00		50.00	6	
2	UKC	19.75	<	1.00	5	
3	Speed	0.00		100.00	6	
4	Heading	113.00		10.00	15	

Total Violations List

S. No.	Violation	Penalty
36	XTE limit exceeded	1.00
37	ROT exceeded planned limits	5.00
38	Major Violation. Land objects within ships vicinity - 0.1NM	30.00
39	Major Violation. Restricted areas within ships vicinity - 0.1NM	20.00
40	Navigational dangers within ships vicinity - 0.1NM	15.00
41	Ship passed through invalid Safety Depth	10.00
42	Ship passed through invalid Safety Contour	5.00

Violations Committed By Trainee

S. No.	Violation	Penalty	Simulation Time
1	HeadOn Situation Exists with target, course alter...	20.00	14-04-2014 12:22:15
2	No violation, just screen shot	0	14-04-2014 12:22:44

Sample image of Evaluation control screen at Instructor

On-task performance parameters are detected and recorded automatically by the system, and compared to pre-set thresholds to determine if a violation has occurred. In the event of a violation (which is a combination of the threshold value and the duration for which the threshold has been crossed continuously), the occurrence will be recorded along with the pre-set numerical penalty.

All violations can be triggered by the Instructor from a pre-defined list.


Instructor can take a 'Snapshot' of the situation to store an instant image of the scenario which the instructor thinks is noteworthy, or as supporting information for any violation as recorded.

A Report of the assessment can be generated and printed.

AUDIO GENERATOR

The bridge simulator consists of a sound generator capable of providing environmental and operational sound according to conditions simulated.

PROPOSED SOLUTION

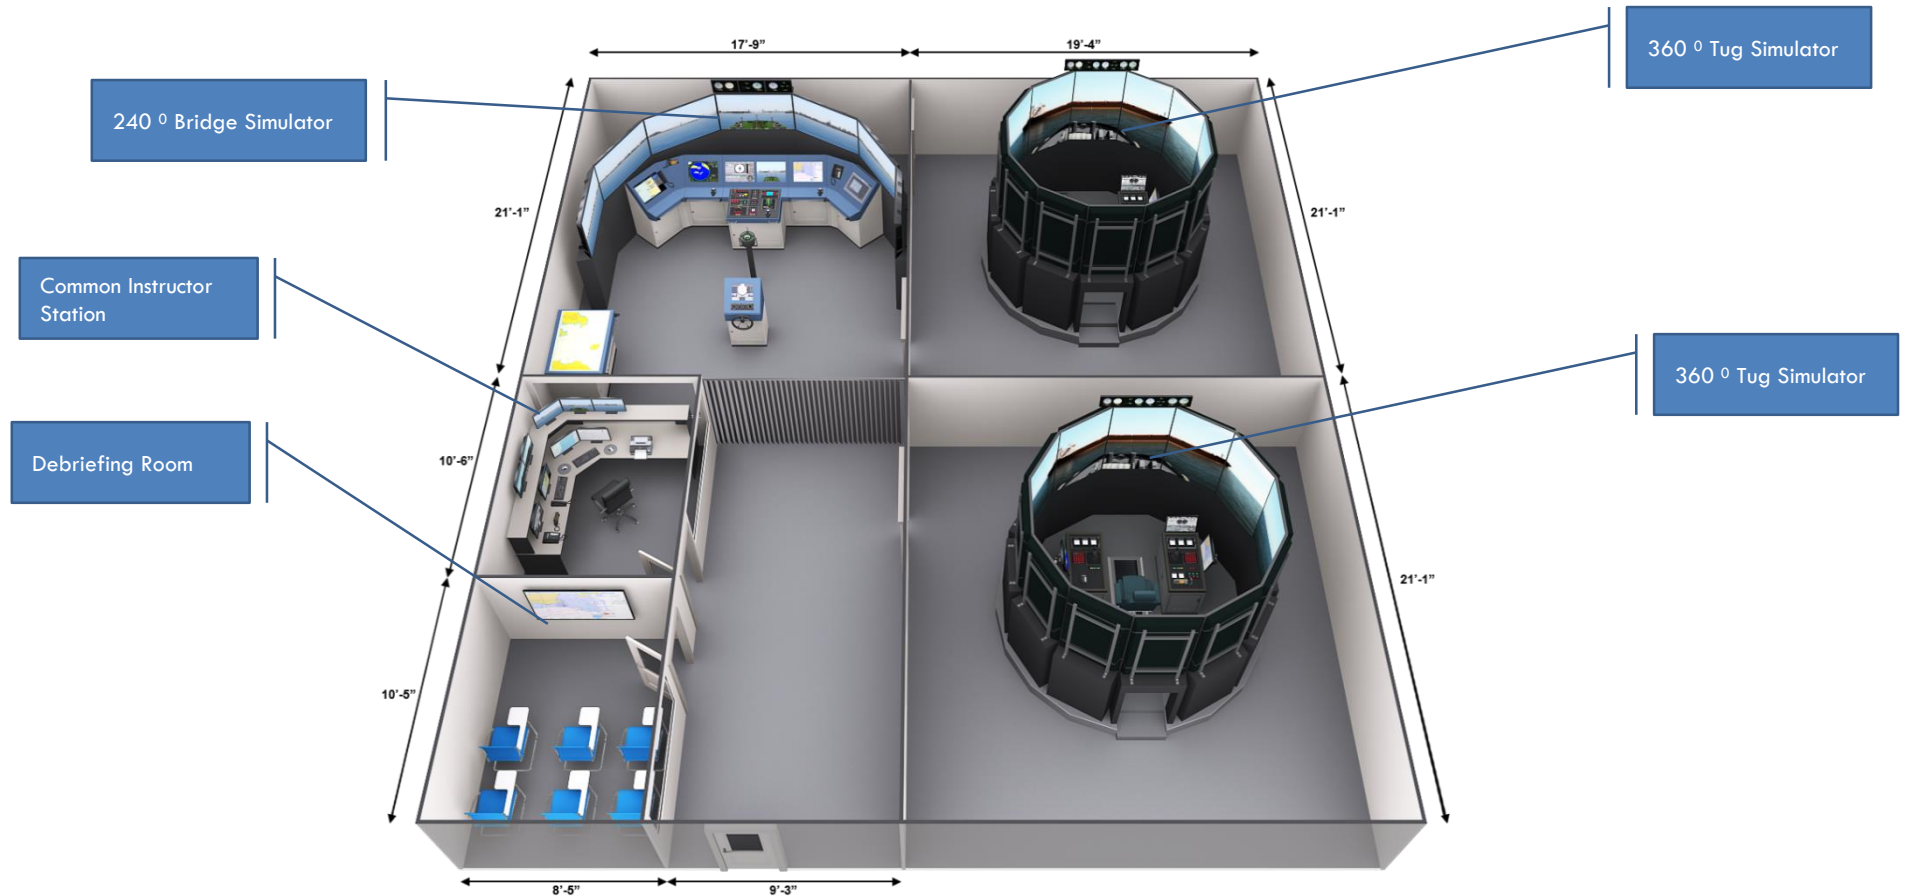

Indicative Layout



240° Bridge Trainee Station Components

CONNING & MANEUVERING



Bridge Conning and Manoeuvring Panel

360 Deg. Full Mission Tug Simulator



WWW.ARISIMULATION.COM



RHS & LHS Controls with interfacing circuit for integration of Tug Controls

INSTRUCTOR STATION



Instructor Station

ADDITIONAL BRIDGE FEATURES

ADDITIONAL FEATURES:

- Anchoring and Mooring Module
- Ship to Ship
- Maneuvering using tugs
- Maneuvering with mooring lines fixed to jetty
- Maneuvering with mooring lines fixed to buoy
- Anti-Piracy Module
- Fire Control Detection Panel
- Bow/ Stern Monitoring System
- Hull Stress Monitoring
- Ballast Water Control Panel
- Torque Indicator
- Fire door/water tight door monitoring panel

TUG FEATURES

- Ship Assisting work
- Escort work
- High fidelity hydrodynamic modeling of tug behaviour
- Using custom tug controllers to perform Tug Handling Maneuvering
- Making fast and adjusting line length
- Making towage transit
- Basic rope behaviour under tension
- Visualisation with facility to 360° around the horizon
- Effect of wind and weather conditions
- Push/ Pull action by tug
- Procedural training in tug operations
- Conning and Maneuvering Station

DATABASE

- 5 Indonesia Sailing Area (Tj. Priok, Tj Perak, Selat Sunda, Selat Makasar, Sorong)
- 5 International Sailing Area (Singapore, Selat Malaka, Felixstowe, Gibraltar, Bosphorus)
- 20 Kapal Ownship
- 25 Kapal Target

SHIP STABILITY SIMULATOR

A ship stability simulator facility with the Bulk Carrier type, which is capable of simulating physical phenomena ship stability. A ship stability simulator is a simulation software that functions to simulate phenomena the stability of a ship in 3 vector axes (roll, pitch and heave).

With the loading given, there will be a change in the orientation of the ship at any time. Ship direction orientation in the 3 axis vectors at any time it will be calculated by the simulation software, then the calculation of the parameters is also carried out the stability of the ship, which is displayed in both 2D and 3D modes. Where is the 3D representation view

The animation referred to can be shown changes in the magnitude of the force and the position of the mechanical central points (center of gravity, center of buoyancy, metacentric, etc.) at any time as a result of changes in the weight and location of the load, shown the position point and the magnitude of each vector. In addition, the computer will also display curves ship stability parameters of the ship model.

By using this ship stability simulator it can be introduced to students about:

- 1) The concept of displacement
- 2) Calculating the actual position of the ship G when shifting or Light-Ship
- 3) Calculating the position of G in the longitudinal direction: LCG
- 4) Determine the position of G in the vertical direction: KG
- 5) Determine the position of G in the transverse (transverse, lateral) direction: TCG
- 6) Calculating the ship's G position as a result of carrying the cargo
- 7) Calculating the ship's G position due to unloading
- 8) Calculating the ship's G position as a result of shifting cargo
- 9) Shifting the load in longitudinal direction to change the trim
- 10) Shifting the charge in the transverse direction to change the zincet
- 11) Adjusting the ballast tank to obtain certain draft conditions
- 12) Assessing the ship is in tender or stiff condition
- 13) Effect of slack water

The ship model will refer to the bulk carrier vessel model with the following configurations:




- Has a hold space
- Has a ballast tank
- Have a freshwater tank
- Has a fuel tank

This ship model is also used to model the ship on the bridge simulator, so that the stability effect can be obtained The difference is felt when the ship moves and is disturbed by the waves.

IMO Model Course 7.04, function 4: Controlling the Operation of the Ship and Care for Person on Board at the Operational Level, competence : maintain seaworthiness of the ship, subject : ship stability

With topics :

- Displacement
- Buoyancy
- Static Stability
- Angle of Loll
- Curves of Static Stability
- Movement of center of gravity
- List and its correction
- Trim
- Ship Stresses

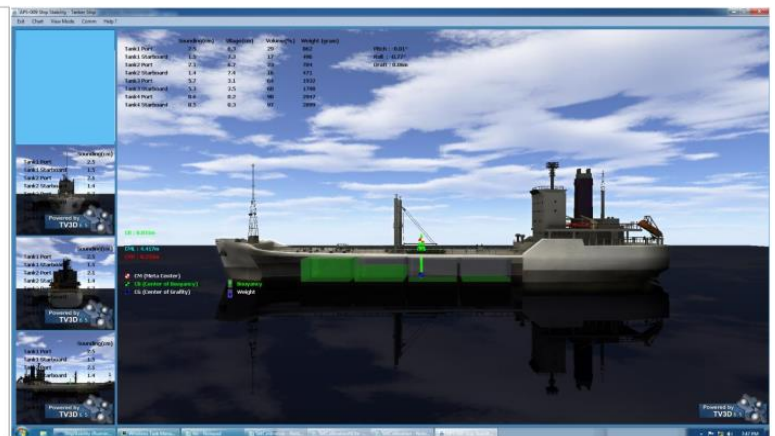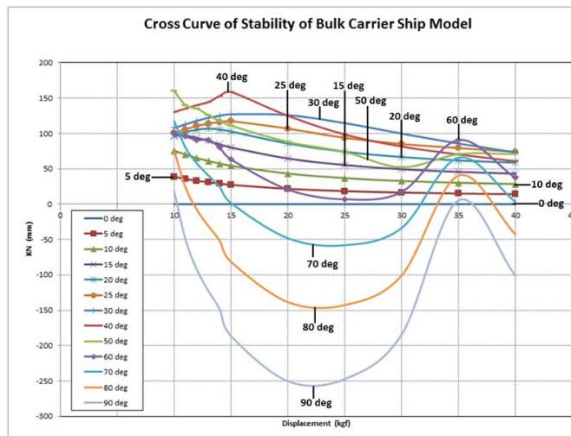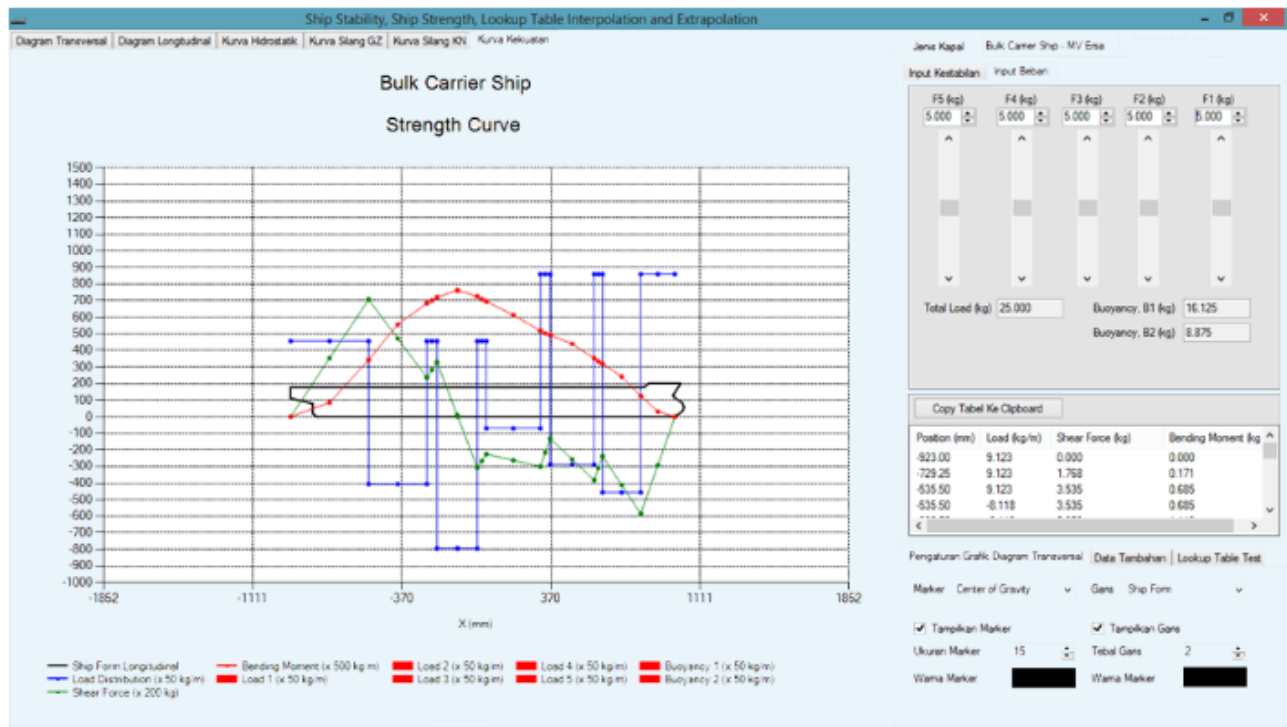

Indicative Picture of Ship Stability Simulator


THE INTEGRATION BETWEEN SHIP STABILITY WITH BRIDGE SIMULATOR

Trainees will input the size of the container load in the ship stability simulator and adjust the position of the container placement on the ship. Positioning and the magnitude of the load will result in changes to the data on the bridge. Trainees can view the changes on:

1. The draft of the ship (both aft and forward positions), this can be proven by changes in the echosounder
2. Visuals on the horizon line
3. Draft Displacement is also seen in Conning which affects the maneuverability and speed of ownship vessels.

The next influencing external factors are:

- Weather Condition (Wind Force)
- Wave
- Current

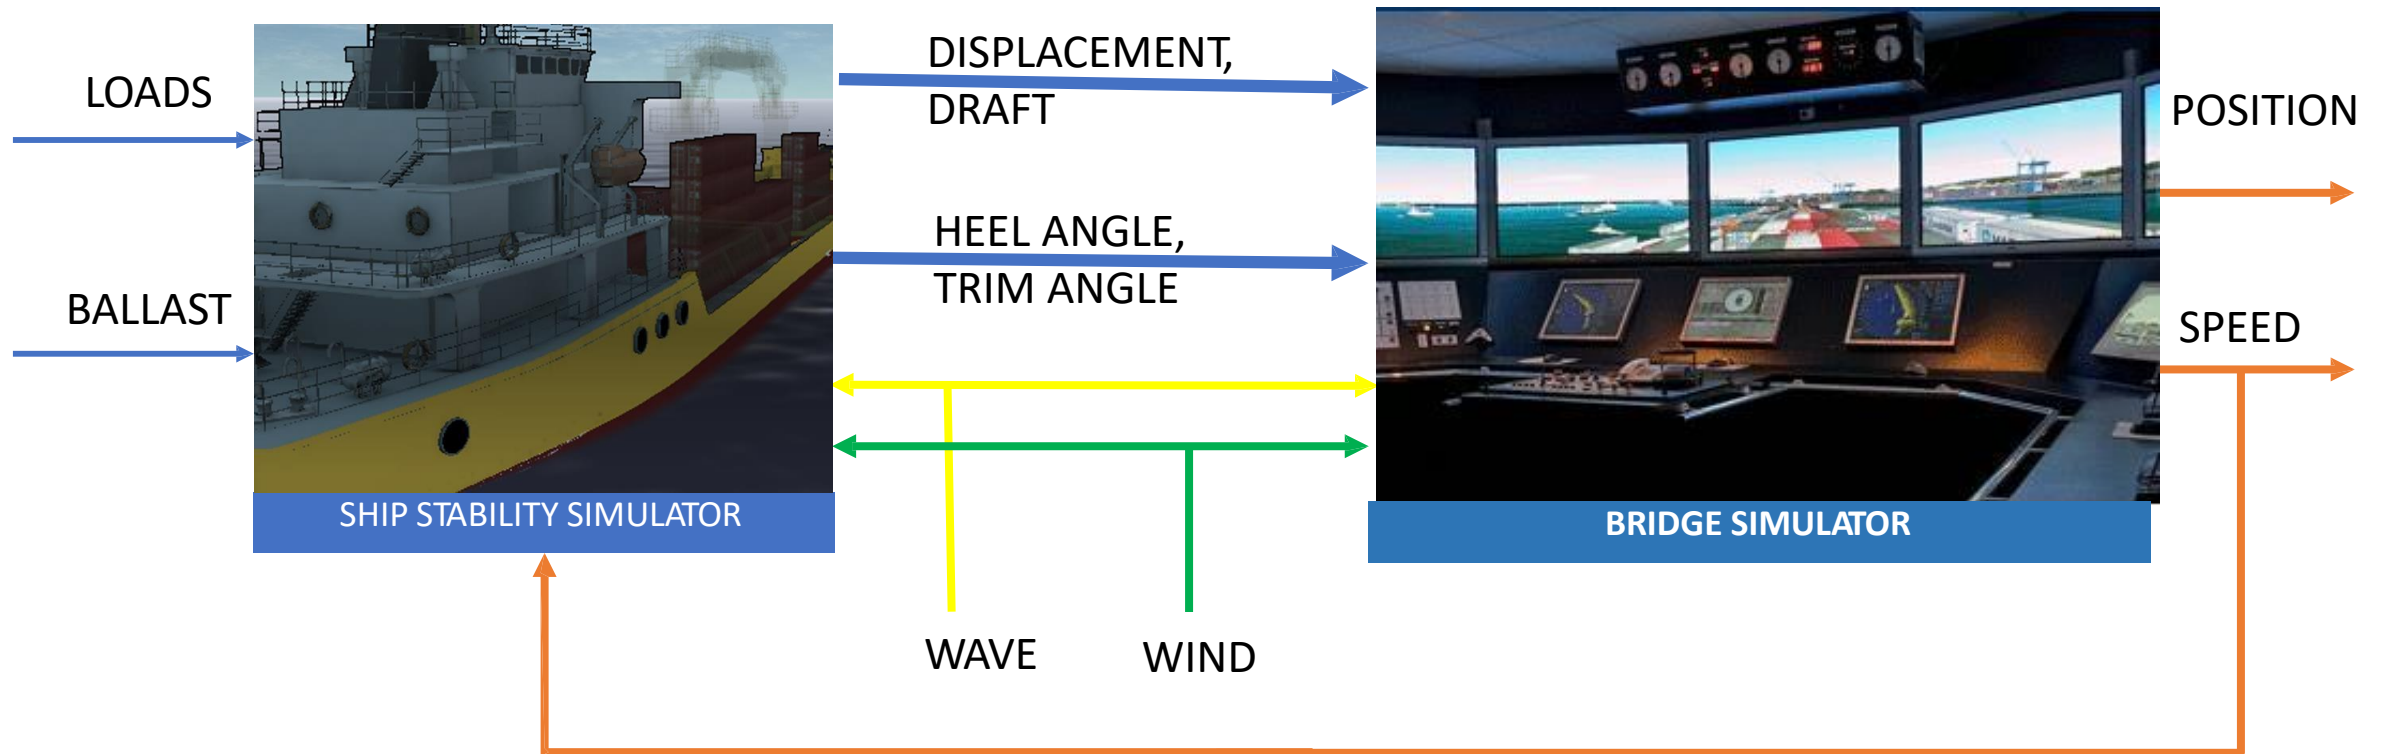

STATEMENT OF COMPLIANCE

Statement No:
023/180511
 DNV GL Id No:
142684

Particulars of Product

Function Area:	Bridge Operation Simulator
Class Notation	INTEGRATED SIMULATOR SYSTEM, NAUT AW (SIM), DYNPOS - AUT (SIM), HSC, TUG, ICE, AHTS,IN
Name and type designation:	ARI-NAVSIM10000λn Dry Cargo Ships, Container Ships, RO/RO Ships, Passenger Ships, Oil Tankers, Chemical Tankers, Liquefied Gas Tankers, Compressed Gas Tankers Naval, Naval Support, Naval Landing Craft Offshore Service Vessel - Anchor Handling, Towing, Supply, AHTS, Windfarm Maintenance, Standby Vessel, + Vessel of Special Operations – Crane Vessel, Cable Laying Vessel, Pipe Laying Vessel, Diving Support Vessel, Fire Fighter, Semi-Submersible Heavy Transport Vehicle, Icebreaker, Tug, Dredger, Pusher, Inland Water Craft, Fishing Vessel, Stern Trawler

Particulars of Manufacturer

Manufacturer:	ARI Simulation
Manufacturer address:	Applied Research International

This is to confirm:

That the above product is found to comply with Class A- Standard for Certification of Maritime Simulators No. DNVGL-ST-0033 April 2018.

Application

The above Standard is based on requirements in the STCW Convention, Regulation I/12 and corresponding industry standard and guidelines.

This Statement is valid until **2023-05-11**, provided the requirements for the retention of the Statement will be complied with.

Issued at **Sandefjord** on **2018-05-11**

Nordholm, Aksel
 David

Digitally signed by Nordholm,
 Aksel David
 Date: 2018.05.11 08:12:25 +02'00'

for **DNV GL**



Capt. Aksel David Nordholm
Manager Simulator Certification

Partha Basu
Auditor

This Statement is subject to terms and conditions overleaf. Any significant change in simulation performance may render this Statement invalid.



Form code: MSS 301

Revision: 2018-03

www.dnvgl.com

Page 1 of 3

Application/Limitation

The simulator is capable of simulating a realistic environment for all of the applicable STCW competence requirements referred to in the column for Class A, B, C and S in Table 3-2.

Table 3-2 Competencies addressed by bridge operation simulator class					
<i>STCW reference</i>	<i>Competence</i>	<i>Class A (NAV)</i>	<i>Class B (NAV)</i>	<i>Class C (NAV)</i>	<i>Class S (NAV)</i>
Table A-II/1.1	Plan and conduct a passage and determine position	A	B		(S)
Table A-II/1.2	Maintain a safe navigational watch	A	B		(S)
Table A-II/1.3	Use of radar and ARPA to maintain safety of navigation	A	B	C	(S)
Table A-II/1.4	Use of ECDIS to maintain the safety of navigation	A	B	C	(S)
Table A-II/1.5	Respond to emergencies	A	B	C	(S)
Table A-II/1.6	Respond to a distress signal at sea	A	B	C	(S)
Table A-II/1.8	Transmit and receive information by visual signalling	A	B	C	(S)
Table A-II/1.9	Manoeuvre the ship	A	B	C	(S)
Table A-II/2.1	Plan a voyage and conduct navigation	A	B		(S)
Table A-II/2.2	Determine position and the accuracy of resultant position fix by any means	A	B		(S)
Table A-II/2.3	Determine and allow for compass errors	A	B		(S)
Table A-II/2.4	Co-ordinate search and rescue operations	A	B		(S)
Table A-II/2.5	Establish watchkeeping arrangements and procedures	A	B		(S)
Table A-II/2.6	Maintain safe navigation through the use of information from navigation equipment and systems to assist command decision-making	A	B	C	(S)
Table A-II/2.7	Maintain the safety of navigation through the use of ECDIS and associated navigation systems to assist command decision making	A	B	C	(S)
Table A-II/2.10	Manoeuvre and handle a ship in all conditions	A			(S)
Table A-II/2.11	Operate remote controls of propulsion plant and engineering systems and services	A			(S)
Table A-II/3.1	Plan and conduct a coastal passage and determine position	A	B		(S)
Table A-II/3.2	Maintain a safe navigational watch	A	B		(S)
Table A-II/3.3	Respond to emergencies	A	B	C	(S)
Table A-II/3.4	Respond to a distress signal at sea	A	B	C	(S)
Table A-II/3.5	Manoeuvre the ship and operate small ship power plants	A			
Table A-II/5.2	Contribute to berthing, anchoring and other mooring operations	A	B	C	(S)



Statement No: **023/180511**
DNV GL Id No.: **142684**

This Statement of Compliance is for the manufacturer offering the simulator for examination or mandatory simulator training and complies with the requirements of DNVGL-ST-0033 Maritime Simulator Systems.

Based on this statement of compliance, maritime training providers in possession of simulators that comply with the requirements of the standard can apply for a product certificate for "Maritime simulator". The simulator's function area and the simulator class according to the standard will be stated on the certificate.

STATEMENT OF COMPLIANCE

Statement No:
003/180511
DNV GL Id No:
142684

Particulars of Product

Function Area:

Bridge Operation Simulator

Name and type designation:

ARI-NAVSIM10000λn
ECDIS, Radar/ARPA & Navigational Aids

Particulars of Manufacturer

Manufacturer:

ARI Simulation

Manufacturer address:

Applied Research International

This is to confirm:

That the above product is found to comply with Class A- Standard for Certification of Maritime Simulators No. DNVGL-ST-0033 April 2018.

Application

The above Standard is based on requirements in the STCW Convention, Regulation I/12 and corresponding industry standard and guidelines.

This Statement is valid until **2023-05-11**, provided the requirements for the retention of the Statement will be complied with.

Issued at **Sandefjord** on **2018-05-11**

Nordholm, Aksel
David

Digitally signed by Nordholm,
Aksel David
Date: 2018.05.11 07:53:08 +02'00'

for **DNV GL**

Capt. Aksel David Nordholm
Manager Simulator Certification

Partha Basu
Auditor

This Statement is subject to terms and conditions overleaf. Any significant change in simulation performance may render this Statement invalid.



Form code: MSS 301

Revision: 2018-03

www.dnvgl.com

Page 1 of 2

Application/Limitation

The simulator is capable of simulating a realistic environment for all of the applicable STCW competence requirements referred to in the column for Class A, B, C and S in Table 3-2.

Table 3-2 Competencies addressed by bridge operation simulator class					
<i>STCW reference</i>	<i>Competence</i>	<i>Class A (NAV)</i>	<i>Class B (NAV)</i>	<i>Class C (NAV)</i>	<i>Class S (NAV)</i>
Table A-II/1.3	Use of radar and ARPA to maintain safety of navigation	A	B	C	(S)
Table A-II/1.4	Use of ECDIS to maintain the safety of navigation	A	B	C	(S)
Table A-II/1.5	Respond to emergencies	A	B	C	(S)
Table A-II/1.6	Respond to a distress signal at sea	A	B	C	(S)
Table A-II/2.6	Maintain safe navigation through the use of information from navigation equipment and systems to assist command decision-making	A	B	C	(S)
Table A-II/2.7	Maintain the safety of navigation through the use of ECDIS and associated navigation systems to assist command decision making	A	B	C	(S)

This Statement of Compliance is for the manufacturer offering the simulator for examination or mandatory simulator training and complies with the requirements of DNVGL-ST-0033 Maritime Simulator Systems.

Based on this statement of compliance, maritime training providers in possession of simulators that comply with the requirements of the standard can apply for a product certificate for "Maritime simulator". The simulator's function area and the simulator class according to the standard will be stated on the certificate.

STATEMENT OF COMPLIANCE

Statement No:
005/180511
DNV GL Id No:
142684

Particulars of Product

Function Area:	Radio Communication Simulator
Name and type designation:	ARI-COMMSIM10000λn

Particulars of Manufacturer

Manufacturer:	ARI Simulation
Manufacturer address:	Applied Research International

This is to confirm:

That the above product is found to comply with Class A- Standard for Certification of Maritime Simulators No. DNVGL-ST-0033 April 2018.

Application

The above Standard is based on requirements in the STCW Convention, Regulation I/12 and corresponding industry standard and guidelines.

This Statement is valid until **2023-05-11**, provided the requirements for the retention of the Statement will be complied with.

Issued at **Sandefjord** on **2018-05-11**

Nordholm, Aksel
David

Digitally signed by Nordholm,
Aksel David
Date: 2018.05.11 07:55:46 +02'00'

for **DNV GL**



Capt. Aksel David Nordholm
Manager Simulator Certification

Partha Basu
Auditor



Application/Limitation

The simulator is capable of simulating a realistic environment for all of the applicable STCW competence requirements referred to in the column for Class A, B, C and S in Table 5-2.

Table 5-2 Competencies addressed by radio communication simulator class

<i>STCW reference</i>	<i>Competence</i>	<i>Class A (COM)</i>	<i>Class B (COM)</i>	<i>Class C (COM)</i>	<i>Class S (COM)</i>
Table A-IV/2.1	Transmit and receive information using GMDSS subsystems and equipment and fulfilling the functional requirements of GMDSS	A	B	C	
Table A-IV/2.2	Provide radio services in emergencies	A	B	C	

This Statement of Compliance is for the manufacturer offering the simulator for examination or mandatory simulator training and complies with the requirements of DNVGL-ST-0033 Maritime Simulator Systems.

Based on this statement of compliance, maritime training providers in possession of simulators that comply with the requirements of the standard can apply for a product certificate for "Maritime simulator". The simulator's function area and the simulator class according to the standard will be stated on the certificate.

Certificate of Approval

This is to certify that the Management System of:

**Applied Research International Pvt.
Ltd.**

46/13, E-Block, Okhla Industrial Area, Phase-II, New Delhi, 110020, India

has been approved by Lloyd's Register to the following standards:


ISO 9001:2015

Approval number(s): ISO 9001 – 0048141

This certificate is valid only in association with the certificate schedule bearing the same number on which the locations applicable to this approval are listed.

The scope of this approval is applicable to:

The design and development of software, simulators, computer and model based training aids.



Luis Cunha

Area Operations Manager - SAMEA

Issued by: Lloyd's Register Quality Assurance Limited



001

Certificate Schedule

Location	Activities
46/13, E-Block, Okhla Industrial Area, Phase-II, New Delhi, 110020, India	ISO 9001:2015 Top Management
46/12, E-Block, Okhla Industrial Area, Phase II, New Delhi, India	ISO 9001:2015 The design and development of software, simulators, computer and model based training aids.
150/S, D Block, Chattarpur Extension, New Delhi, 110074, India	ISO 9001:2015 The design and development of software, simulators, computer and model based training aids.



001